

I/O System – 750 and 753 Series

I/O System – 750 and 753 Series

- Highly versatile
- More than 500 modules available
- Functional Safety
- Ex i

I/O System – 750 XTR Series

For demanding applications in which the following are critical:

- Extreme temperature stability
- Immunity to electromagnetic interference and impulse voltages
- Vibration and shock resistance

I/O System – 750 and 753 Series

Contents

		Page	
	General Product Information	138	
	Variants	139	
	Interfaces and Types	140	
	Marking and Mounting Accessories	141	
	Application and Installation Instructions	142	
	Item Number Key	144	
	Standards and Rated Conditions	145	
	Approvals	145	
	Fieldbus Couplers (FC) PROFINET IO, PROFIBUS, Ethernet TCP/IP, BACnet/IP, EtherCAT, Modbus/TCP, DeviceNet, CANopen, sercos, MODBUS, INTERBUS, CC-Link	5.1	146
	I/O Modules	5.2	162
	Digital Input Modules (DI)		162
	Digital Output Modules (DO)	5.3	192
	Analog Input Modules (AI)	5.4	212
	Analog Output Modules (AO)	5.5	246
	Function/Technology Modules	5.6	256
	Communication Modules	5.7	276
	Functional Safety Modules	5.8	296
	Intrinsically Safe Modules	5.9	308
	Supply/Segment Modules	5.10	322
	Accessories Marking and Mounting Accessories	Section 10	322

I/O System – 750 and 753 Series – One System for Every Application

General Product Information

One System for Every Application

The WAGO-I/O-SYSTEM 750/753 is characterized by its universal application scope and extensive product portfolio. With more than 500 different modules, the versatility and flexibility is so great that virtually every requirement in a wide range of industries is covered.

Industrial Automation

The comprehensive selection of I/O modules for different potentials and signal types saves time and money because the sensors/actuators can be wired directly – even in safety-related applications.

Building Automation

The broad portfolio enables flexible, ceiling-to-ceiling solutions with conventional I/O modules, standardized industry-specific fieldbus protocols and subsystems for typical applications in lighting, shading, heating, HVAC and much more.

Marine and Onshore/Offshore Automation

International approvals coupled with industry-specific features permit use in shipbuilding and other harsh sectors. Addressing requirements inherent in specific industries and operating environments has enabled use on marine diesels and in the EMC-sensitive area of a vessel's bridge. Because the requirements are significantly greater for immunity to interference or emission of interference, along with superior mechanical performance in these sensitive areas, the WAGO-I/O-SYSTEM can readily meet the needs of other industries.

Process Automation

Even under the harshest environmental conditions, use is possible with special approvals. Potential hazardous area applications include oil and gas production, the chemical industry and power generation. The WAGO-I/O-SYSTEM can be installed in Zone 2/22 with its intrinsically safe I/O modules, making it possible to connect sensors/actuators in Zones 1/21 and 0/20.

Maximum Fieldbus Independence

The system's modularity is also reflected in its support for numerous fieldbus systems and ETHERNET standards. Depending on the application, it is possible to choose between fieldbus couplers and communication modules for different protocols.

Easy to Use

A modular, DIN-rail-mount design permits easy installation, expansion and modification of the I/O node without tools. The streamlined design prevents installation errors. In addition, proven CAGE CLAMP® technology offers fast, vibration-proof and maintenance-free connections that are independent of operator skill. Depending on the I/O module's granularity, field peripherals can be directly wired using 1-, 2-, 3- or 4-wire technology.

Worldwide Approvals

International approvals for building and industrial automation, as well as the process and marine industries, guarantee worldwide use – even under more rigorous operating conditions including ATEX, BR-Ex, IECEx, UL508, UL ANSI/ISA, AEx and numerous marine certifications.



Advantages:

- Fieldbus-independent – support all standard fieldbus protocols and ETHERNET standards
- Flexible platform adapts to diverse applications and environments
- Tested and approved worldwide
- Extensive range of accessories for marking systems and connection technologies
- Vibration-proof, fast and maintenance-free CAGE CLAMP® connections

Extremely Compact

WAGO's patented mechanical design leads to extremely compact I/O nodes. In fact, it can accommodate up to 16 channels in a module width of 12 mm (1/2").

- Finely granular I/O modules provide node customization.
- Space-saving design permits high integration density and direct connection.

Maximum Reliability and Ruggedness

The WAGO-I/O-SYSTEM is engineered and tested for use in the most demanding environments in accordance with the highest standards, e.g., those required in marine applications. The system is distinguished from other products that are solely intended for industrial use because of:

- Greatly increased vibration rating
- Significantly greater immunity to interference (ESD)
- Lower emission of interference
- Larger voltage fluctuation range
- Greater durability for continuous operation in upper temperature ranges

In addition, CAGE CLAMP® spring pressure connections ensure superior reliability.

Integrated QA measures in the production process and 100% function testing ensure consistent quality.


Clear Identification

Module functionality is identified via integrated or pluggable marker carriers. Terminal assignment and technical data are printed onto the side of the I/O module. WAGO's WSB Marking System also allows for module- and channel-related identification.

I/O System – 750 and 753 Series

Variants

Pluggable Connector

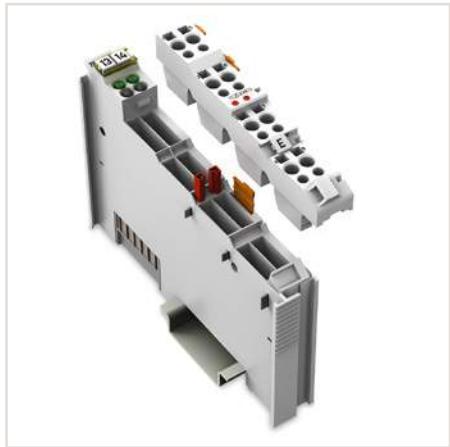

The pluggable connections of the WAGO-I/O-SYSTEM 753 allow quick and safe replacement. Optional coding pins prevent inserting the pluggable connector in the wrong I/O module. Replacing and connecting the I/O module requires no further action and eliminates possible errors – essentially serving as permanent wiring. Alternatively, field wiring is possible via interface modules that can be connected to the I/O system using a ribbon cable (see "Types").

Functional Safety



In the European Union, the machinery directive defines the requirements for machine and system safety. This ensures a uniform standard for the protection of "life and limb" for people within a machine's operating area.

The required risk assessment is based on harmonized standards (e.g., EN 13849) that identify existing risks and required risk reduction (SIL or PL quality). Based on the risk assessment, safety functionality can be implemented, e.g., by presence detection or protection zone violations using secure switches or light arrays to immediately shut down the "risk." For this purpose, the safety signals are detected by the "yellow" safety modules and transmitted via "PROFIsafe" to the fail-safe PLC for further processing. The result is then executed via safe actuator (e.g., output module or controller).

The uniquely characteristic safety values of the WAGO modules facilitate calculation of the final safety function up to Cat. 4/PLe according to EN 13849, or SIL3 according to EN 62061 or IEC 61511.

The mixed operation of safe and conventional I/O modules streamlines system configuration. For increased electromagnetic immunity (EMC standard), WAGO offers compact power supply filter modules. Specific power supply features must be considered, which are described in detail in the corresponding manuals.

Use in Hazardous Areas



In many plants across the chemical and petrochemical industries, as well as in the production and process automation sectors, installations are operated that process explosive gas- or dust-air mixtures. This is why electrical equipment must be explosion-proof in order to avoid injuries to personnel and damage to facilities.

The modules within the WAGO-I/O-SYSTEM 750 are designed for use in both non-hazardous and hazardous areas.

The direct application of fieldbus technology in hazardous areas is typically resource-intensive. When used in hazardous areas of Zone 2/22, the WAGO-I/O-SYSTEM 750 offers a safe, easy and economical connection to the sensors and actuators of Zones 0/20 and 1/21. The "blue" Ex i I/O modules were specially developed for this purpose. They form an intrinsically safe section that can be integrated into a standard fieldbus node, offering all the advantages of state-of-the-art fieldbus technology. The WAGO-I/O-SYSTEM 750 is also approved for mining applications.

Extended Temperature Range




Industrial automation technology is typically operated in temperatures ranging from 0 °C to 55 °C. However, there are applications that require an extended temperature range. For these applications, WAGO offers a line of WAGO-I/O-SYSTEM 750 products for temperatures ranging from -20°C to +60°C. For extreme applications, where even this extended temperature range is not sufficient, the WAGO-I/O-SYSTEM 750 XTR is available.

I/O System – 750 and 753 Series

Interfaces and Types


5

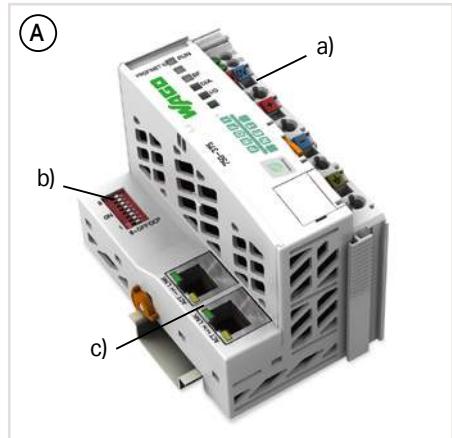

(A)

Housing design: fieldbus coupler (A)


- Including supply module (a) to power downstream I/O modules
- Technical differences on the connection level; optional addressing switch (b) and fieldbus interface (c)
- W x H x D (mm) 50.5 x 71.1 x 100 or
W x H x D (mm) 61.5 x 71.9 x 100

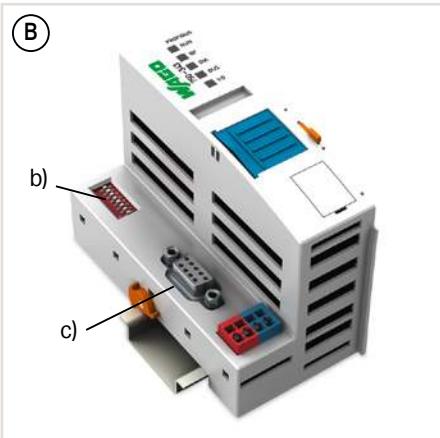

(B)

Housing design: fieldbus coupler ECO (B)

- Restriction on power supply and data width
- W x H x D (mm) 49.5 x 71.9 x 96.8

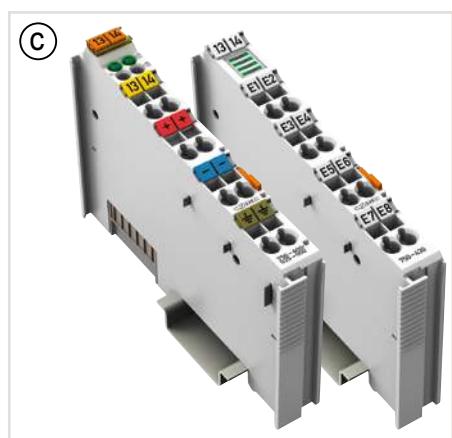

(C)

Housing design: 750 (C)

- 8 connection points (CAGE CLAMP®)
- W x H x D (mm) 12 x 69.8 x 100 (4 LEDs)
- W x H x D (mm) 12 x 67.8 x 100 (8 LEDs)



(D)

Housing design: 753 (D)

- Pluggable Connector
- 8 connection points (CAGE CLAMP®)
- W x H x D (mm) 12 x 69.8 x 100 (4 LEDs)
- W x H x D (mm) 12 x 69 x 100 (8 LEDs)
- Pluggable connectors and coding fingers are not included.



(E)

Housing design: 750 (E)

- 16 connection points (Push-in CAGE CLAMP®)
- W x H x D (mm) 12 x 69 x 100



(F)

Housing design (F)


- For time-saving wiring between I/O system and interface modules
- Ribbon cable connection to interface modules (289 and 704 Series) and interface adapter
- W x H x D (mm) 12 x 74.1 x 100



(G)

Housing design: double width (G)

- Some modules are integrated into a double housing to address specific technological needs. Despite utilizing the same standardized housing, these modules are twice as wide.
- W x H x D (mm) 24 x 69.8 x 100

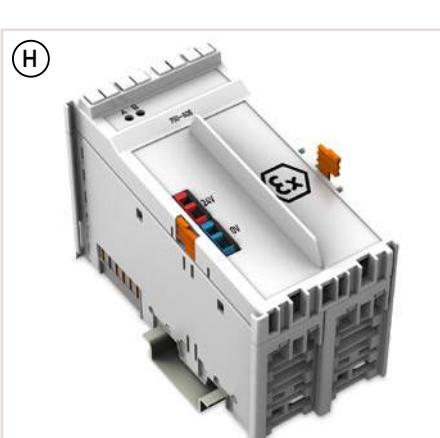

(H)

Special housing design (H)


- Some modules are integrated into a specialized housing with a specific width and pluggable connectors. The dimensions are specified on the respective catalog page.

I/O System – 750 and 753 Series


Marking and Mounting Accessories



Transparent group marker carriers indicate module type by color.

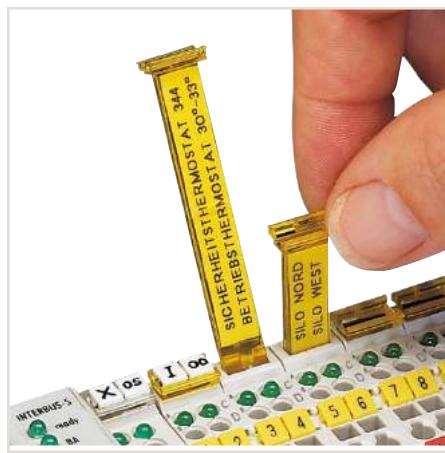


Removable group marker carriers are available for all 750 and 753 Series I/O Modules with a maximum of four LEDs, as well as all fieldbus couplers with a supply module.

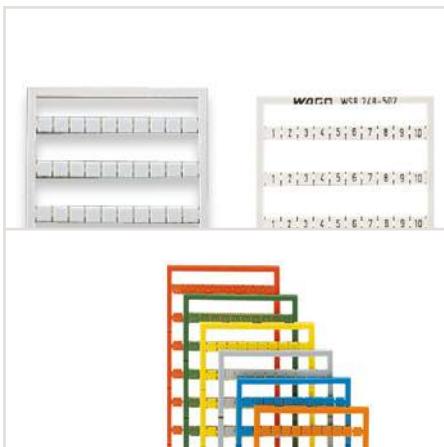


Mini-WSB Quick Marking System, blank, pre-marked and colored; suitable for all 750 and 753 Series I/O Modules.



Marker carrier for one single I/O module (suitable for all 750 and 753 Series I/O Modules); the marker carrier can be accommodated in the upper Mini-WSB marker slot.

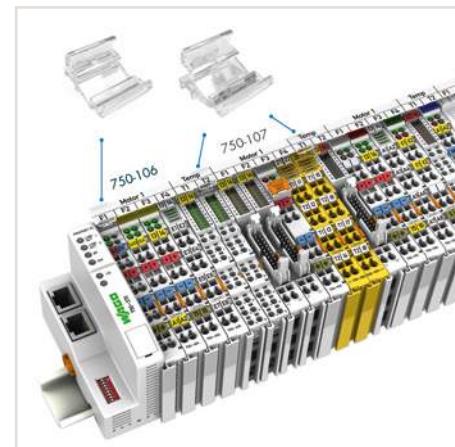

Marker carrier for one I/O node; both carrier models (750-106 and 750-107) permit continuous marking regardless of the I/O module housing used.

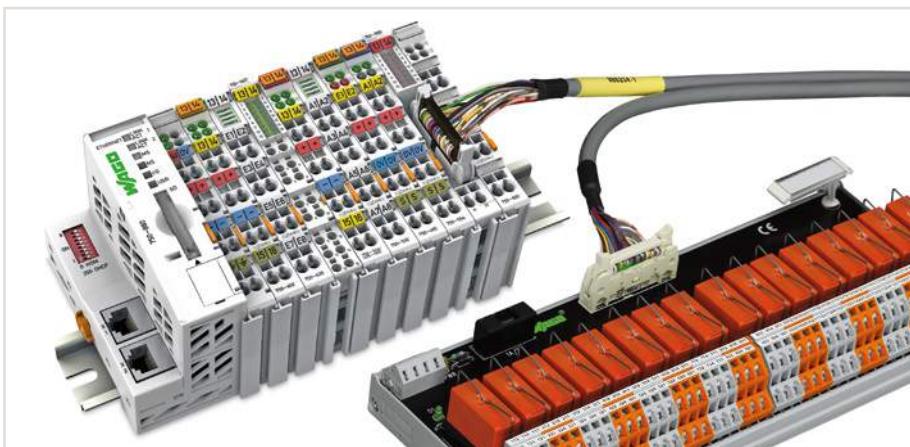

Interface modules for system wiring



Interface cables

I/O System – 750 and 753 Series

Application and Installation Instructions

Power Supply

The internal electronics are powered by the fieldbus coupler. The field-side power supply is electrically isolated via the supply module on the coupler or a separate power supply module. This division enables a separate supply for sensors and actuators. Snapping the I/O modules together automatically routes the supply voltages (system power supply 5 VDC via the data contacts and field supply via the optional power jumper contacts).

Supply modules with diagnostics also enable power supply monitoring. This ensures a flexible, user-specific supply design for a station.


Power supply to the electronics is limited by a maximum value. This value depends on the fieldbus coupler used. If the sum of the internal current demand of all the I/O modules should exceed this value, an additional system supply module is necessary. Even in this case, power supply to the field-side supply of 10 A may not be exceeded. However, different power supply modules allow a new power supply, formation of potential groups and the implementation of emergency stop concepts.

Interference-Free in Safety-Related Applications

To easily and safely perform cost-effective, centralized deactivation of complete actuator groups, the actuator's power supply can be switched off using a safety switching device. This can either be performed for each individual actuator or by turning off the power supply to a group of control outputs. In the event of failure, ensure that no interference from other current or power circuits occurs – even when the control voltage is switched off – so the defined safety function properties (logic and time response) remain unchanged.

Some modules are designed to provide interference-free safety functionality. These modules comply with safety requirements up to Category 4 of DIN EN ISO 13849-1:2007. Safety category and performance level depend solely on the safety components and their wiring.

5

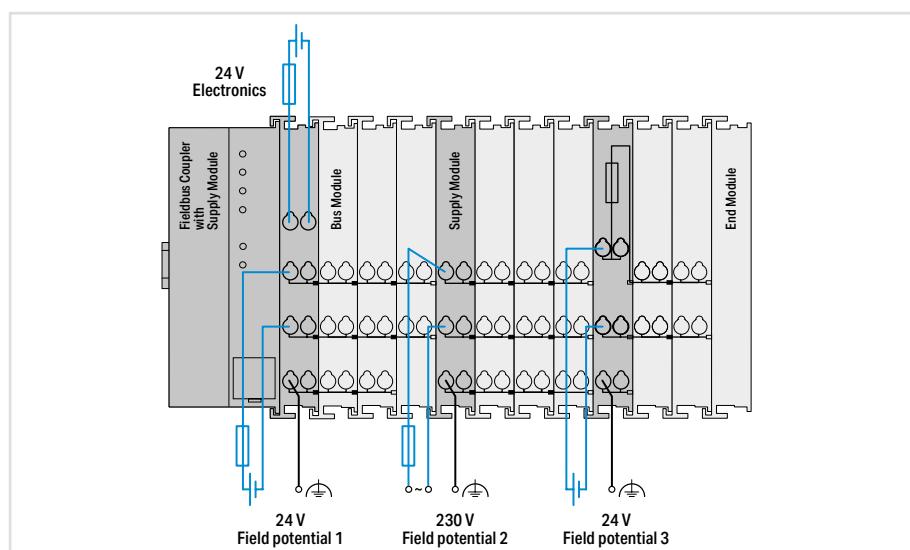

Notice:

WAGO's interference-free I/O modules are not a component of the safety function and do not replace the safety switching device! When using the components in safety functions, the corresponding notes must be observed in the relevant manual.

Notes:

Additional steps must be implemented based on where the I/O system is installed:

Specific field-side power supply filters (750-624) or power supply filters (750-626) are required for marine and onshore/offshore applications.


A specific supply module (750-606) is required to operate intrinsically safe Ex i modules.

Additionally, both supply modules and field-side power supply filters are recommended

when operating intrinsically safe Ex i modules for marine and onshore/offshore applications.

For the 24 VDC power supply of electronics and field, PELV/SELV power supply units are recommended. As part of safety-related applications, they are mandatory. The mixed operation of safe and conventional I/O modules streamlines system configuration. For increased electromagnetic immunity (EMC standard), WAGO offers compact power supply filter modules.


Please refer to the manual for details about the power supply's design.

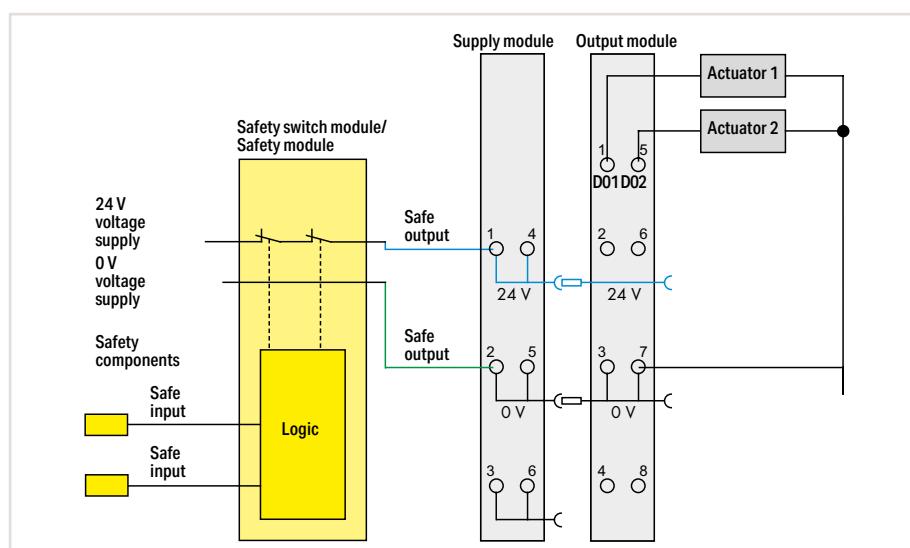


Example: 2-channel, double-pole power supply disconnection

I/O System – 750 and 753 Series

Application and Installation Instructions

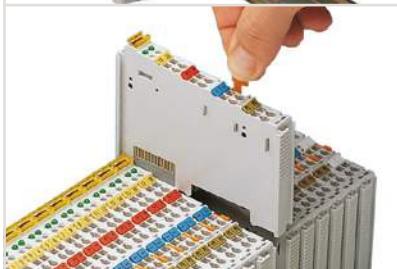

Securing/removing a module from the mounting rail.

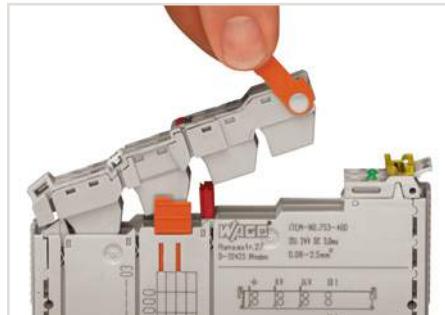

Releasing a pluggable connector.



Optional protection against mismatching of pluggable connectors via coding elements



Service interface for configuring the fieldbus coupler; connectivity via configuration cable or radio adapter

Notice:


For some I/O modules, not all power jumper contacts are made! A module with three power jumper contacts (e.g., 2-channel digital input) cannot be snapped into place behind a module in which not every contact is made.

To increase electromagnetic compatibility (EMC), some components are connected to the DIN-rail by a discharge contact. The DIN-rail must always have a low-resistance connection to the ground potential.



Wide range of accessories available for EMC-compliant installation, including shield connection

5

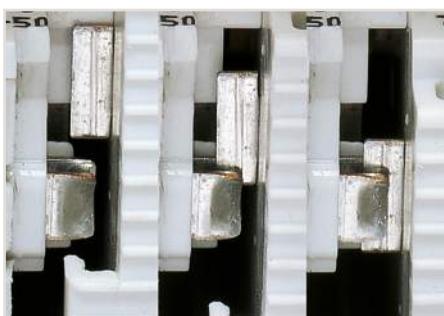

Secure, automatic power supply connection via self-cleaning blade contacts



Secure, automatic data and electronics power supply connection via gold-plated pressure contacts




Securing a cable to the connector.

I/O System – 750 and 753 Series

Item Number Key

Explanation of item number key's components

Item No.: 75x-yzz	 750 Series: Standard 753 Series: Pluggable connector
01zz:	Marker
03zz:	Fieldbus coupler
zz:	Consecutive number
1yzz:	16 connection points or ribbon cable
y4zz:	Input 00 ... 49 = Digital input 50 ... 99 = Analog input
y5zz:	04: Counter Output 00 ... 49 = Digital output 50 ... 99 = Analog input
y6zz:	11: PWM Function/technology/communication/system module 0z: Power supply, field-side connection, end module 1z: Power supply, field-side connection, spacer module 2z: Power supply, bus extension, filter, spacer module 3z: Distance and angle measurement, DC drive controller, counter 4z: Communication (building), radio, RTC, vibration monitoring 5z: Serial interfaces, communication 6z: Functional safety .../000-001: PROFIsafe V1.3 .../000-002: PROFIsafe V2 .../000-003: PROFIsafe V2 iPar
7z:	Stepper
09zz:	Accessories
	.../025-000: Extended temperature range of -20 to +60 °C
	.../000-800: Interference-free
	.../040-000: 750 XTR Series, see Section 6

I/O System – 750 and 753 Series

Standards and Rated Conditions

General Specifications	
Supply voltage (system)	24 VDC (-25 % ... +30 %)*; *for all marine-certified fieldbus couplers and I/O modules
Isolation	500 V (system/supply)
Surrounding air temperature (operation)	0 ... +55 °C
Surrounding air temperature (operation) for versions with an extended temperature range	-20 ... +60 °C
Surrounding air temperature (storage)	-40 ... +85 °C
Relative humidity	95 % (non-condensing)
Relative humidity for versions with an extended temperature range	Max. 95 %; short-term condensation per Class 3K6 / IEC EN 60721-3-3 and E DIN 40046-721-3, taking a temperature range of -20 to +60 °C into consideration (except wind-driven precipitation, water and ice formation)
Operating altitude	0 ... 2000 m
Pollution degree	2 per IEC 61131-2
Vibration resistance	0.5g (4g for all marine-certified fieldbus couplers and I/O modules) per IEC 60068-2-6
Shock resistance	15g per IEC 60068-2-27
EMC immunity to interference	Per EN 61000-6-2
EMC emission of interference	Per EN 61000-6-3; EN 61000-6-4
Protection type	IP20
Mounting type	DIN-35 rail mounting
Housing material	Polycarbonate; polyamid 6.6
Exposure to pollutants	Per IEC 60068-2-42 and IEC 60068-2-43
Permissible SO ₂ contaminant concentration at a relative humidity < 75 %	25 ppm
Permissible H ₂ S contaminant concentration at a relative humidity < 75 %	10 ppm
Connection technology	CAGE CLAMP®
Conductor cross section; strip length for Standard modules and couplers: I/O modules, 753 Series: ECO fieldbus couplers:	0.08 ... 2.5 mm ² /28 ... 14 AWG; 8 ... 9 mm/0.31 ... 0.35 inch 0.08 ... 2.5 mm ² /28 ... 14 AWG; 9 ... 10 mm/0.35 ... 0.39 inch 0.08 ... 1.5 mm ² /28 ... 16 AWG; 5 ... 6 mm/0.2 ... 0.24 inch
Connection technology	Push-in CAGE CLAMP®
Conductor cross section; strip length for I/O modules with 16 connection points:	Solid: 0.08 ... 1.5 mm ² /28 ... 16 AWG, Fine-stranded: 0.25 ... 1.5 mm ² /22 ... 16 AWG; 8 ... 9 mm/0.31 ... 0.35 inch
Current carrying capacity (power jumper contacts)	10 A

Approvals

Overview of the approvals in the item comparison in Section 11, Technical Section, or online under www.wago.com



Fieldbus Couplers

Housing design I with field supply

Dimensions W x H x D	50.5 x 71.1 x 100 mm
Height from upper-edge of DIN-rail	63.9 mm
Connection technology: System supply and field supply	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch



Housing design II with field supply

Dimensions W x H x D	61.5 x 71.9 x 100 mm
Height from upper-edge of DIN-rail	64.7 mm
Connection technology: System supply and field supply	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch



Housing design without field supply

Dimensions W x H x D	49.5 x 71.9 x 96.8 mm
Height from upper-edge of DIN-rail	64.7 mm
Connection technology: System supply	CAGE CLAMP®
Conductor cross section	0.08 ... 1.5 mm ² / 28 ... 16 AWG
Strip length	5 ... 6 mm / 0.22 inch



Housing design "Eco" (without field supply)

Dimensions W x H x D	49.5 x 71.9 x 96.8 mm
Height from upper-edge of DIN-rail	64.7 mm
Connection technology: System supply	CAGE CLAMP®
Conductor cross section	0.08 ... 1.5 mm ² / 28 ... 16 AWG
Strip length	5 ... 6 mm / 0.22 inch



I/O System – 750 and 753 Series, Fieldbus Couplers

Contents

Fieldbus System	Housing Design				Description	Item No.	Page
	With Field Supply		Without Field Supply	Eco			
	<input type="checkbox"/>				PROFINET IO; 3rd generation; Advanced	750-375	148
	<input type="checkbox"/>				PROFINET IO; 3rd generation; Extended temperature; Advanced	750-375/025-000	148
		<input type="checkbox"/>			PROFINET IO; 3rd generation; Eco Advanced	750-377	148
		<input type="checkbox"/>			PROFINET IO; 3rd generation; Extended temperature; Eco Advanced	750-377/025-000	148
	<input type="checkbox"/>				PROFIBUS DP; 1st generation; 12 MBd	750-303	149
	<input type="checkbox"/>				PROFIBUS DP; 2nd generation; 12 MBd	750-333*	149
	<input type="checkbox"/>				PROFIBUS DP; 2nd generation; 12 MBd; Extended temperature	750-333/025-000	149
			<input type="checkbox"/>		PROFIBUS DP; 12 MBd; Eco	750-343	150
			<input type="checkbox"/>		PROFIBUS DP; Fiber-optic connection; 1.5 MBd	750-331	150
		<input type="checkbox"/>			ETHERNET; 3rd generation	750-352*	151
		<input type="checkbox"/>			ETHERNET; 3rd generation	750-352/000-001	151
		<input type="checkbox"/>			Modbus TCP; 4th generation	750-362	151
	<input type="checkbox"/>				ETHERNET; 1st generation	750-342	152
	<input type="checkbox"/>				BACnet/IP	750-330	153
		<input type="checkbox"/>			EtherCAT	750-354	154
		<input type="checkbox"/>			EtherCAT; ID switch	750-354/000-001	154
		<input type="checkbox"/>			EtherCAT; ID switch; Diagnostics	750-354/000-002	154
	<input type="checkbox"/>				DeviceNet	750-306	155
			<input type="checkbox"/>		DeviceNet; Eco	750-346	155
	<input type="checkbox"/>				CANopen	750-307	156
	<input type="checkbox"/>				CANopen; MCS	750-337	156
	<input type="checkbox"/>				CANopen; MCS; Extended temperature	750-337/025-000	156
	<input type="checkbox"/>				CANopen; D-Sub	750-338*	157
			<input type="checkbox"/>		CANopen; MCS; Eco	750-347	157
			<input type="checkbox"/>		CANopen; D-Sub; Eco	750-348	157
	<input type="checkbox"/>				Sercos®	750-351	158
	<input type="checkbox"/>				MODBUS; RS-485; 115.2 kBd	750-315/300-000	159
	<input type="checkbox"/>				MODBUS; RS-232; 115.2 kBd	750-316/300-000	159
	<input type="checkbox"/>				INTERBUS	750-304	160
			<input type="checkbox"/>		INTERBUS; 500 kBit/s; Eco	750-344	160
	<input type="checkbox"/>				CC-Link	750-310	161
		<input type="checkbox"/>			CC-Link; 156 kBaud ... 10 MBaud	750-325	161

*This coupler is also available as a 750 XTR Series variant.

See Section 6



Fieldbus Coupler PROFINET IO



Figure: 750-375



Figure: 750-377

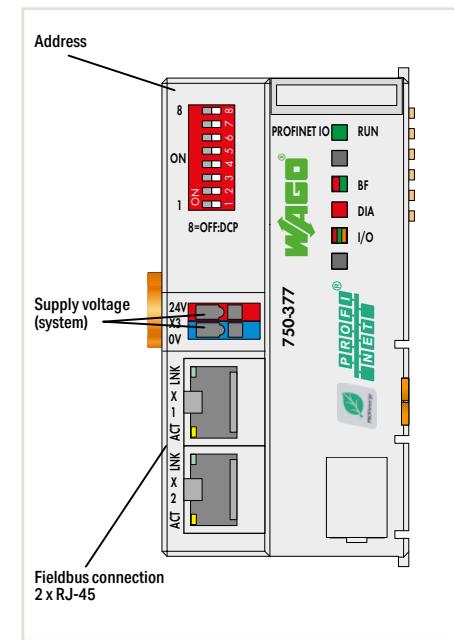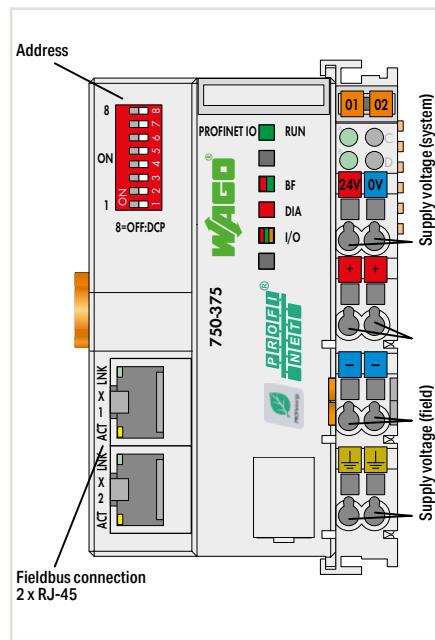

Item Description	Fieldbus Coupler PROFINET IO; 3rd generation; Advanced	
Version	Standard	Extended Temperature
Item No.	750-375	750-375/025-000
Order Text	FC PROFINET; G3; Adv	FC PROFINET; G3; T; Adv

Item Description	Fieldbus Coupler PROFINET IO; 3rd generation; Eco Advanced	
Version	Standard	Extended Temperature
Item No.	750-377	750-377/025-000
Order Text	FC PROFINET; G3; Eco Adv	FC PROFINET; G3; T; Eco Adv

Technical Data	PROFINET IO	
Fieldbus	PROFINET IO V2.3 (conformity class C); Topology detection / LLDP; Network diagnostics / SNMP / MIB-2; Media redundancy / MRP; Webserver / HTTP; Shared device	
Protocols	PROFIsafe V2; PROFlenergy V1.0	
Supported profiles	Integrated 2-port switch; Auto-negotiation; Auto-MDIX; Isochronous real-time communication; Transmission clock: 1 ms (RT); 1, 2, 4 ms (IRT); Device replacement without programming tool	
PROFINET IO features	2 x RJ-45	
Connection technology: Fieldbus input/output	10 Mbit/s (ETHERNET protocols); 100 Mbit/s full duplex (PROFINET IO)	
Baud rate	Twisted Pair S-UTP; 100 Ω; Cat. 5	
Transmission medium	250	
Number of modules per node (max.)	512 bytes	
Input and output (internal) process image (max.)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	
Supply voltage (system)	24 VDC (-25 ... +30 %); via power jumper contacts	
Supply voltage (field)	500 mA	
Input current (typ.) at nominal load (24 V)	450 mA	
Current consumption – system supply (5 V)	1700 mA	
Total current (system supply)	0 ... +55 °C	-20 ... +60 °C
Surrounding air temperature (operation)	61.5 x 71.9 x 100 mm	
Dimensions W x H x D		280 mA
Approvals	CE; IECEx Marine; ATEX/IECEx	450 mA
Data sheet and further information, see:	wago.com/750-375	700 mA

PROFINET IO	PROFINET IO	
PROFINET IO V2.3 (conformity class C); Topology detection / LLDP; Network diagnostics / SNMP / MIB-2; Media redundancy / MRP; Webserver / HTTP	PROFIsafe V2; PROFlenergy V1.0	
Integrated 2-port switch; Auto-negotiation; Auto-MDIX; Isochronous real-time communication; Transmission clock: 1 ms (RT); 1, 2, 4 ms (IRT); Device replacement without programming tool	Integrated 2-port switch; Auto-negotiation; Auto-MDIX; Isochronous real-time communication; Transmission clock: 1 ms (RT); 1, 2, 4 ms (IRT); Device replacement without programming tool	
2 x RJ-45	2 x RJ-45	
10 Mbit/s (ETHERNET protocols); 100 Mbit/s full duplex (PROFINET IO)	10 Mbit/s (ETHERNET protocols); 100 Mbit/s full duplex (PROFINET IO)	
Twisted Pair S-UTP; 100 Ω; Cat. 5	Twisted Pair S-UTP; 100 Ω; Cat. 5	
250	64	
512 bytes	256 bytes	
24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-25 ... +30 %); via wiring interface	
24 VDC (-25 ... +30 %); via power jumper contacts		280 mA
500 mA		450 mA
450 mA		700 mA
1700 mA	0 ... +55 °C	-20 ... +60 °C
0 ... +55 °C		49.5 x 71.9 x 96.8 mm
-20 ... +60 °C		CE; IECEx Marine; ATEX/IECEx
61.5 x 71.9 x 100 mm		CE; IECEx Marine; ATEX/IECEx
		wago.com/750-377

- “ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"
- “ Approvals and corresponding ratings, see page 517 or www.wago.com



Fieldbus Coupler PROFIBUS DP



Figure: 750-303



Figure: 750-333

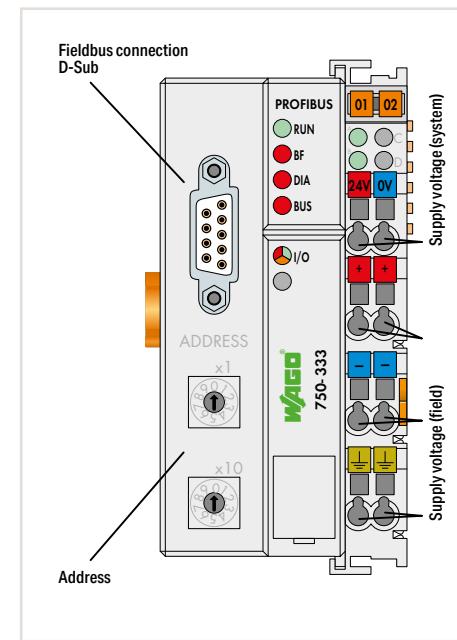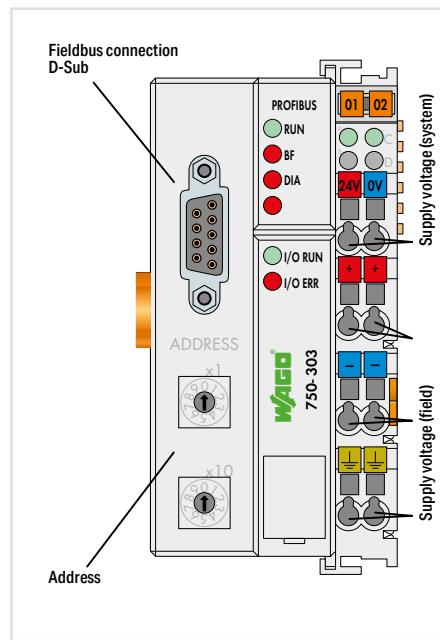

Item Description	Fieldbus Coupler PROFIBUS DP; 1st generation; 12 MBd	
Version	Standard	Extended Temperature
Item No.	750-303	750-333/025-000
Order Text	FC PROFIBUS; G1; 12MBd	FC PROFIBUS; G2; 12MBd; T
Technical Data		
Fieldbus	PROFIBUS	
Protocols	PROFIBUS DP/FMS	
Connection technology: Fieldbus input/output	Socket D-Sub 9	
Number of fieldbus nodes on master (max.)	96 with repeater	
Baud rate	9.6 kBd ... 12 MBd	
Transmission medium	Copper cable per EN 50170	
Number of modules per node (max.)	64	
Input and output (internal) process image (max.)	128 bytes	
Supply voltage (system)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts	
Input current (typ.) at nominal load (24 V)	500 mA	
Current consumption – system supply (5 V)	350 mA	
Total current (system supply)	1650 mA	
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C
Dimensions W x H x D	50.5 x 71.1 x 100 mm	
Approvals	CE; UL; Marine; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-303	
Accessories	Item No.	Item No.
GSD files	Download: www.wago.com	Download: www.wago.com



Fieldbus Coupler PROFIBUS DP



Figure: 750-343



Figure: 750-331

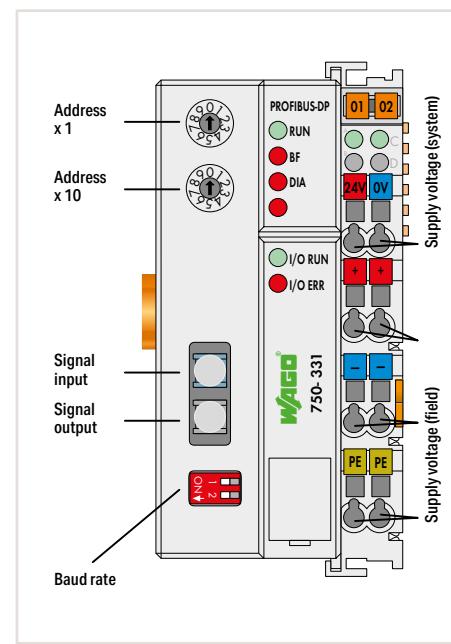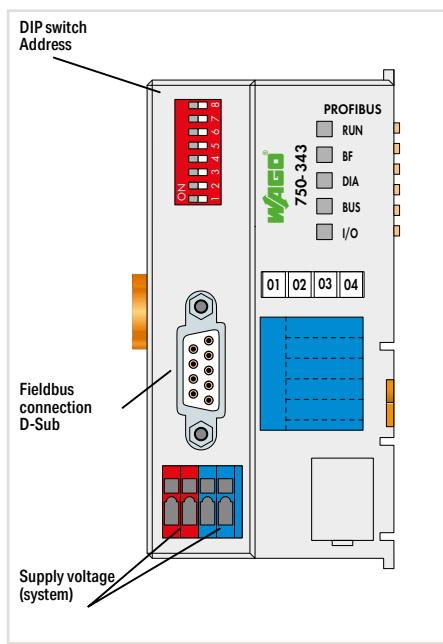

Item Description	Fieldbus Coupler PROFIBUS DP; 12 MBd; Eco	
Item No.	750-343	750-331
Order Text	FC PROFIBUS; 12MBd; Eco	FC PROFIBUS; FOC; 1.5MBd
Technical Data		
Fieldbus	PROFIBUS	PROFIBUS
Protocols	PROFIBUS DP	PROFIBUS DP
Connection technology: Fieldbus input/output	Socket D-Sub 9	HP Simplex; Fiber optic plug (included)
Number of fieldbus nodes on master (max.)	125 with repeater	10 in subring
Transmission medium	Copper cable per EN 50170	Fiber optic cable (All Plastic Fiber)
Baud rate	9.6 kBd ... 12 MBd	93.75 kBd ... 1500 kBd
Number of modules per node (max.)	63	64
Input and output (internal) process image (max.)	32 bytes	128 bytes
Supply voltage (system)	24 VDC (-25 ... +30 %); via wiring interface	24 VDC (-15 ... +20 %); via wiring interface (CAGE CLAMP® connection)
Supply voltage (field)		24 VDC (-15 ... +20 %); via power jumper contacts
Input current (typ.) at nominal load (24 V)	260 mA	500 mA
Current consumption – system supply (5 V)	350 mA	350 mA
Total current (system supply)	650 mA	1650 mA
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	49.5 x 71.9 x 96.8 mm	50.5 x 71.1 x 100 mm
Approvals	CE; IEC 60068-2-29; Marine; IEC 60068-2-30; OrdLoc/HazLoc; ATEX/IECEx	CE; IEC 60068-2-29; OrdLoc
Data sheet and further information, see:	wago.com/750-343	wago.com/750-331
Accessories	Item No.	
GSD files	Download: www.wago.com	

5.1


„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 517 or www.wago.com

Fieldbus Coupler ETHERNET; Modbus TCP



Figure: 750-352

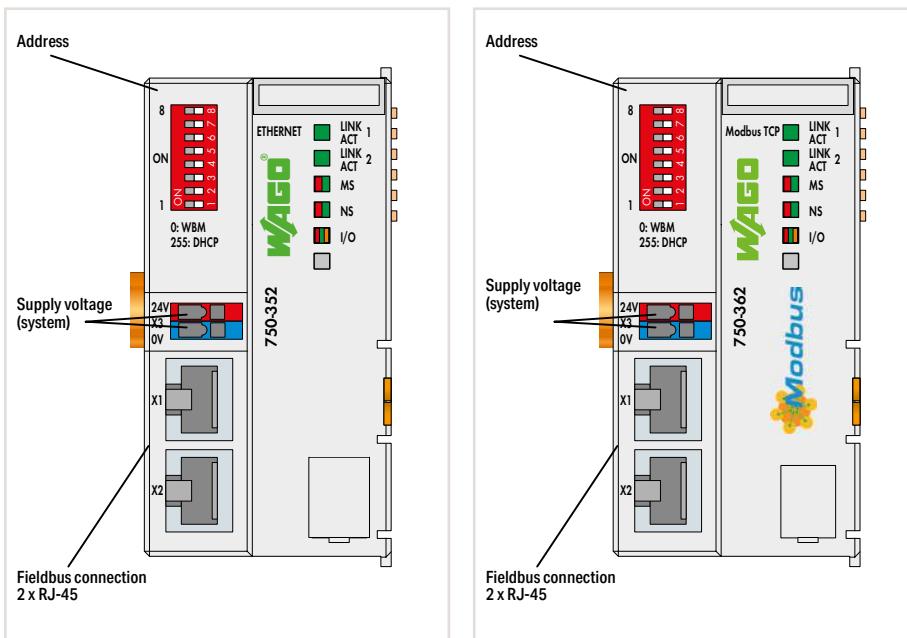

Item Description
Version
Item No.
Order Text

Fieldbus Coupler ETHERNET; 3rd generation

Standard	Eco
750-352	750-352/000-001
FC ETHERNET; G3	FC ETHERNET; G3; Eco

For new installations, please consider the 750-362 Fieldbus Coupler with extended functionality.

Fieldbus Coupler Modbus TCP; 4th generation
Standard
750-362
FC Modbus TCP; G4

Technical Data

Fieldbus	EtherNet/IP*
Protocols	HTTP; BootP; DHCP; DNS; FTP; SNMP
Connection technology: Fieldbus input/output	2 x RJ-45
Bus segment length (max.)	100 m
Baud rate	10/100 Mbit/s
Transmission medium	Twisted Pair S-UTP; 100 Ω; Cat. 5
Number of modules per node (max.)	250
Input and output (internal) process image (max.)	1020 words
Supply voltage (system)	24 VDC (-25 ... +30 %); via wiring interface
Input current (typ.) at nominal load (24 V)	280 mA
Current consumption – system supply (5 V)	450 mA
Total current (system supply)	700 mA
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	49.5 x 71.9 x 96.8 mm

Approvals

Data sheet and further information, see:

EtherNet/IP*; Modbus (TCP, UDP)	Modbus (TCP, UDP)
HTTP; BootP; DHCP; DNS; FTP; SNMP	HTTP(S), BootP, DHCP, DNS, (S)FTP, SNMP
2 x RJ-45	RJ-45
100 m	100 m
10/100 Mbit/s	10/100 Mbit/s
Twisted Pair S-UTP; 100 Ω; Cat. 5	Twisted Pair S-UTP; 100 Ω; Cat. 5
250	250
1020 words	1020 words
24 VDC (-25 ... +30 %); via wiring interface	24 VDC (-25 ... +30 %); via wiring interface
280 mA	280 mA
450 mA	350 mA
700 mA	700 mA
0 ... +55 °C	0 ... +55 °C
49.5 x 71.9 x 96.8 mm	49.5 x 71.9 x 96.8 mm

CE;


wago.com/750-352

*For variant 750-352/000-001, EtherNet/IP is activated as a standard protocol.	*Pending
--	----------

CE;

wago.com/750-362


Fieldbus Coupler ETHERNET

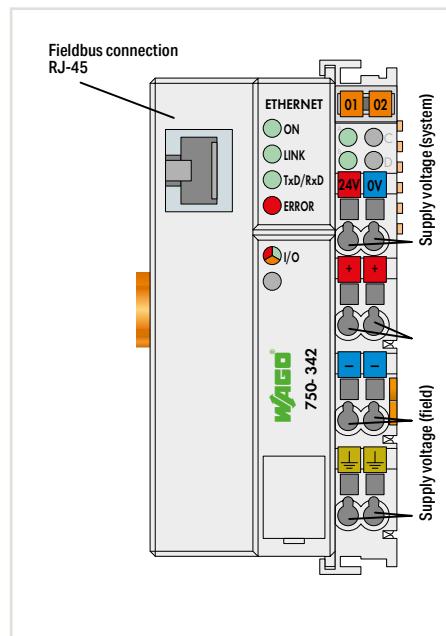

Item Description	Fieldbus Coupler ETHERNET; 1st generation	
Item No.	750-342	
Order Text	FC ETHERNET; G1	
Technical Data		
Fieldbus	Modbus (TCP, UDP)	
Protocols	HTTP; BootP	
Connection technology: Fieldbus input/output	RJ-45	
Bus segment length (max.)	100 m	
Baud rate	10 Mbit/s	
Transmission medium	Twisted Pair S-UTP; 100 Ω; Cat. 5	
Number of modules per node (max.)	64	
Input and output (internal) process image (max.)	512 bytes	
Supply voltage (system)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts	
Input current (typ.) at nominal load (24 V)	500 mA	
Current consumption – system supply (5 V)	200 mA	
Total current (system supply)	1800 mA	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	50.5 x 71.1 x 100 mm	
Approvals	CE; ⚡ Marine; ⚡ OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-342	

- „ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"
- „ Approvals and corresponding ratings,
see page 517 or www.wago.com

Fieldbus Coupler BACnet/IP

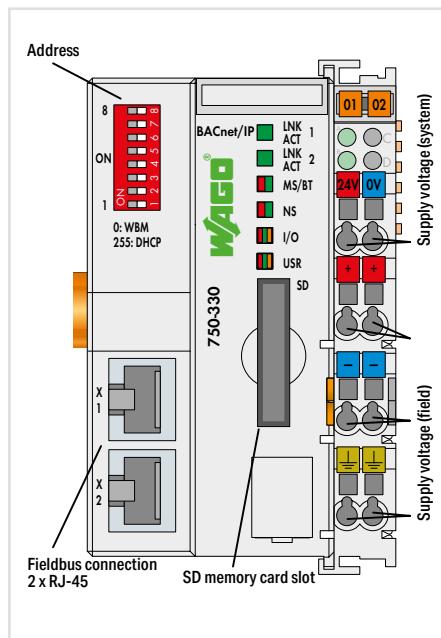

Item Description
Item No.
Order Text

Fieldbus Coupler BACnet/IP
750-330

Technical Data
Fieldbus
Protocols
Connection technology: Fieldbus input/output
Transmission medium
Baud rate
Transmission performance
Type of memory card
BACnet device profile
BACnet revision
Number of modules per node (max.)
Supply voltage (system)
Supply voltage (field)
Input current (typ.) at nominal load (24 V)
Current consumption – system supply (5 V)
Total current (system supply)
Surrounding air temperature (operation)
Dimensions W x H x D
Approvals
Data sheet and further information, see:
Accessories
SD memory card, 2 GB
BACnet Configurator

BACnet/IP; Modbus (TCP, UDP)
HTTPS; BootP; DHCP, DNS; FTP; SNMP
2 x RJ-45
Twisted Pair S-UTP; 100 Ω; Cat. 5; Line length (max.): 100 m
10/100 Mbit/s
Class D per EN 50173
SD and SDHC to 32 GB*
B-BC (BACnet Building Controller)
1.12
99
24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)
24 VDC (-25 ... +30 %); via power jumper contacts
500 mA
450 mA
1700 mA
0 ... +55 °C
61.5 x 71.9 x 100 mm
CE; UL
wago.com/750-330
Item No.
758-879/000-001
Page
470
Download
See Section 2

*All guaranteed specifications are only valid with the WAGO Memory Card listed as an accessory.



Fieldbus Coupler EtherCAT®



Figure: 750-354



Figure: 750-354/000-001

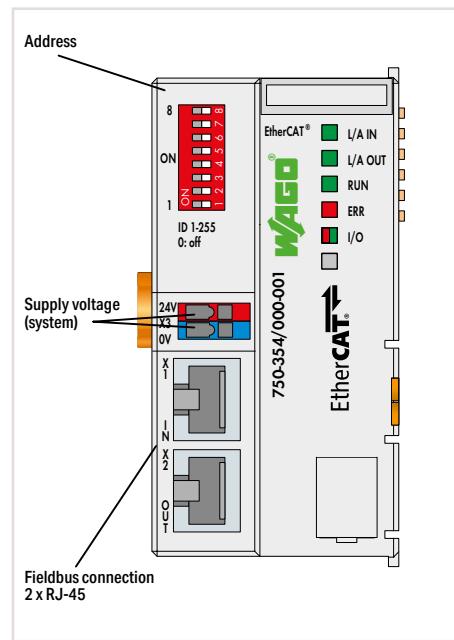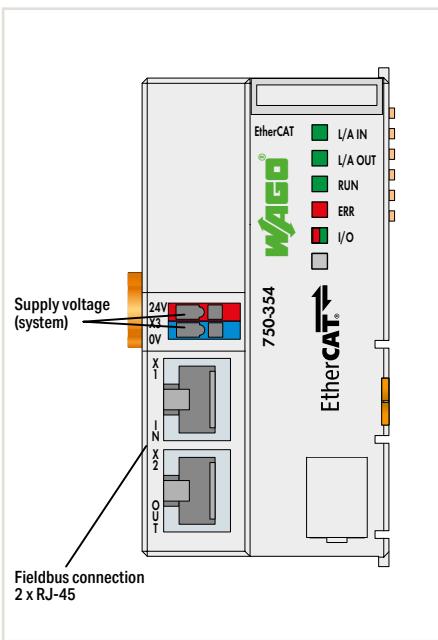

Item Description	Fieldbus Coupler EtherCAT	Fieldbus Coupler EtherCAT
Version	Standard	ID Switch; Diagnostics
Item No.	750-354	750-354/000-001
Order Text	FC EtherCAT	FC EtherCAT; ID Switch; Diagn
Technical Data		
Fieldbus	EtherCAT	EtherCAT
Protocols	EtherCAT (direct mode)	EtherCAT (direct mode)
Connection technology: Fieldbus input/output	2 x RJ-45	2 x RJ-45
Baud rate	100 Mbit/s	100 Mbit/s
Transmission medium	Shielded Twisted Pair S/FTP, F/FTP or SF/FTP; 100 Ω; Cat. 6	Shielded Twisted Pair S/FTP, F/FTP or SF/FTP; 100 Ω; Cat. 6
Number of modules per node (max.)	64	64
Input and output (internal) process image (max.)	1024 bytes	1024 bytes
Supply voltage (system)	24 VDC (-25 ... +30 %); via wiring interface	24 VDC (-25 ... +30 %); via wiring interface
Input current (typ.) at nominal load (24 V)	250 mA	250 mA
Current consumption – system supply (5 V)	300 mA	300 mA
Total current (system supply)	700 mA	700 mA
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	49.5 x 71.9 x 96.8 mm	49.5 x 71.9 x 96.8 mm
Approvals	CE; IC; UL OrdLoc/HazLoc; ATEX/IECEx	CE; IC; UL OrdLoc/HazLoc; ATEX/IECEx Marine
Data sheet and further information, see:	wago.com/750-354	wago.com/750-354/000-001

EtherCAT® is a registered trademark and patented technology of Beckhoff Automation GmbH.


Fieldbus Coupler DeviceNet®



Figure: 750-306



Figure: 750-346

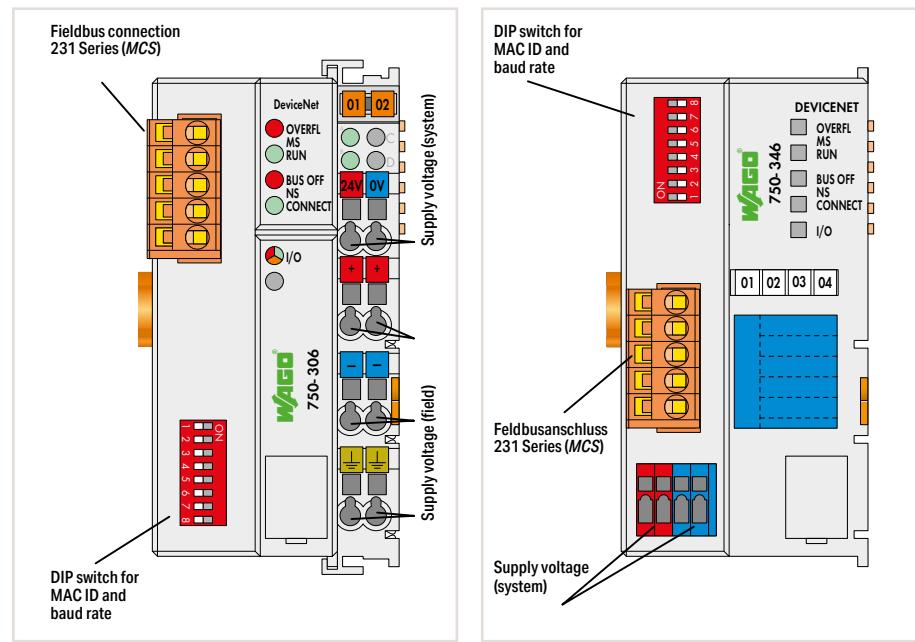

Item Description	Fieldbus Coupler DeviceNet®	Fieldbus Coupler DeviceNet®
Version	Standard	Eco
Item No.	750-306	750-346
Order Text	FC DeviceNet®	FC DeviceNet®, Eco
Technical Data		
Fieldbus	DeviceNet®	DeviceNet®
Connection technology: Fieldbus input/output	5-pole male connector	5-pole male connector
Number of fieldbus nodes on master (max.)	64 with scanner	64 with scanner
Number of I/O points	Approx. 6000 (dependent on master)	Approx. 6000 (dependent on master)
Baud rate	125 kBd; 250 kBd; 500 kBd	125 kBd; 250 kBd; 500 kBd
Transmission medium	Shielded Cu cable; Remote bus cable: 2 x 0.82 mm ² + 2 x 1.7 mm ² ; Drop cable: 2 x 0.2 mm ² + 2 x 0.32 mm ²	Shielded Cu cable; Remote bus cable: 2 x 0.82 mm ² + 2 x 1.7 mm ² ; Drop cable: 2 x 0.2 mm ² + 2 x 0.32 mm ²
Number of modules per node (max.)	64	64
Input and output (internal) process image (max.)	512 bytes	32 bytes
Supply voltage (system)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-15 ... +20 %); via wiring interface
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts	
Input current (typ.) at nominal load (24 V)	500 mA	260 mA
Input current via DeviceNet interface at 11 V	120 mA	120 mA
Current consumption – system supply (5 V)	350 mA	350 mA
Total current (system supply)	1650 mA	650 mA
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	50.5 x 71.1 x 100 mm	49.5 x 71.9 x 96.8 mm
Approvals	CE; UL; Marine; ATEX/IECEx	CE; UL; OrdLoc/HazLoc; ATEX/IECEx
Certification	ODVA	
Data sheet and further information, see:	wago.com/750-306	wago.com/750-346
Accessories	Item No.	Item No.
EDS files	Download: www.wago.com	Download: www.wago.com


Fieldbus Coupler CANopen



Figure: 750-337




Figure: 750-347

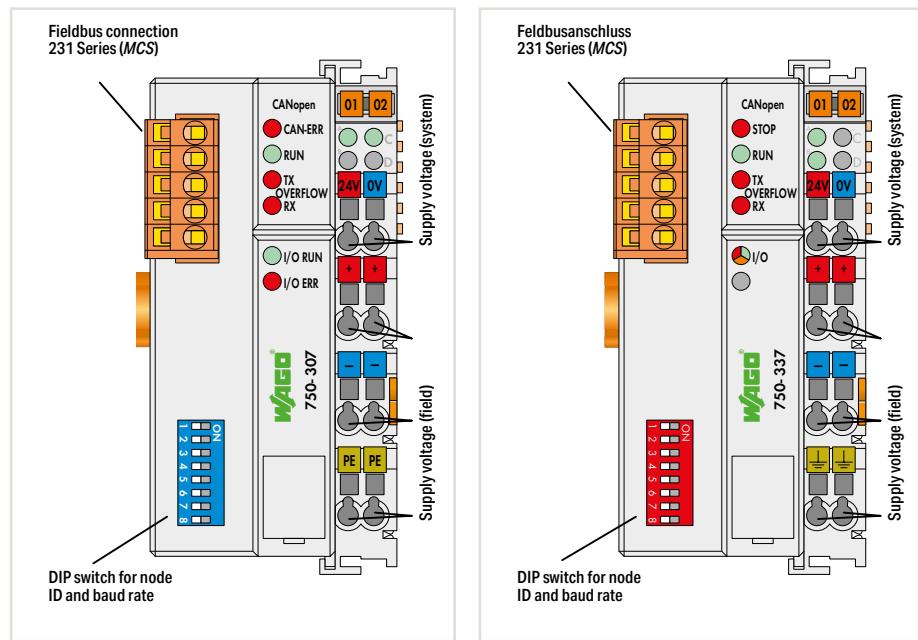

Item Description	Fieldbus Coupler CANopen		Fieldbus Coupler CANopen MCS	
Version	Standard	Extended Temperature	750-337	750-337/025-000
Item No.	750-307		FC CANopen; MCS	FC CANopen; MCS; T
Order Text	FC CANopen			
Technical Data				
Fieldbus	CANopen			
Connection technology: Fieldbus input/output	5-pole male connector			
Number of fieldbus nodes on master (max.)	110			
Bus segment length (max.)	30 ... 1000 m (depends on baud rate/cable)			
Transmission medium	Shielded Cu cable 3 x 0.25 mm ²			
Baud rate	10 kBd ... 1 MBd			
Number of modules per node (max.)	64			
Input and output (internal) process image (max.)	512 bytes			
Number of PDOs	5 Tx / 5 Rx			
Number of SDOs	2 SDO servers			
Communication profile	DS-301 V3.0			
Device profile	DS-401 V1.4			
Additional functions: limit monitoring; flank-triggered PDOs; configurable response in the event of an error				
Supply voltage (system)	24 VDC (-15 ... +20 %); via wiring interface (CAGE CLAMP® connection)			
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts			
Input current (typ.) at nominal load (24 V)	500 mA			
Current consumption – system supply (5 V)	350 mA			
Total current (system supply)	1650 mA			
Surrounding air temperature (operation)	0 ... +55 °C			
Dimensions W x H x D	50.5 x 71.1 x 100 mm			
Approvals	CE; OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-307			
Accessories				
EDS files	Download: www.wago.com			
Item No.				
Item No.				
Download: www.wago.com				

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 517 or www.wago.com

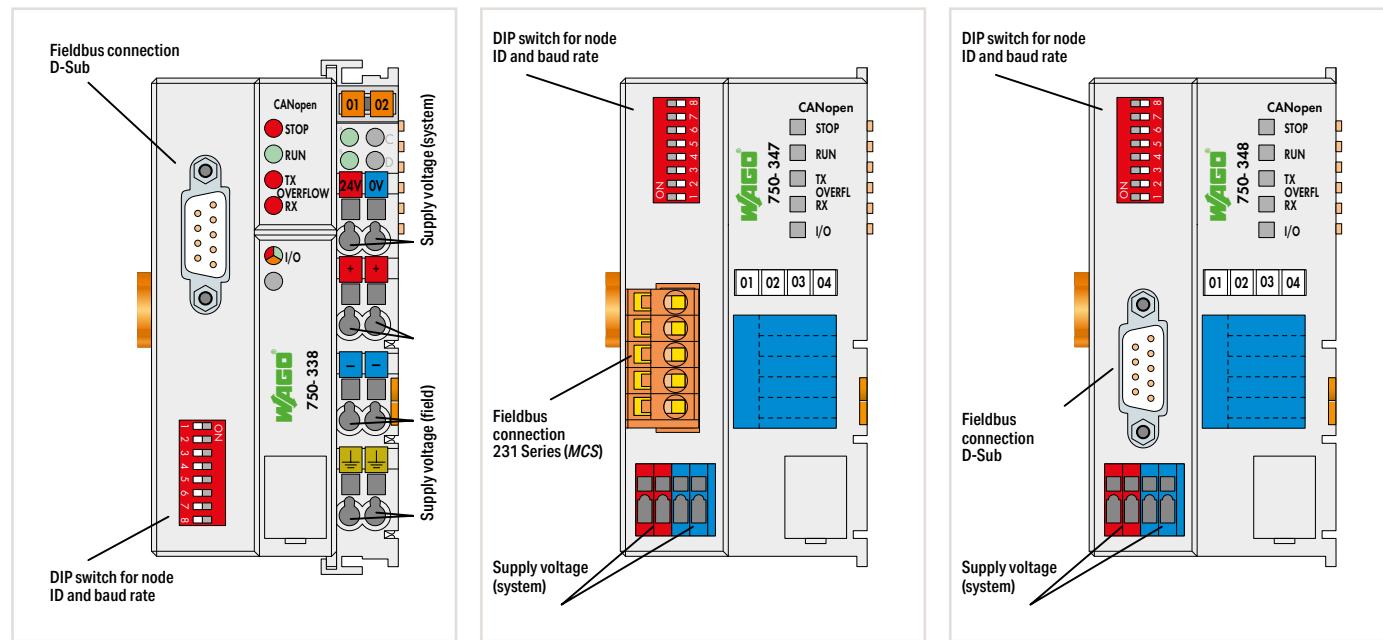**Fieldbus Coupler CANopen D-Sub****Standard****750-338**

FC CANopen; DSub

CANopen
Plug D-Sub 9
110
30 ... 1000 m (depends on baud rate/cable)
Shielded Cu cable 3 x 0.25 mm ²

10 kBd ... 1 MBd

64

512 bytes

32 Tx / 32 Rx

2 SDO servers

DS-301 V4.01

DS-401 V2.0;

Additional functions: limit monitoring; flank-triggered PDOs; configurable response in the event of an error

24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)

24 VDC (-25 ... +30 %); via power jumper contacts

500 mA

350 mA

1650 mA

0 ... +55 °C

50.5 x 71.1 x 100 mm

CE; IP65; Marine; ATEX/IECEx

wago.com/750-338

Item No.Download: www.wago.com**Fieldbus Coupler CANopen MCS****Eco****750-347**

FC CANopen; MCS; Eco

CANopen
5-pole male connector
110
30 ... 1000 m (depends on baud rate/cable)
Shielded Cu cable 3 x 0.25 mm ²

10 kBd ... 1 MBd

64

32 bytes

5 Tx / 5 Rx

1 SDO server

DS-301 V4.01

DS-401 V2.0;

Additional functions: configurable response in the event of an error

24 VDC (-25 ... +30 %); via wiring interface

260 mA

350 mA

650 mA

0 ... +55 °C

49.5 x 71.9 x 96.8 mm

CE; IP65; Marine; ATEX/IECEx

wago.com/750-347

Item No.Download: www.wago.com**Fieldbus Coupler CANopen D-Sub****Eco****750-348**

FC CANopen; DSub; Eco

CANopen
Plug D-Sub 9
110
30 ... 1000 m (depends on baud rate/cable)
Shielded Cu cable 3 x 0.25 mm ²

10 kBd ... 1 MBd

64

32 bytes

5 Tx / 5 Rx

1 SDO server

DS-301 V4.01

DS-401 V2.0;

Additional functions: configurable response in the event of an error

24 VDC (-25 ... +30 %); via wiring interface

260 mA

350 mA

650 mA

0 ... +55 °C


49.5 x 71.9 x 96.8 mm

CE; IP65; Marine; ATEX/IECEx

wago.com/750-348

Item No.Download: www.wago.com

Fieldbus Coupler Sercos®

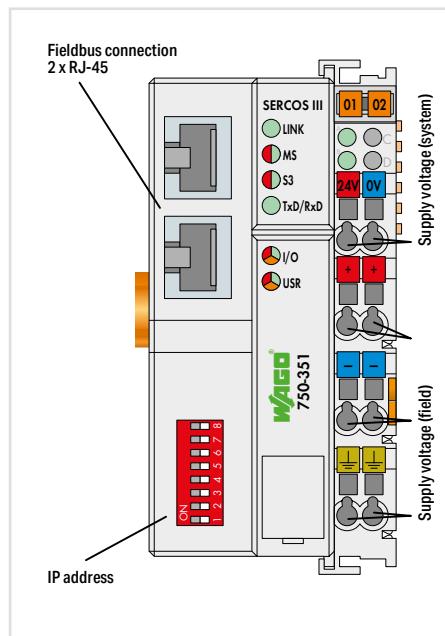

Item Description	Fieldbus Coupler Sercos®	
Item No.	750-351	
Order Text	FC Sercos®	
Technical Data		
Fieldbus	Sercos®	
Protocols	Sercos; FSP-IO; TCP/IP; FTP; HTTP; BootP; DHCP; SNTP	
Supported services	SVC; RTC; CC; IP; Ring break (GDP_Basic; SCP_VarCFG; SCP_Sync)	
Connection technology: Fieldbus input/output	2 x RJ-45	
Sercos® version	V1.1.1	
IO profile	V1.1.1	
Number of couplers (slaves) in Sercos® ring	512	
Baud rate	100 Mbit/s; Full duplex	
Transmission medium	Twisted Pair S-UTP; 100 Ω; Cat. 5	
Number of modules per node (max.)	250	
Input and output (internal) process image (max.)	2 KB (RTC and SVC)	
Supply voltage (system)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts	
Input current (typ.) at nominal load (24 V)	500 mA	
Current consumption – system supply (5 V)	300 mA	
Total current (system supply)	1700 mA	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	50.5 x 71.1 x 100 mm	
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-351	

5.1

- „ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"
- „ Approvals and corresponding ratings, see page 517 or www.wago.com


Fieldbus Coupler Modbus®



Figure: 750-315/300-000



Figure: 750-316/300-000

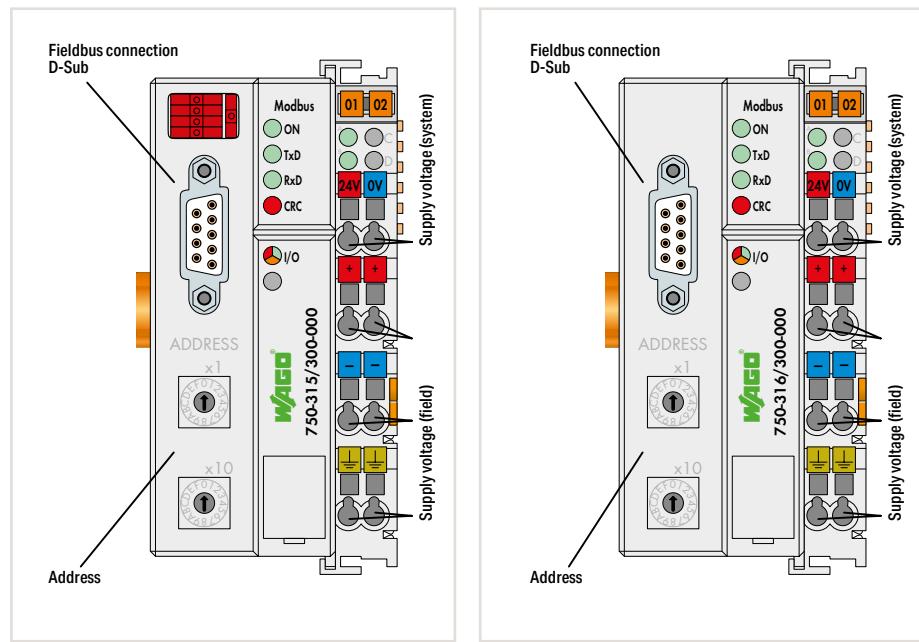

Item Description	Fieldbus Coupler Modbus®	Fieldbus Coupler Modbus®
Version	RS-485; 115.2 kBd	RS-232; 115.2 kBd
Item No.	750-315/300-000	750-316/300-000
Order Text	FC Modbus; RS485; 115.2kBd	FC Modbus; RS232; 115.2kBd

Technical Data	Modbus®	Modbus®
Fieldbus	Socket D-Sub 9	Socket D-Sub 9
Connection technology: Fieldbus input/output	247 with repeater	247 with repeater
Number of fieldbus nodes on master (max.)	RS-485	RS-232
Interface standard	150 Bd ... 115.2 KBd	150 Bd ... 115.2 KBd
Baud rate	Shielded Cu cable 2 (4) x 0.25 mm ²	Shielded Cu cable 2 (4) x 0.25 mm ²
Transmission medium	64	64
Number of modules per node (max.)	512 bytes	512 bytes
Input and output (internal) process image (max.)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)
Supply voltage (system)	24 VDC (-25 ... +30 %); via power jumper contacts	24 VDC (-25 ... +30 %); via power jumper contacts
Supply voltage (field)	500 mA	500 mA
Input current (typ.) at nominal load (24 V)	350 mA	350 mA
Current consumption – system supply (5 V)	1650 mA	1650 mA
Total current (system supply)	0 ... +55 °C	0 ... +55 °C
Surrounding air temperature (operation)	50.5 x 71.1 x 100 mm	50.5 x 71.1 x 100 mm
Dimensions W x H x D	CE; IEC 60945; Marine; OrdLoc/HazLoc; ATEX/IECEx	CE; IEC 60945; Marine; OrdLoc/HazLoc; ATEX/IECEx
Approvals	wago.com/750-315/300-000	wago.com/750-316/300-000
Data sheet and further information, see:		



Fieldbus Coupler INTERBUS



Figure: 750-304



Figure: 750-344

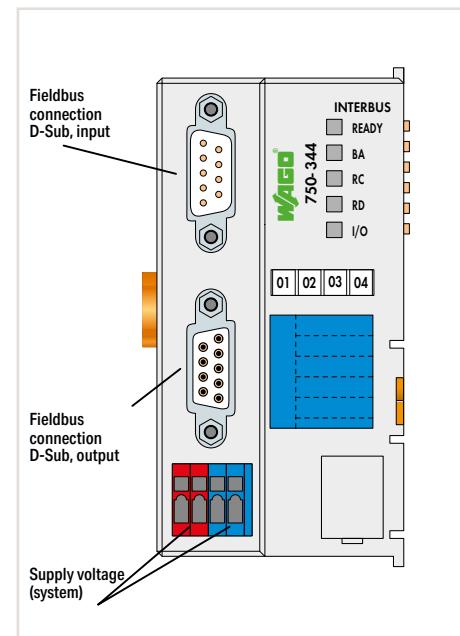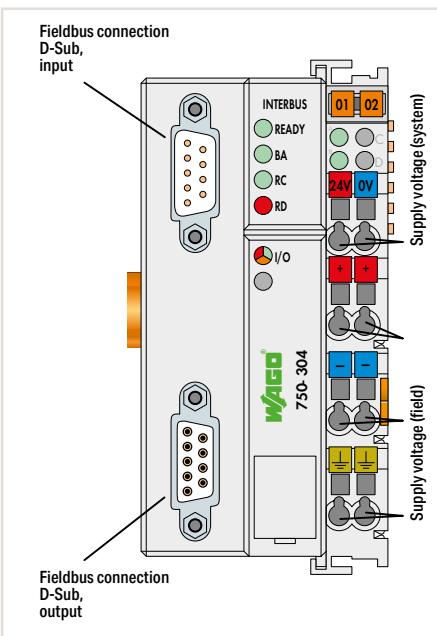

Item Description	Fieldbus Coupler INTERBUS	Fieldbus Coupler INTERBUS; 500 kBit/s; Eco
Item No.	750-304	750-344
Order Text	FC INTERBUS	FC INTERBUS; 500kbit/s; Eco
Technical Data		
Fieldbus	INTERBUS	INTERBUS
Connection technology: Fieldbus input/output	D-Sub 9 plug / D-Sub 9 socket	D-Sub 9 plug / D-Sub 9 socket
Number of fieldbus nodes on master (max.)	256	256
Bus segment length (max.)	400 m	400 m
Transmission medium	Copper cable	Copper cable
Baud rate	500 kBd	500 kBd
Number of modules per node (max.)	64	64
Input and output (internal) process image (max.)	64 bytes	20 bytes
Supply voltage (system)	24 VDC (-15 ... +20 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-15 ... +20 %); via power jumper contacts
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts	24 VDC (-15 ... +20 %); via wiring interface
Input current (typ.) at nominal load (24 V)	500 mA	260 mA
Current consumption – system supply (5 V)	300 mA	350 mA
Total current (system supply)	1700 mA	650 mA
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	50.5 x 71.1 x 100 mm	49.5 x 71.9 x 96.8 mm
Approvals	CE; UL; CSA; OrdLoc/HazLoc; ATEX/IECEx	CE; UL; CSA; OrdLoc/HazLoc; ATEX/IECEx
Standard	EN 50254	EN 50254
Certification	INTERBUS CLUB	
Data sheet and further information, see:	wago.com/750-304	wago.com/750-344
Accessories		
INTERBUS files	Item No. Download: www.wago.com	Item No. Download: www.wago.com

5.1

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 517 or www.wago.com


Fieldbus Coupler CC-Link



Figure: 750-310



Figure: 750-325

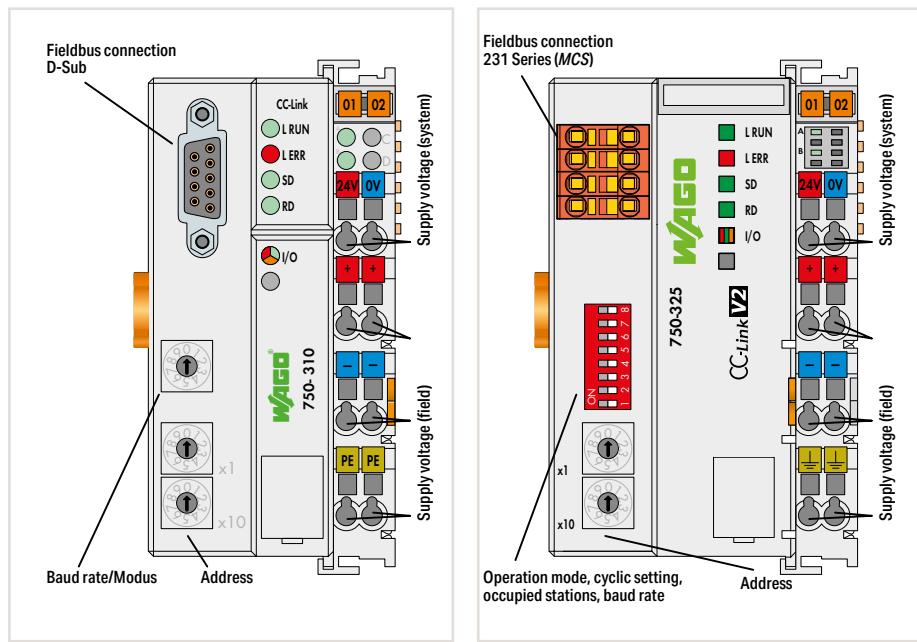

Item Description	Fieldbus Coupler CC-Link 750-310	Fieldbus Coupler CC-Link 750-325
Item No.	FC CC-Link	FC CC-Link
Order Text		
Technical Data		
Fieldbus	CC-Link	CC-Link
Connection technology: Fieldbus input/output	Socket D-Sub 9	MCS pluggable connectors (included)
Number of fieldbus nodes on master (max.)	64	64
Baud rate	156 kBd ... 10 MBd	156 kBd ... 10 MBd
Transmission medium	Shielded Cu cable 2/3 x 0.5 mm ²	Shielded Cu cable 2/3 x 0.5 mm ²
Number of modules per node (max.)	64	64
Operating mode		CC-Link V2.0 (default setting)/V1.1
Assigned station addresses	4/1 ... 4	1 ... 4 / 4 (default setting)
Advanced cycle setting		1, 2, 4 (default setting); 8 cycles
Input (internal) process image (max.)	14-byte digital; 2-byte system; 32-byte analog	RY (digital inputs): V1.1: 16, 48, 80, 112 bits; V2.0: 16, 48, 80, 112 bits (1 cycle); V2.0: 16, 80, 144, 208 bits (2 cycles); V2.0: 48, 176, 304, 432 bits (4 cycles); V2.0: 112, 368, 624, 880 bits (8 cycles) and for each 16-bit system area; RWr (analog inputs): V1.1: 4, 8, 12, 16 words (16 bits); V2.0: 4, 8, 12, 16 words (1 cycle); V2.0: 8, 16, 24, 32 words (2 cycles); V2.0: 16, 32, 48, 64 words (4 cycles); V2.0: 32, 64, 96, 128 words (8 cycles)
Output (internal) process image (max.)	14-byte digital; 2-byte system; 32-byte analog	RWw (analog outputs): V1.1: 4, 8, 12, 16 words (16 bits); V2.0: 4, 8, 12, 16 words (1 cycle); V2.0: 8, 16, 24, 32 words (2 cycles); V2.0: 16, 32, 48, 64 words (4 cycles); V2.0: 32, 64, 96, 128 words (8 cycles)
Supply voltage (system)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	RY (digital outputs): V1.1: 16, 48, 80, 112 bits; V2.0: 16, 48, 80, 112 bits (1 cycle); V2.0: 16, 80, 144, 208 bits (2 cycles); V2.0: 48, 176, 304, 432 bits (4 cycles); V2.0: 112, 368, 624, 880 bits (8 cycles) and for each 16-bit system area
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts	RWw (analog outputs): V1.1: 4, 8, 12, 16 words (16 bits); V2.0: 4, 8, 12, 16 words (1 cycle); V2.0: 8, 16, 24, 32 words (2 cycles); V2.0: 16, 32, 48, 64 words (4 cycles); V2.0: 32, 64, 96, 128 words (8 cycles)
Input current (typ.) at nominal load (24 V)	500 mA	24 VDC (-25 ... +30 %); via power jumper contacts
Current consumption – system supply (5 V)	300 mA	500 mA
Total current (system supply)	1700 mA	200 mA
Surrounding air temperature (operation)	0 ... +55 °C	1800 mA
Dimensions W x H x D	50.5 x 71.1 x 100 mm	0 ... +55 °C
Approvals	CE; OrdLoc/HazLoc; ATEX/IECEx	61.5 x 71.9 x 100 mm
Data sheet and further information, see:	wago.com/750-310	wago.com/750-325

Digital Input Modules




Housing design (750 Series)

Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 67.8 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 60.6 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

Housing design (753 Series)

Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 69 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 61.8 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	9 ... 10 mm / 0.37 inch

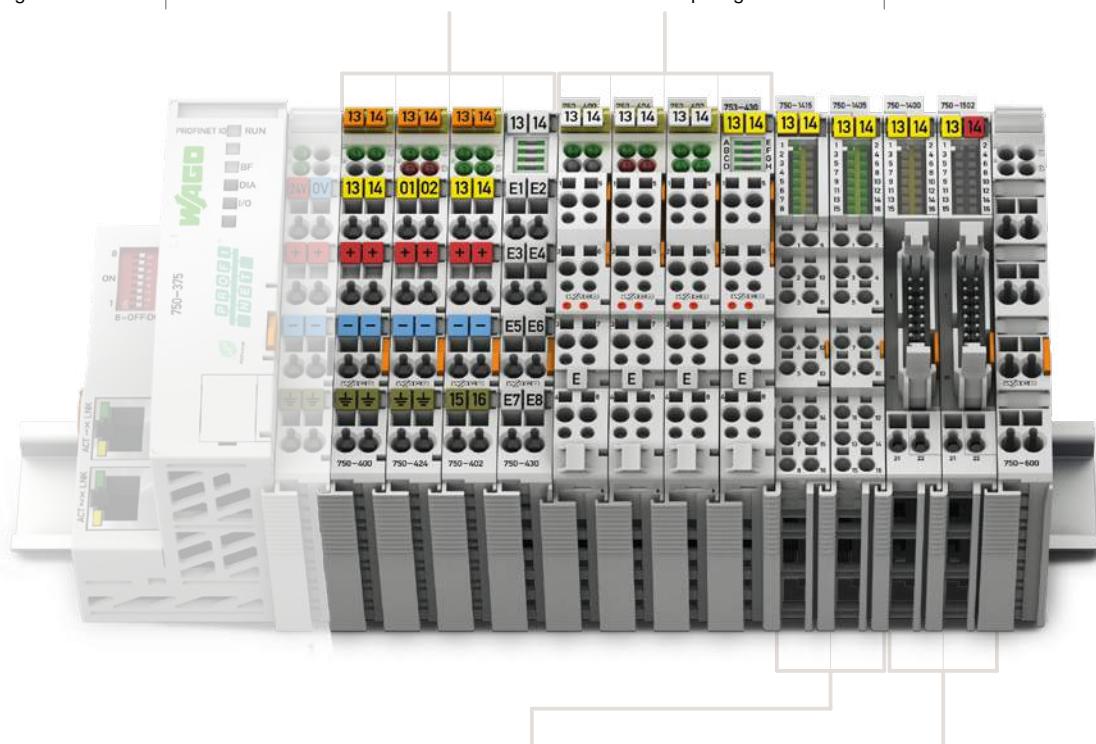


Housing design (750 Series), with Push-in CAGE CLAMP® connections (up to 16 connection points)

Dimensions W x H x D	12 x 69 x 100 mm
Height from upper-edge of DIN-rail	61.8 mm
Connection technology	Push-in CAGE CLAMP®
Conductor cross section	Solid: 0.08 ... 1.5 mm² / 28 ... 16 AWG Fine-stranded: 0.25 ... 1.5 mm² / 22 ... 16 AWG
Strip length	8 ... 9 mm / 0.33 inch

Housing design (750 Series), with ribbon cable connection

Dimensions W x H x D	12 x 74.1 x 100 mm
Height from upper-edge of DIN-rail	66.9 mm
Connection technology	20-pole male connector + 2 x CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

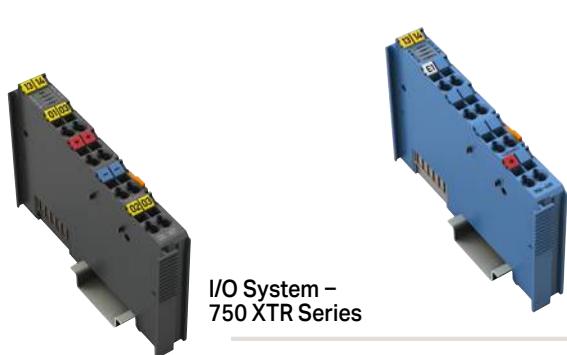

I/O System –
750 XTR Series



I/O System – 750 and 753 Series, Digital Input Modules

Contents

Function	2-Channel DI	4-Channel DI	8-Channel DI	16-Channel DI	8-Channel DIO	Description	Item Number			Page
							Standard	Extended Temperature	Pluggable	
5 VDC	<input checked="" type="checkbox"/>					4-Channel Digital Input; 5 VDC; 0.2 ms	750-414			164
5/12 VDC		<input checked="" type="checkbox"/>				8-Channel Digital Input; 5/12 VDC; 0.2 ms			753-434	164
24 VDC	<input checked="" type="checkbox"/>					2-Channel Digital Input; 24 VDC; 3 ms	750-400	750-400/025-000	753-400	165
	<input checked="" type="checkbox"/>					2-Channel Digital Input; 24 VDC; 3 ms; Acknowledgement; Diagnostics	750-418		753-418	165
	<input checked="" type="checkbox"/>					2-Channel Digital Input; 24 VDC; 3 ms; Diagnostics	750-421		753-421	166
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VDC; 3 ms	750-402	750-402/025-000	753-402	166
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VDC; 3 ms; 2-wire connection	750-432		753-432	167
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VDC; 3 ms; 3-wire connection	750-1420			167
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			8-Channel Digital Input; 24 VDC; 3 ms	750-430*	750-430/025-000	753-430	168
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			8-Channel Digital Input; 24 VDC; 3 ms; 2-wire connection	750-1415*			168
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		16-Channel Digital Input; 24 VDC; 3 ms; Ribbon cable	750-1400			169
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		16-Channel Digital Input; 24 VDC; 3 ms	750-1405*			169
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		8-Channel Digital Input/Output; 24 VDC; 0.5 A; Ribbon cable	750-1502			170
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		8-Channel Digital Input/Output; 24 VDC; 0.5 A	750-1506			170
	<input checked="" type="checkbox"/>					2-Channel Digital Input; 24 VDC; 0.2 ms	750-401		753-401	171
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VDC; 0.2 ms	750-403		753-403	171
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			4-Channel Digital Input; 24 VDC; 0.2 ms; 2-wire connection	750-433		753-433	172
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			4-Channel Digital Input; 24 VDC; 0.2 ms; 3-wire connection	750-1421			172
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		8-Channel Digital Input; 24 VDC; 0.2 ms	750-431*		753-431	173
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		8-Channel Digital Input; 24 VDC; 0.2 ms; 2-wire connection	750-1416*			173
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		16-Channel Digital Input; 24 VDC; 0.2 ms	750-1406			173
3 ms; High-side switching	<input checked="" type="checkbox"/>					4-Channel Digital Input; 24 VDC; 3 ms; Low-side switching	750-408	750-408/025-000	753-408	174
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VDC; 3 ms; Low-side switching; 3-wire connection	750-1422			174
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			8-Channel Digital Input; 24 VDC; 3 ms; Low-side switching	750-436		753-436	175
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			8-Channel Digital Input; 24 VDC; 3 ms; Low-side switching; 2-wire connection	750-1417			175
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		16-Channel Digital Input; 24 VDC; 3 ms; Low-side switching; Ribbon cable	750-1402			176
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		16-Channel Digital Input; 24 VDC; 3 ms; Low-side switching	750-1407			176
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		4-Channel Digital Input; 24 VDC; 0.2 ms; Low-side switching	750-409		753-409	177
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		4-Channel Digital Input; 24 VDC; 0.2 ms; Low-side switching; 3-wire connection	750-1423			177
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		8-Channel Digital Input; 24 VDC; 0.2 ms; Low-side switching	750-437		753-437	178
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		8-Channel Digital Input; 24 VDC; 0.2 ms; Low-side switching; 2-wire connection	750-1418			178
0.2 ms; Low-side switching	<input checked="" type="checkbox"/>					2-Channel Digital Input; 24 VDC; 3 ms; Proximity sensor	750-410		753-410	179
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				2-Channel Digital Input; 24 VDC; 0.2 ms; Proximity sensor	750-411		753-411	179
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				2-Channel Digital Input; NAMUR	750-425		753-425	180
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				2-Channel Digital Input; Intruder detection	750-424		753-424	181
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VDC; Pulse extension	750-422		753-422	182
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VAC/DC; 20 ms	750-415		753-415	183
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VAC/DC; 50 ms	750-423		753-423	183
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				4-Channel Digital Input; 24 VAC/DC; 20 ms	750-428		753-428	184
48 VDC	<input checked="" type="checkbox"/>					2-Channel Digital Input; 48 VDC; 3 ms	750-412		753-412	185
60 VDC	<input checked="" type="checkbox"/>					2-Channel Digital Input; 60 VDC; 3 ms	*		753-429	186
110 VDC	<input checked="" type="checkbox"/>					2-Channel Digital Input; 110 VDC; High-side/low-side switching	750-427*		753-427	187
220 VDC	<input checked="" type="checkbox"/>					2-Channel Digital Input; 220 VDC	750-407*			187
120 VAC	<input checked="" type="checkbox"/>					2-Channel Digital Input; 120 VAC	750-406		753-406	188
120/230 VAC	<input checked="" type="checkbox"/>					4-Channel Digital Input; 120/230 VAC			753-440	189
230 VAC	<input checked="" type="checkbox"/>					2-Channel Digital Input; 230 VAC	750-405		753-405	188
PTC		<input checked="" type="checkbox"/>				8-Channel Digital Input; PTC	750-1425			189
Functional Safety							See Section 5.8			
Ex i							See Section 5.9			
*This module is also available as a 750 XTR Series variant.							See Section 6			

Digital Input; 5 (12) VDC; 0.2 ms



Figure: 750-414


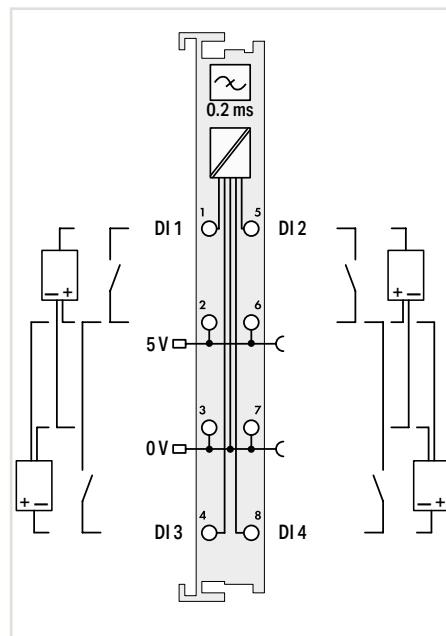


Figure: 753-434

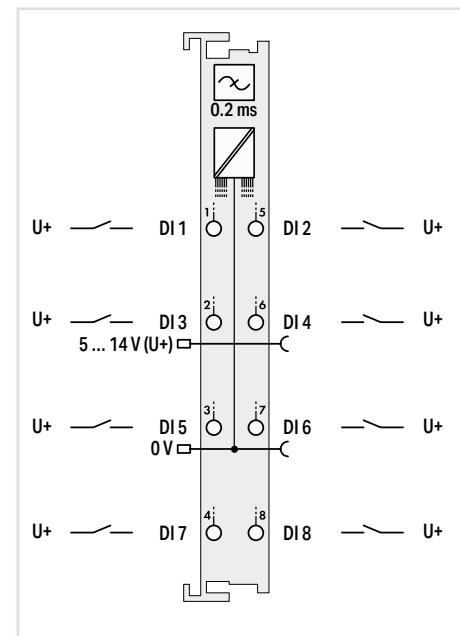

Item Description	4-Channel Digital Input; 5 VDC; 0.2 ms	8-Channel Digital Input; 5/12 VDC; 0.2 ms
Version	Standard	Pluggable (delivery without connector)
Item No.	750-414	753-434
Order Text	4DI; 5 VDC; 0.2ms	8DI; 5/12 VDC; 0.2ms
Technical Data		
Pluggable connector		●
Number of digital inputs	4	8
Signal type	5 VDC	5 ... 14 VDC
Voltage range for signal (0)	0 ... 0.8 VDC	-3 VDC ... 0.2 x U _V
Voltage range for signal (1)	2.4 ... 5 VDC	0.5 U _V ... 1.1 U _V DC
Sensor connection	2 x (2-wire; 3-wire)*	1-wire
Input characteristic	High-side switching	High-side switching
Input filter (digital)	0.2 ms	0.2 ms
Input current per channel for signal (1) typ.	0.05 mA	0.06 mA
Supply voltage (sensor)	5 VDC	
Supply voltage (field)	5 VDC; via power jumper contacts (power supply via blade contact; transmission via spring contact)	5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	5 mA	4 mA
Data width (internal)	4 bits	8 bits
Isolation	500 V system/field	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69 x 100 mm
Approvals	CE; UL; CSA; OrdLoc/HazLoc	CE; UL; CSA; Marine; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-414	wago.com/753-434
Accessories		
Pluggable connector		
Coding keys		
Item No.		
753-110		
753-150		

Notice:

An additional supply module must be added for operation with 5 VDC!

*A suitable field side connection module (e.g., 750-614) must also be used to connect other sensors.

Notice:

An additional supply module must be added for 5–14 VDC supply!

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 518 or www.wago.com



Digital Input; 24 VDC; 3 ms



Figure: 750-400



Figure: 753-400

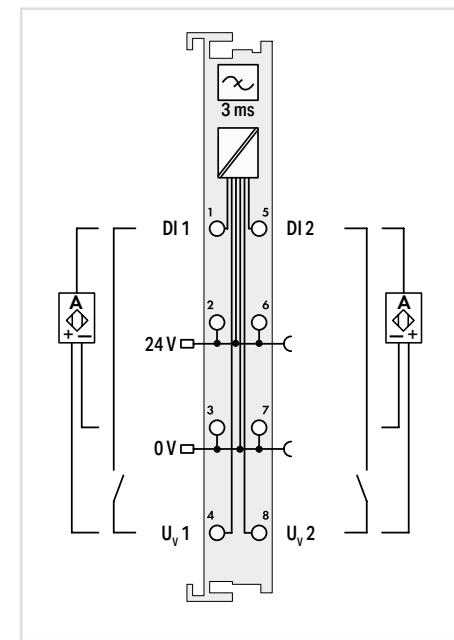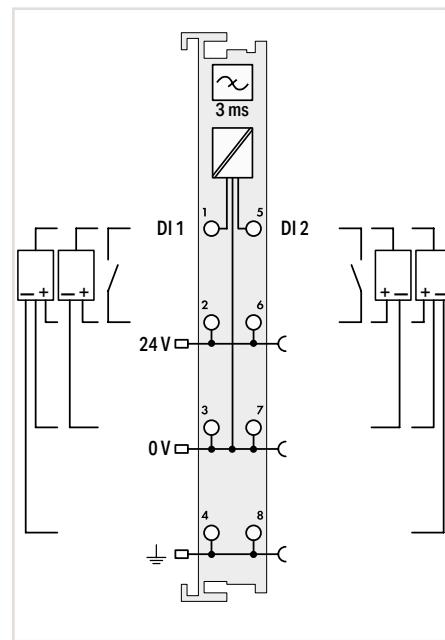

Item Description	2-Channel Digital Input; 24 VDC; 3 ms			2-Channel Digital Input; 24 VDC; 3 ms; Acknowledgement; Diagnostics				
Version	Standard	Extended temperature	Pluggable (delivery without connector)	Standard	Pluggable (delivery without connector)			
Item No.	750-400	750-400/025-000	753-400	750-418	753-418			
Order Text	2DI; 24 VDC; 3ms	2DI; 24 VDC; 3ms; T	2DI; 24 VDC; 3ms	2DI; 24 VDC; 3ms; Acknol; Diagn	2DI; 24 VDC; 3ms; Acknol; Diagn			
Technical Data								
Pluggable connector			•		•			
Number of digital inputs	2		2		2			
Signal type	24 VDC		24 VDC		24 VDC			
Voltage range for signal (0)	-3 ... +5 VDC		-3 ... +5 VDC		-3 ... +5 VDC			
Voltage range for signal (1)	15 ... 30 VDC		15 ... 30 VDC		15 ... 30 VDC			
Sensor connection	2-wire; 3-wire; 4-wire		2-wire; 3-wire		High-side switching			
Input characteristic	High-side switching		High-side switching		High-side switching			
Input filter (digital)	3 ms		3 ms		3 ms			
Input current per channel for signal (1) typ.	4.5 mA		4.5 mA		3.7 mA			
Supply voltage (sensor)	24 VDC		24 VDC		24 VDC; short-circuit-protected; isolated channels			
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			
Current consumption – system supply (5 V)	3.7 mA		3.7 mA		12 mA			
Data width (internal)	2 bits		2 bits		4 bits			
Diagnostics					Short circuit; active acknowledgement after error rectified			
Isolation	500 V system/field			500 V system/field				
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C	0 ... +55 °C				
Dimensions W x H x D	12 x 69.8 x 100 mm			12 x 69.8 x 100 mm				
Approvals	CE; UL; Marine; ATEX/IECEx			CE; UL; Marine; ATEX/IECEx				
Data sheet and further information, see:	wago.com/750-400		wago.com/753-400		wago.com/750-418			
Accessories								
Pluggable connector			Item No.		Item No.			
Coding keys			753-110		753-110			
			753-150		753-150			



Digital Input; 24 VDC; 3 ms



Figure: 750-421



Figure: 750-402

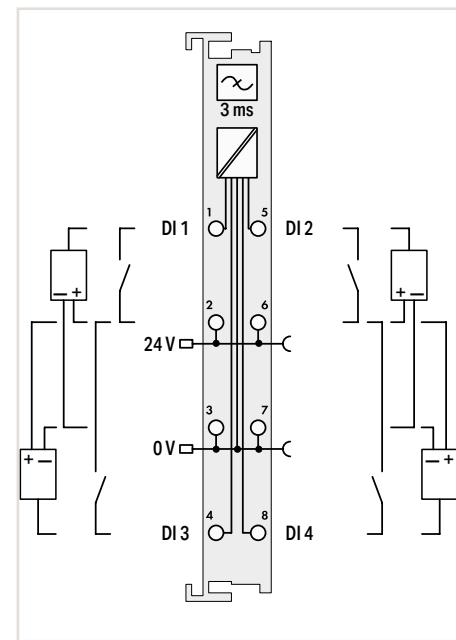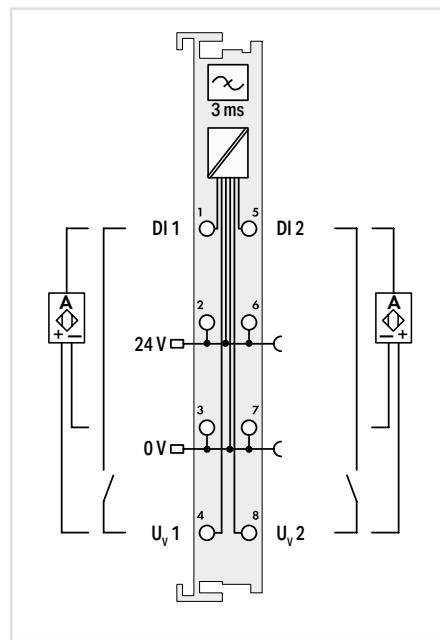

Item Description		2-Channel Digital Input; 24 VDC; 3 ms; Diagnostics		4-Channel Digital Input; 24 VDC; 3 ms		
Version		Standard	Pluggable (delivery without connector)	Standard	Extended temperature	Pluggable (delivery without connector)
Item No.	750-421	753-421		750-402	750-402/025-000	753-402
Order Text	2DI; 24 VDC; 3ms; Diagn	2DI; 24 VDC; 3ms; Diagn		4DI; 24 VDC; 3ms	4DI; 24 VDC; 3ms; T	4DI; 24 VDC; 3ms
Technical Data						
Pluggable connector			•			•
Number of digital inputs		2			4	
Signal type	24 VDC			24 VDC		
Voltage range for signal (0)	-3 ... +5 VDC			-3 ... +5 VDC		
Voltage range for signal (1)	15 ... 30 VDC			15 ... 30 VDC		
Sensor connection	2-wire; 3-wire			2 x (2-wire; 3-wire)*		
Input characteristic	High-side switching			High-side switching		
Input filter (digital)	3 ms			3 ms		
Input current per channel for signal (1) typ.	3.7 mA			4.5 mA		
Supply voltage (sensor)	24 VDC; short-circuit-protected; isolated channels			24 VDC		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption – system supply (5 V)	12 mA			7.5 mA		
Data width (internal)	4 bits			4 bits		
Diagnostics	Short circuit; automatic acknowledgement after error rectified					
Isolation	500 V system/field			500 V system/field		
Surrounding air temperature (operation)	0 ... +55 °C			0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm			12 x 69.8 x 100 mm		
Approvals	CE; UL Marine; CSA OrdLoc/HazLoc; ATEX/IECEx			CE; UL Marine; CSA OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-421	wago.com/753-421		wago.com/750-402	wago.com/ 753-402	
Accessories		Item No.			Item No.	
Pluggable connector		753-110			753-110	
Coding keys		753-150			753-150	

“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 518 or www.wago.com

*A suitable field side connection module (e.g.,
750-614) must also be used to connect other
sensors.



Digital Input; 24 VDC; 3 ms



Figure: 750-432



Figure: 750-1420

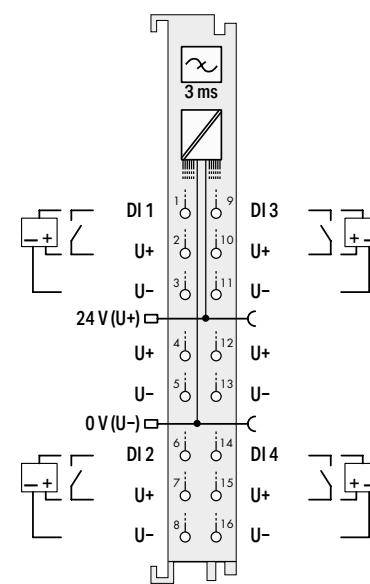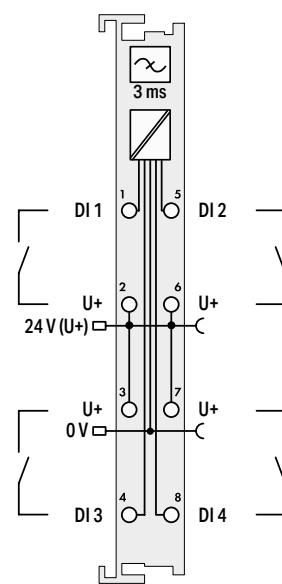

Item Description	4-Channel Digital Input; 24 VDC; 3 ms; 2-wire connection	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-432	753-432
Order Text	4DI; 24 VDC; 3ms; 2-wire	4DI; 24 VDC; 3ms; 2-wire

Technical Data

Pluggable connector	•	
Number of digital inputs	4	4
Signal type	24 VDC	24 VDC
Voltage range for signal (0)	-3 ... +5 VDC	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC	11 ... 30 VDC
Sensor connection	2-wire	3-wire
Input characteristic	High-side switching	High-side switching
Input filter (digital)	3 ms	3 ms
Input current per channel for signal (1) typ.	4.5 mA	4.5 mA
Supply voltage (sensor)	24 VDC	24 VDC
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	5.5 mA	4 mA
Data width (internal)	4 bits	4 bits
Isolation	500 V system/field	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69 x 100 mm
Approvals	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-432	wago.com/753-432

Accessories	Item No.
Pluggable connector	753-110
Coding keys	753-150



Digital Input; 24 VDC; 3 ms



Figure: 750-430



Figure: 750-1415

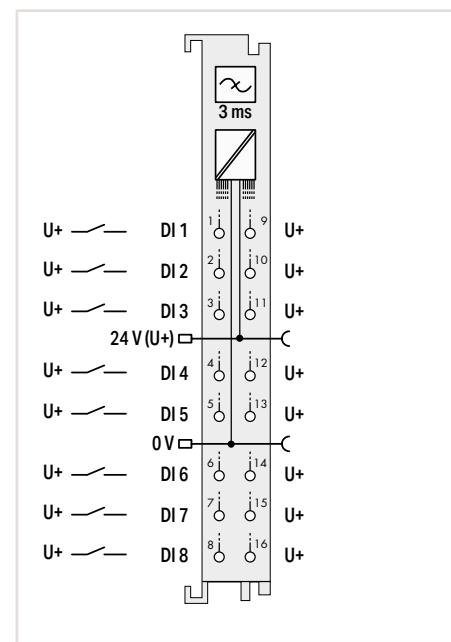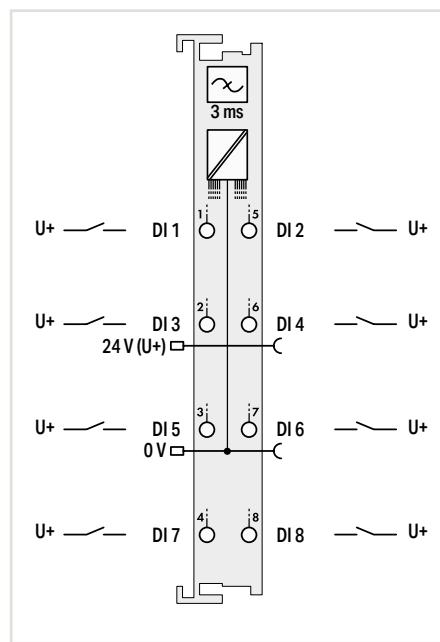

Item Description			8-Channel Digital Input; 24 VDC; 3 ms			8-Channel Digital Input; 24 VDC; 3 ms; 2-wire connection			
Version	Standard	Extended temperature	Pluggable (delivery without connector)	Standard with 16 connectors					
Item No.	750-430	750-430/025-000	753-430	750-1415			8DI; 24 VDC; 3ms; 2-wire		
Order Text	8DI; 24 VDC; 3ms	8DI; 24 VDC; 3ms; T	8DI; 24 VDC; 3ms						
Technical Data									
Pluggable connector			•						
Number of digital inputs	8			8			8		
Signal type	24 VDC			24 VDC			24 VDC		
Voltage range for signal (0)	-3 ... +5 VDC			-3 ... +5 VDC			-3 ... +5 VDC		
Voltage range for signal (1)	15 ... 30 VDC			11 ... 30 VDC			11 ... 30 VDC		
Sensor connection	1-wire			2-wire			2-wire		
Input characteristic	High-side switching			High-side switching			High-side switching		
Input filter (digital)	3 ms			3 ms			3 ms		
Input current per channel for signal (1) typ.	2.8 mA			4.5 mA			4.5 mA		
Supply voltage (sensor)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			24 VDC		
Supply voltage (field)	17 mA			6 mA			6 mA		
Current consumption – system supply (5 V)	8 bits			8 bits			8 bits		
Data width (internal)	500 V system/field			500 V system/field			500 V system/field		
Isolation	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C	0 ... +55 °C			0 ... +55 °C		
Surrounding air temperature (operation)	12 x 67.8 x 100 mm			12 x 69 x 100 mm			12 x 69 x 100 mm		
Dimensions W x H x D									
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx			Marine; OrdLoc/HazLoc; ATEX/IECEx			Marine; OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-430			wago.com/753-430			wago.com/750-1415		
Accessories				Item No.					
Pluggable connector				753-110					
Coding keys				753-150					

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 518 or www.wago.com



Digital Input; 24 VDC; 3 ms



Figure: 750-1400



Figure: 750-1405

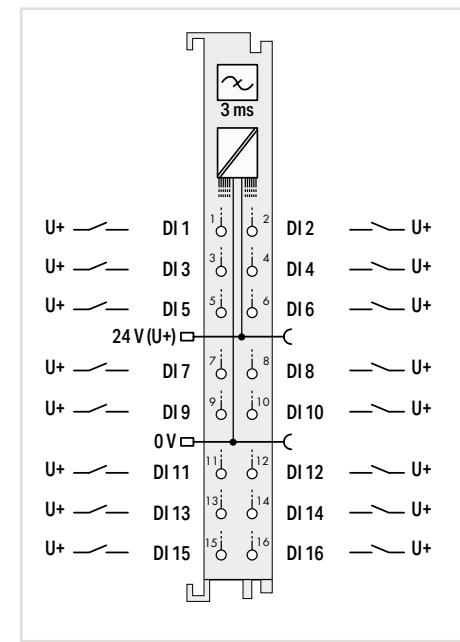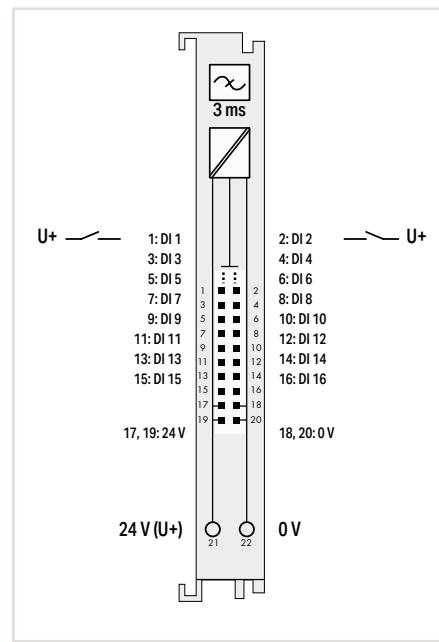

Item Description	16-Channel Digital Input; 24 VDC; 3 ms; Ribbon cable	
Version	Standard with ribbon cable connector	16-Channel Digital Input; 24 VDC; 3 ms
Item No.	750-1400	Standard with 16 connectors
Order Text	16DI; 24 VDC; 3ms; Ribbon Cable	750-1405
Technical Data		
Number of digital inputs	16	16
Signal type	24 VDC	24 VDC
Voltage range for signal (0)	-3 ... +5 VDC	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC	15 ... 30 VDC
Sensor connection	1-wire	1-wire
Input characteristic	High-side switching	High-side switching
Input filter (digital)	3 ms	3 ms
Input current per channel for signal (1) typ.	2.3 mA	2.3 mA
Supply voltage (sensor)	24 VDC	
Supply voltage (field)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	25 mA	25 mA
Data width (internal)	16 bits	16 bits
Isolation	500 V system/field	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 74.1 x 100 mm	12 x 69 x 100 mm
Approvals	CE; IEC Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-1400	
Accessories	Item No. See Section 10	



Digital Input/Output; 24 VDC



Figure: 750-1502



Figure: 750-1506

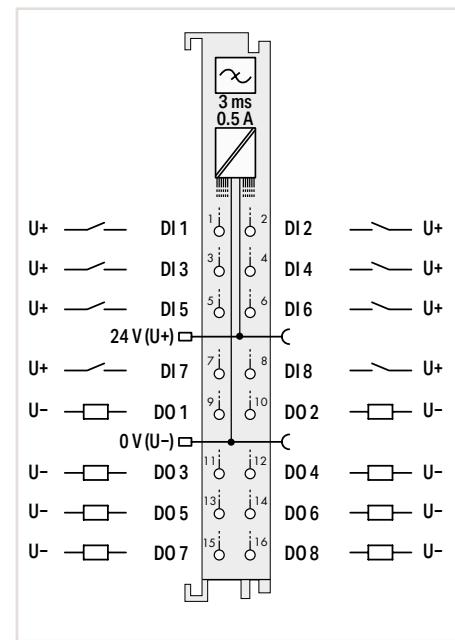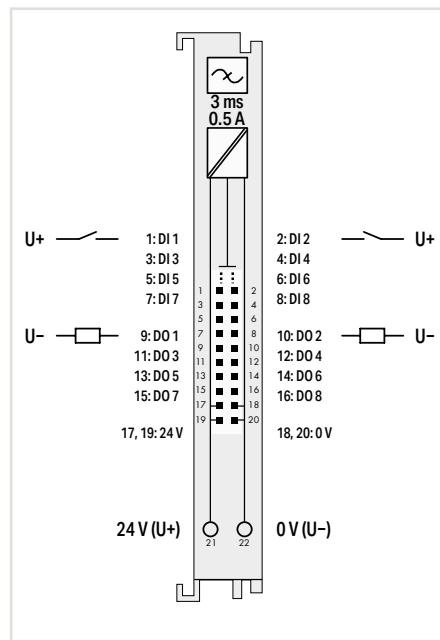

Item Description	8-Channel Digital Input/Output; 24 VDC; 0.5 A; Ribbon cable	8-Channel Digital Input/Output; 24 VDC; 0.5 A
Version	Standard with ribbon cable connector	Standard with 16 connectors
Item No.	750-1502	750-1506
Order Text	8DIO; 24 VDC; 0.5A; Ribbon Cable	8DIO; 24 VDC; 0.5A
Technical Data		
Number of digital inputs	8	8
Signal type	24 VDC	24 VDC
Voltage range for signal (0)	-3 ... +5 VDC	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC	15 ... 30 VDC
Sensor connection	1-wire	1-wire
Input characteristic	High-side switching	High-side switching
Input filter (digital)	3 ms	3 ms
Input current per channel for signal (1) typ.	2.4 mA	2.4 mA
Number of digital outputs	8	8
Output characteristic	High-side switching	High-side switching
Output current per channel	0.5 A; short-circuit-protected	0.5 A; short-circuit-protected
Load type	Resistive; inductive; lamp load	Resistive; inductive; lamp load
Actuator connection	1-wire	1-wire
Switching frequency (max.)	1 kHz	1 kHz
Current consumption, field supply (module with no external load)	16 mA	16 mA
Supply voltage (field)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	30 mA	30 mA
Data width (internal)	8-bit input and 8-bit output	8-bit input and 8-bit output
Isolation	500 V system/field	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 74.1 x 100 mm	12 x 69 x 100 mm
Approvals	CE; IEC61800-5-2; Marine; ATEX/IECEx	CE; IEC61800-5-2; Marine; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-1502	wago.com/750-1506
Accessories	Item No.	
Interface modules for system wiring and interface cable	See Section 10	

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 518 or www.wago.com


Digital Input; 24 VDC; 0.2 ms



Figure: 750-401



Figure: 753-401

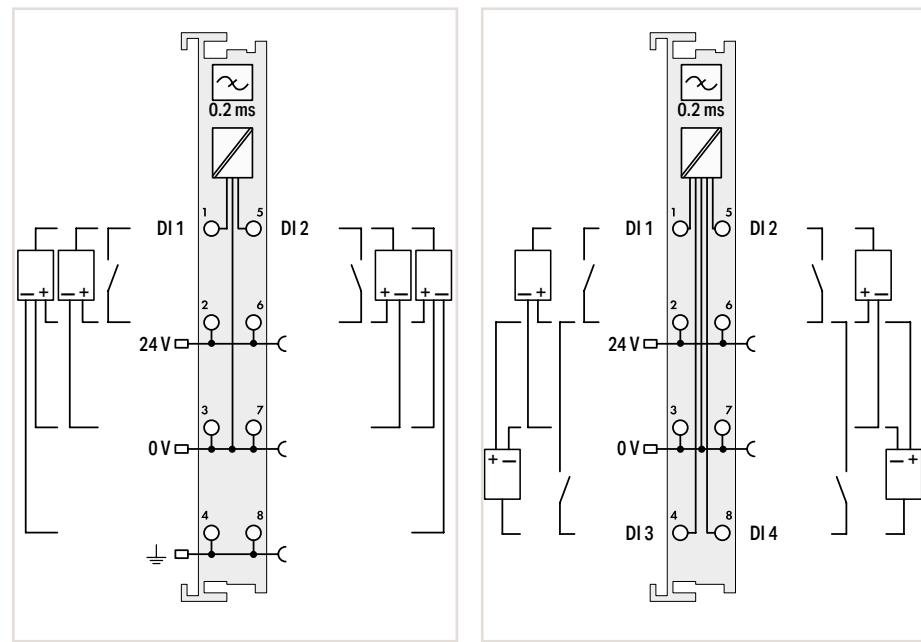

Item Description	2-Channel Digital Input; 24 VDC; 0.2 ms		4-Channel Digital Input; 24 VDC; 0.2 ms	
Version	Standard	Pluggable (delivery without connector)	Standard	Pluggable (delivery without connector)
Item No.	750-401	753-401	750-403	753-403
Order Text	2DI; 24 VDC; 0.2ms	2DI; 24 VDC; 0.2ms	4DI; 24 VDC; 0.2ms	4DI; 24 VDC; 0.2ms
Technical Data				
Pluggable connector		•		•
Number of digital inputs	2		4	
Signal type	24 VDC		24 VDC	
Voltage range for signal (0)	-3 ... +5 VDC		-3 ... +5 VDC	
Voltage range for signal (1)	15 ... 30 VDC		15 ... 30 VDC	
Sensor connection	2-wire; 3-wire; 4-wire		2 x (2-wire; 3-wire)*	
Input characteristic	High-side switching		High-side switching	
Input filter (digital)	0.2 ms		0.2 ms	
Input current per channel for signal (1) typ.	4.5 mA		4.5 mA	
Supply voltage (sensor)	24 VDC		24 VDC	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	3.7 mA		7.5 mA	
Data width (internal)	2 bits		4 bits	
Isolation	500 V system/field		500 V system/field	
Surrounding air temperature (operation)	0 ... +55 °C		0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm		12 x 69.8 x 100 mm	
Approvals	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx		CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-401	wago.com/753-401	wago.com/750-403	wago.com/753-403
Accessories				
Pluggable connector	753-110		753-110	
Coding keys	753-150		753-150	

*A suitable field side connection module (e.g., 750-614) must also be used to connect other sensors.



Digital Input; 24 VDC; 0.2 ms



Figure: 750-433






Figure: 750-1421

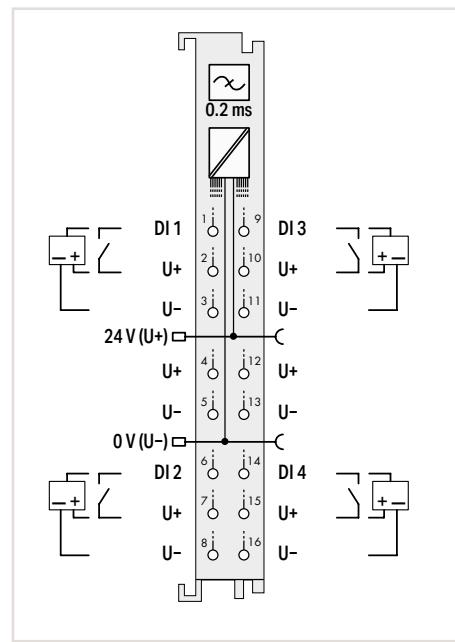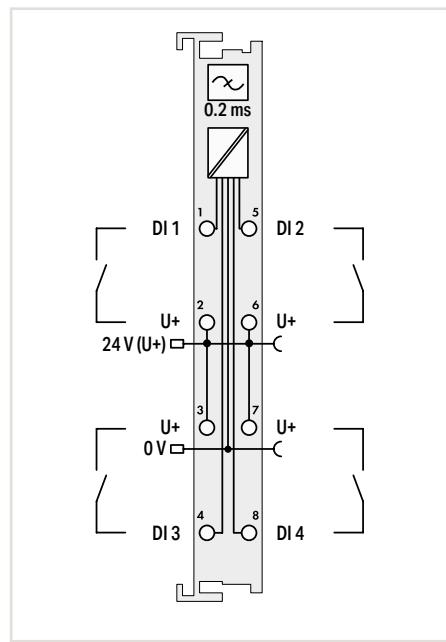

Item Description	4-Channel Digital Input; 24 VDC; 0.2 ms; 2-wire connection		4-Channel Digital Input; 24 VDC; 0.2 ms; 3-wire connection
Version	Standard	Pluggable (delivery without connector)	Standard with 16 connectors
Item No.	750-433	753-433	750-1421
Order Text	4DI; 24 VDC; 0.2ms		4DI; 24 VDC; 0.2ms; 3-wire
Technical Data			
Pluggable connector			•
Number of digital inputs	4		4
Signal type	24 VDC		24 VDC
Voltage range for signal (0)	-3 ... +5 VDC		-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC		11 ... 30 VDC
Sensor connection	2-wire		3-wire
Input characteristic	High-side switching		High-side switching
Input filter (digital)	0.2 ms		0.2 ms
Input current per channel for signal (1) typ.	4.5 mA		4.5 mA
Supply voltage (sensor)	24 VDC		24 VDC
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	5.5 mA		4 mA
Data width (internal)	4 bits		4 bits
Isolation	500 V system/field		500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C		0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm		12 x 69 x 100 mm
Approvals	CE; IECEx Marine; ATEX; OrdLoc/HazLoc; IECEx ATEX/IECEx		CE; IECEx Marine; ATEX; OrdLoc/HazLoc; IECEx ATEX/IECEx
Data sheet and further information, see:	wago.com/750-433	wago.com/753-433	wago.com/750-1421
Accessories			
Pluggable connector	753-110		
Coding keys	753-150		

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 518 or www.wago.com

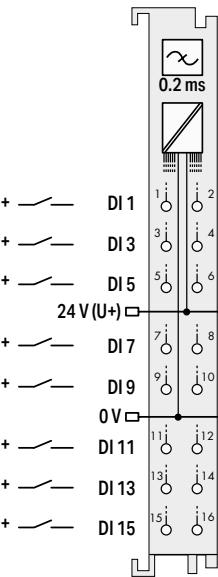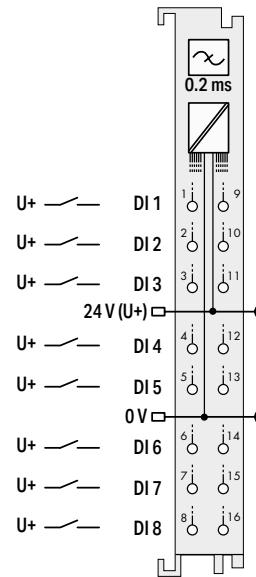

8-Channel Digital Input; 24 VDC; 0.2 ms

Standard	Pluggable (delivery without connector)
750-431	753-431
8DI; 24 VDC; 0.2ms	8DI; 24 VDC; 0.2ms

8-Channel Digital Input; 24 VDC; 0.2 ms; 2-wire connection

Standard with 16 connectors
750-1416
8DI; 24 VDC; 0.2ms; 2-wire

16-Channel Digital Input; 24 VDC; 0.2 ms

Standard with 16 connectors
750-1406
16DI; 24 VDC; 0.2ms

●	
8	
24 VDC	
-3 ... +5 VDC	
15 ... 30 VDC	
1-wire	
High-side switching	
0.2 ms	
2.8 mA	
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
17 mA	
8 bits	
500 V system/field	
0 ... +55 °C	
12 x 67.8 x 100 mm	12 x 69 x 100 mm
CE; IP65; Marine; ATEX/IECEx	wago.com/750-431
	wago.com/753-431

●	
8	
24 VDC	
-3 ... +5 VDC	
11 ... 30 VDC	
2-wire	
High-side switching	
0.2 ms	
4.5 mA	
24 VDC	
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
6 mA	
8 bits	
500 V system/field	
0 ... +55 °C	
12 x 69 x 100 mm	
CE; IP65; Marine; ATEX/IECEx	wago.com/750-1416

●	
16	
24 VDC	
-3 ... +5 VDC	
15 ... 30 VDC	
1-wire	
High-side switching	
0.2 ms	
2.3 mA	
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
25 mA	
16 bits	
500 V system/field	
0 ... +55 °C	
12 x 69 x 100 mm	
CE; IP65; Marine; ATEX/IECEx	wago.com/750-1406

Item No.
753-110
753-150



Digital Input; 24 VDC; 3 ms; Low-Side Switching



Figure: 750-408



Figure: 750-1422

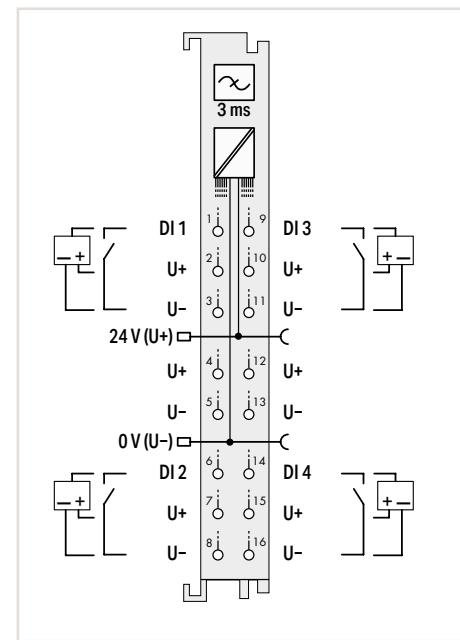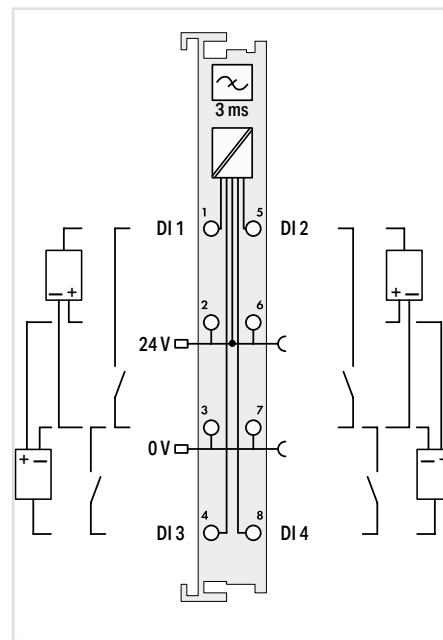

Item Description	4-Channel Digital Input; 24 VDC; 3 ms; Low-side switching			4-Channel Digital Input; 24 VDC; 3 ms; Low-side switching; 3-wire connection
Version	Standard	Extended temperature	Pluggable (delivery without connector)	Standard with 16 connectors
Item No.	750-408	750-408/025-000	753-408	750-1422
Order Text	4DI; 24 VDC; 3ms; LSS	4DI; 24 VDC; 3ms; LSS; T	4DI; 24 VDC; 3ms; LSS	4DI; 24 VDC; 3ms; LSS; 3-wire
Technical Data				
Pluggable connector			•	
Number of digital inputs	4			4
Signal type	24 VDC			24 VDC
Voltage range for signal (0)	$(U_v - 5 \text{ V}) \dots U_v \text{ DC}$			$(U_v - 5 \text{ V}) \dots U_v \text{ DC}$
Voltage range for signal (1)	-3 VDC ... $(U_v - 15 \text{ V})$			-3 VDC ... $(U_v - 15 \text{ V})$
Sensor connection	2 x (2-wire; 3-wire)*			3-wire
Input characteristic	Low-side switching			Low-side switching
Input filter (digital)	3 ms			3 ms
Input current per channel for signal (0) typ.	7 mA			2.5 mA
Supply voltage (sensor)	24 VDC			24 VDC
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	5 mA			7 mA
Data width (internal)	4 bits			4 bits
Isolation	500 V system/field			500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm			12 x 69 x 100 mm
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx			CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-408		wago.com /753-408	wago.com/750-1422
Accessories				
Pluggable connector	753-110			
Coding keys	753-150			

*A suitable field side connection module (e.g., 750-614) must also be used to connect other sensors.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 518 or www.wago.com



Digital Input; 24 VDC; 3 ms; Low-Side Switching



Figure: 750-436



Figure: 750-1417

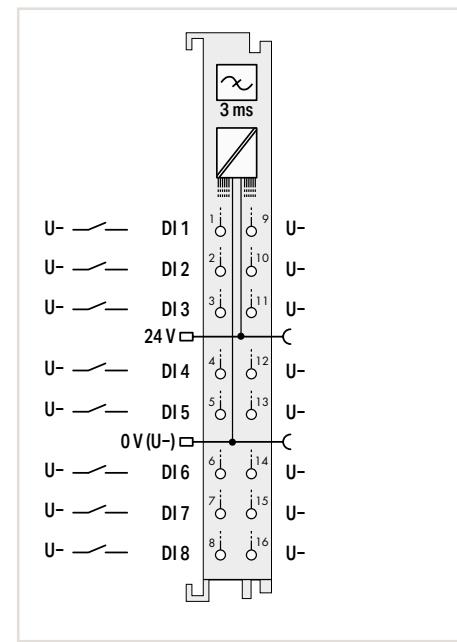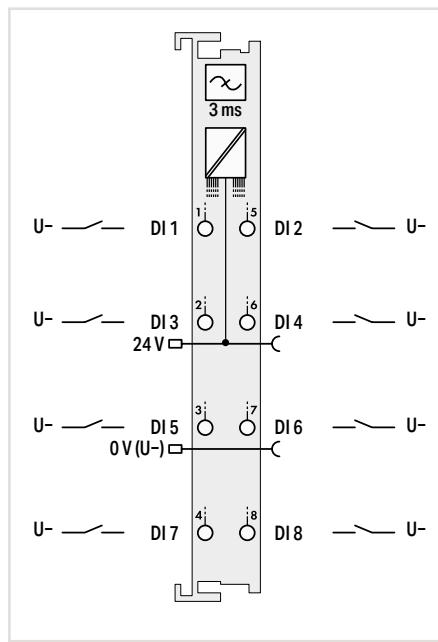

Item Description	8-Channel Digital Input; 24 VDC; 3 ms; Low-side switching		8-Channel Digital Input; 24 VDC; 3 ms; Low-side switching; 2-wire connection
Version	Standard	Pluggable (delivery without connector)	Standard with 16 connectors
Item No.	750-436	753-436	750-1417
Order Text	8DI; 24 VDC; 3ms; LSS	8DI; 24 VDC; 3ms; LSS	8DI; 24 VDC; 3ms; LSS; 2-wire

Technical Data	750-436	753-1417
Pluggable connector	●	
Number of digital inputs	8	8
Signal type	24 VDC	24 VDC
Voltage range for signal (0)	15 ... 30 VDC	(U _v - 5 V) ... U _v DC
Voltage range for signal (1)	-3 ... +5 VDC	-3 VDC ... (U _v - 15 V)
Sensor connection	1-wire	2-wire
Input characteristic	Low-side switching	Low-side switching
Input filter (digital)	3 ms	3 ms
Input current per channel for signal (0) typ.	2.8 mA	2.4 mA
Supply voltage (sensor)	24 VDC	24 VDC
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	13 mA	12 mA
Data width (internal)	8 bits	8 bits
Isolation	500 V system/field	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm	12 x 69 x 100 mm
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-436	wago.com/753-436
Accessories	Item No.	
Pluggable connector	753-110	
Coding keys	753-150	



Digital Input; 24 VDC; 3 ms; Low-Side Switching



Figure: 750-1402



Figure: 750-1407

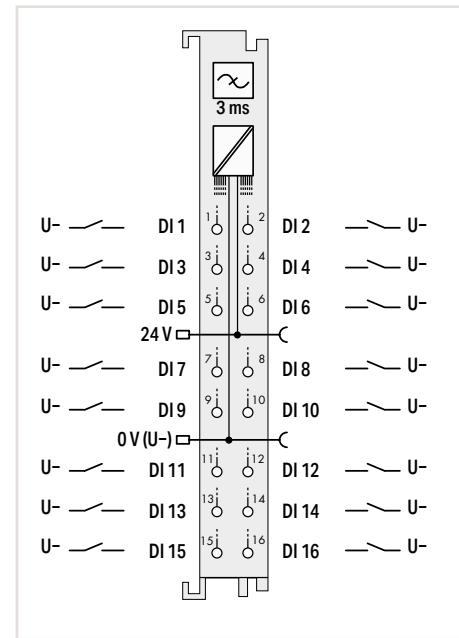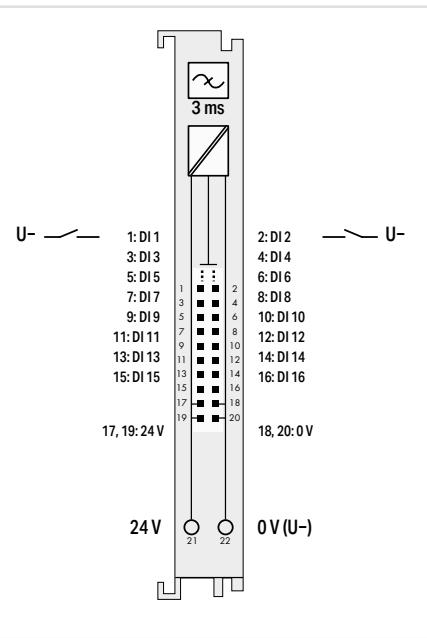

Item Description	16-Channel Digital Input; 24 VDC; 3 ms; Low-side switching; Ribbon cable	
Version	Standard with ribbon cable connector	
Item No.	750-1402	
Order Text		
Technical Data		
Number of digital inputs	16	16
Signal type	24 VDC	24 VDC
Voltage range for signal (0)	(U _v - 5 V) ... U _v DC	(U _v - 5 V) ... U _v DC
Voltage range for signal (1)	-3 VDC ... (U _v - 15 V)	-3 VDC ... (U _v - 15 V)
Sensor connection	1-wire	1-wire
Input characteristic	Low-side switching	Low-side switching
Input filter (digital)	3 ms	3 ms
Input current per channel for signal (1) typ.	2.3 mA	2.3 mA
Supply voltage (sensor)	24 VDC	24 VDC
Supply voltage (field)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	25 mA	25 mA
Data width (internal)	16 bits	16 bits
Isolation	500 V system/field	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 74.1 x 100 mm	12 x 69 x 100 mm
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-1402	
Accessories	Item No.	
Interface modules for system wiring and interface cable	See Section 10	

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 518 or www.wago.com



Digital Input; 24 VDC; 0.2 ms; Low-Side Switching



Figure: 750-409



Figure: 750-1423

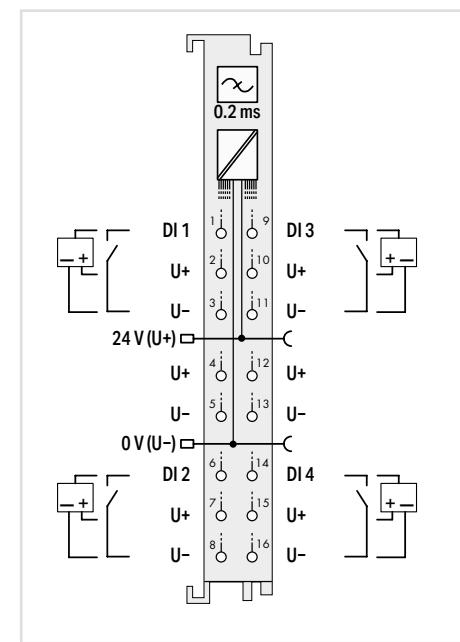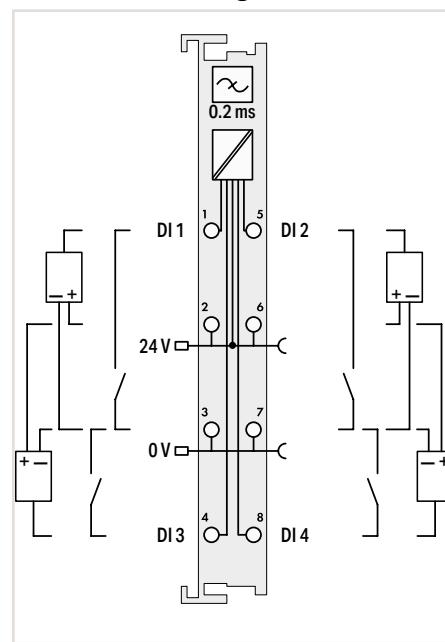

Item Description	4-Channel Digital Input; 24 VDC; 0.2 ms; Low-side switching	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-409	
Order Text	4DI; 24 VDC; 0.2ms; LSS	4DI; 24 VDC; 0.2ms; LSS

Technical Data	750-409	753-409	750-1423
Pluggable connector		•	
Number of digital inputs	4	4	4
Signal type	24 VDC	24 VDC	24 VDC
Voltage range for signal (0)	(U _v - 5 V) ... U _v DC	(U _v - 5 V) ... U _v DC	(U _v - 5 V) ... U _v DC
Voltage range for signal (1)	-3 VDC ... (U _v - 15 V)	-3 VDC ... (U _v - 15 V)	-3 VDC ... (U _v - 15 V)
Sensor connection	2 x (2-wire; 3-wire)*		3-wire
Input characteristic	Low-side switching	Low-side switching	Low-side switching
Input filter (digital)	0.2 ms	0.2 ms	0.2 ms
Input current per channel for signal (0) typ.	7 mA	7 mA	2.5 mA
Supply voltage (sensor)	24 VDC		24 VDC
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	5 mA		7 mA
Data width (internal)	4 bits		4 bits
Isolation	500 V system/field		500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C		0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm		12 x 69 x 100 mm
Approvals	CE; IECEx; OrdLoc/HazLoc; ATEX/IECEx	wago.com/750-409	CE; IECEx; Marine; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:		wago.com/753-409	wago.com/750-1423
Accessories		Item No.	
Pluggable connector		753-110	
Coding keys		753-150	

*A suitable field side connection module (e.g., 750-614) must also be used to connect other sensors.



Digital Input; 24 VDC; 0.2 ms; Low-Side Switching



Figure: 750-437



Figure: 750-1418

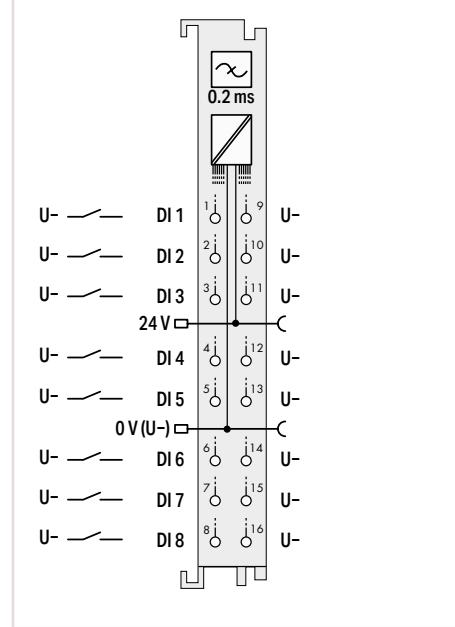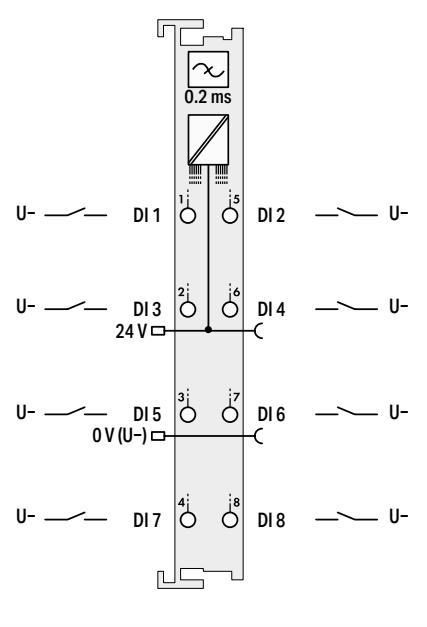

Item Description	8-Channel Digital Input; 24 VDC; 0.2 ms; Low-side switching	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-437	753-437
Order Text	8DI; 24 VDC; 0.2ms; LSS	8DI; 24 VDC; 0.2ms; LSS

Technical Data

Pluggable connector	●	
Number of digital inputs	8	8
Signal type	24 VDC	24 VDC
Voltage range for signal (0)	15 ... 30 VDC	(U _v - 5 V) ... U _v DC
Voltage range for signal (1)	-3 ... +5 VDC	-3 VDC ... (U _v - 15 V)
Sensor connection	1-wire	2-wire
Input characteristic	Low-side switching	Low-side switching
Input filter (digital)	0.2 ms	0.2 ms
Input current per channel for signal (0) typ.	2.8 mA	2.4 mA
Supply voltage (sensor)	24 VDC	24 VDC
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	13 mA	12 mA
Data width (internal)	8 bits	8 bits
Isolation	500 V system/field	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm	12 x 69 x 100 mm
Approvals	CE, UL, Marine; UL OrdLoc/HazLoc; ATEX/IECEx	CE, UL, Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-437	wago.com/753-437
Accessories	Item No.	
Pluggable connector	753-110	
Coding keys	753-150	

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"


“ Approvals and corresponding ratings, see page 518 or www.wago.com

Digital Input; 24 VDC; Proximity Sensor



Figure: 750-410

Figure: 753-410

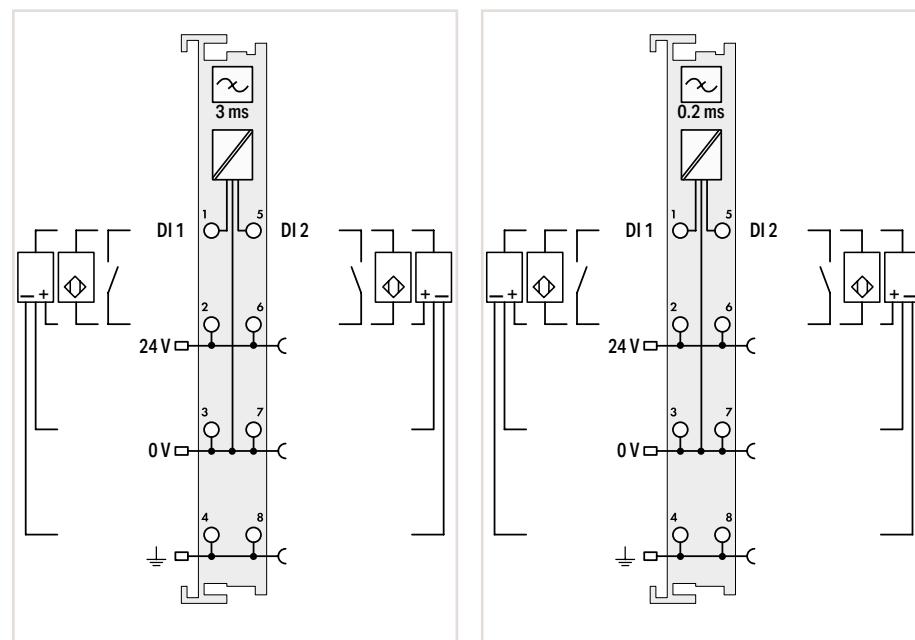

Item Description	2-Channel Digital Input; 24 VDC; 3 ms; Proximity sensor		2-Channel Digital Input; 24 VDC; 0.2 ms; Proximity sensor	
Version	Standard	Pluggable (delivery without connector)	Standard	Pluggable (delivery without connector)
Item No.	750-410	753-410	750-411	753-411
Order Text	2DI; 24 VDC; 3ms; Proxi Sensor	2DI; 24 VDC; 3ms; Proxi Sensor	2DI; 24 VDC; 0.2ms; Proxi Sensor	2DI; 24 VDC; 0.2ms; Proxi Sensor

Technical Data			
Pluggable connector		•	•
Number of digital inputs	2	2	2
Signal type	24 VDC	24 VDC	24 VDC
Voltage range for signal (0)	-3 ... +5 VDC	-3 ... +5 VDC	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC	15 ... 30 VDC	15 ... 30 VDC
Sensor connection	2-wire; 3-wire; 4-wire	2-wire; 3-wire; 4-wire	2-wire; 3-wire; 4-wire
Input characteristic	High-side switching	High-side switching	High-side switching
Input filter (digital)	3 ms	0.2 ms	0.2 ms
Input current per channel for signal (1) typ.	8 mA	8 mA	8 mA
Supply voltage (sensor)	24 VDC	24 VDC	24 VDC
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	2.5 mA	2.5 mA	2.5 mA
Data width (internal)	2 bits	2 bits	2 bits
Isolation	500 V system/field	500 V system/field	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-410	wago.com/753-410	wago.com/750-411

Accessories	Item No.	Item No.
Pluggable connector	753-110	753-110
Coding keys	753-150	753-150


Digital Input; NAMUR



Figure: 750-425



Figure: 753-425

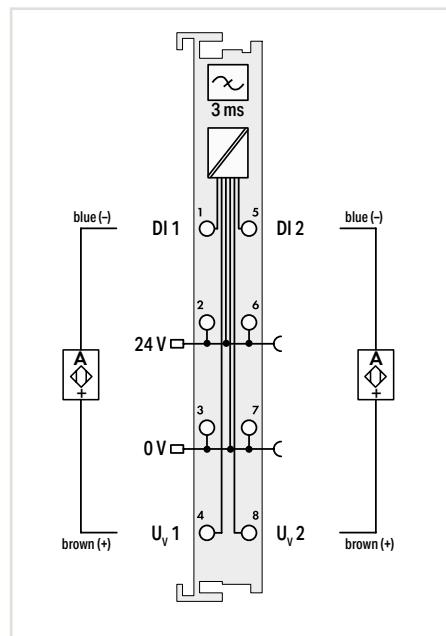

Item Description	2-Channel Digital Input; NAMUR	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-425	753-425
Order Text	2DI; NAMUR	2DI; NAMUR
Technical Data		
Pluggable connector		•
Number of digital inputs	2	
Signal type	NAMUR	
Signal current (0) NAMUR	≤ 1.2 mA	
Signal current (1) NAMUR	≥ 2.1 mA	
Sensor connection	2-wire	
Input characteristic	High-side switching	
Input filter (digital)	3 ms	
Open-circuit voltage	8.2 VDC	
Diagnostics	Short circuit; wire break	
Supply voltage (sensor)	8.2 VDC; short-circuit-protected; isolated channels	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	5 mA	
Data width (internal)	4 bits	
Isolation	500 V system/field	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-425	wago.com/753-425
Accessories		
Pluggable connector	Item No.	
Coding keys	753-110	
	753-150	

This digital input module receives control signals from NAMUR proximity sensors (per DIN EN 60947-5-6) from the field side. Each channel of the sensors is supplied with a short-circuit-protected voltage of 8.2 V. A short circuit or a line break is indicated in the process image (1 bit) and via the red LED.

The green LED indicates the input status:

- Signal current (0): LED off
 - Signal current (1): LED on
- Field and system levels are electrically isolated.


Digital Input; Intruder Detection



Figure: 750-424



Figure: 753-424

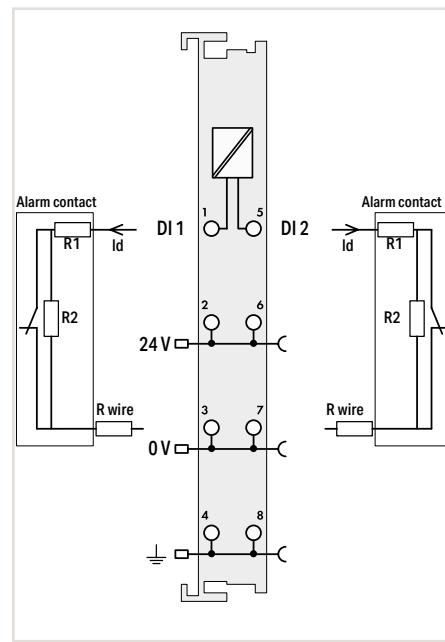

Item Description
Pluggable (delivery without connector)
750-424
2DI; Intruder Detection

Technical Data
Pluggable connector
Number of digital inputs
Signal type
Sensor connection
Specific sensor properties
Supply voltage (sensor)
Supply voltage (field)
Current consumption, field supply (module with no external load)
Current consumption – system supply (5 V)
Data width (internal)
Isolation
Surrounding air temperature (operation)
Dimensions W x H x D
Approvals
Data sheet and further information, see:

Accessories
Pluggable connector
Coding keys

2-Channel Digital Input; Intruder detection	
Standard	Pluggable (delivery without connector)
750-424	753-424
2DI; Intruder Detection	2DI; Intruder Detection

This I/O module incorporates a current loop, which makes it possible to monitor alarm contacts (window contacts) with a fixed resistance ratio (R1, R2), for intruder detection.

The module indicates the status of the connected contact via LEDs and status bits in the process image.



●
2
Current loop (intruder detection)
2-wire
Alarm contact: R1 = 1.5 kΩ (±5 %); R2 = 2.2 kΩ (±5 %), Conductor resistance (R wire) max. 200 Ω
24 VDC
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
16 mA
6 mA
4 bits
500 V system/field
0 ... +55 °C
12 x 69.8 x 100 mm
CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx
wago.com/750-424 wago.com/753-424

Digital Input; 24 VDC; Pulse Extension



Figure: 750-422

Figure: 753-422

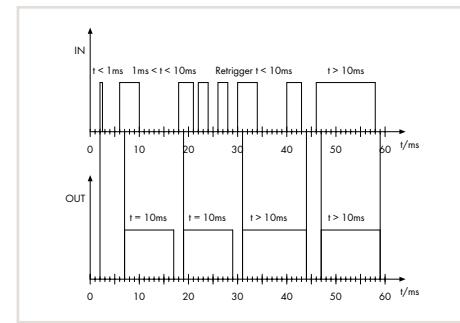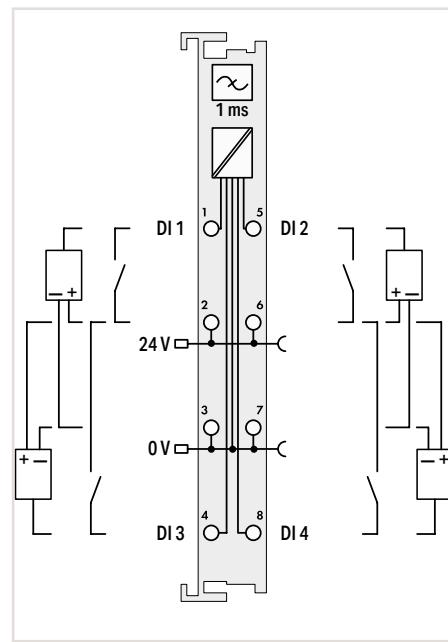

Item Description	4-Channel Digital Input; 24 VDC; Pulse extension	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-422	753-422
Order Text	4DI; 24 VDC; Pulse Extention	4DI; 24 VDC; Pulse Extention

This I/O module extends input signals to at least 10 ms. Only signals ≥ 1 ms will be acquired.
Input signals with a pulse duration > 10 ms are not extended (without fall delay).
Field and system levels are electrically isolated.

Technical Data

Pluggable connector	●
Number of digital inputs	4
Signal type	24 VDC
Voltage range for signal (0)	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC
Sensor connection	2 x (2-wire; 3-wire)*
Input characteristic	High-side switching
Input filter (digital)	1 ms
Input current per channel for signal (1) typ.	4 mA
Signal frequency (max.)	80 Hz
Supply voltage (sensor)	24 VDC
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	9 mA
Data width (internal)	4 bits
Isolation	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; UL; CSA; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-422 wago.com/753-422

5.2

Accessories

Pluggable connector	753-110
Coding keys	753-150

*A suitable field side connection module (e.g., 750-614) must also be used to connect other sensors.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 518 or www.wago.com



Digital Input; 24 VAC/DC



Figure: 750-415



Figure: 753-415

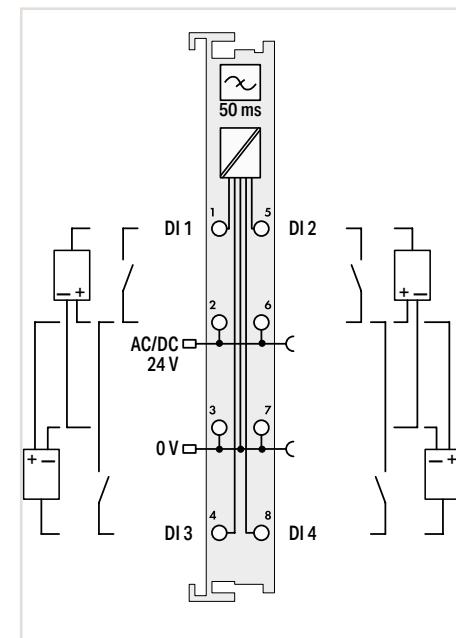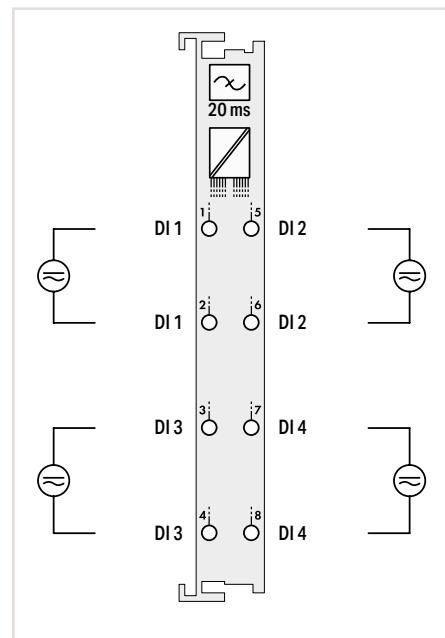

Item Description
Version
Item No.
Order Text

4-Channel Digital Input; 24 VAC/DC; 20 ms	
Standard	Pluggable (delivery without connector)
750-415	753-415
4DI; 24 VAC/VDC; 20ms	4DI; 24 VAC/VDC; 20ms

4-Channel Digital Input; 24 VAC/DC; 50 ms	
Standard	Pluggable (delivery without connector)
750-423	753-423
4DI; 24 VAC/VDC; 50ms	4DI; 24 VAC/VDC; 50ms

Technical Data	
Pluggable connector	
Number of digital inputs	4
Signal type	24 VAC/DC
Voltage range for signal (0)	-3 ... +5 VDC; 0 ... 5 VAC
Voltage range for signal (1)	11 ... 30 VDC; 10 ... 27 VAC
Sensor connection	2-wire
Input characteristic	High-side switching
Input filter (digital)	20 ms
Input current (typ.) at 24 VDC	7.5 mA
Input current (typ.) at 24 VAC	9.5 mA
Supply voltage (sensor)	
Supply voltage (field)	24 VAC/DC 24 V AC/DC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	10 mA
Data width (internal)	4 bits
Isolation	500 V (system/field); 50 V (channel/channel)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-415 wago.com/753-415
Accessories	
Pluggable connector	753-110
Coding keys	753-150

Item No.
753-110
753-150

Item No.
753-110
753-150

Notice:
An additional supply module must be added for 24 VAC supply!

*A suitable field side connection module (e.g., 750-614) must also be used to connect other sensors.


Digital Input; 42 VAC/DC



Figure: 750-428



Figure: 753-428

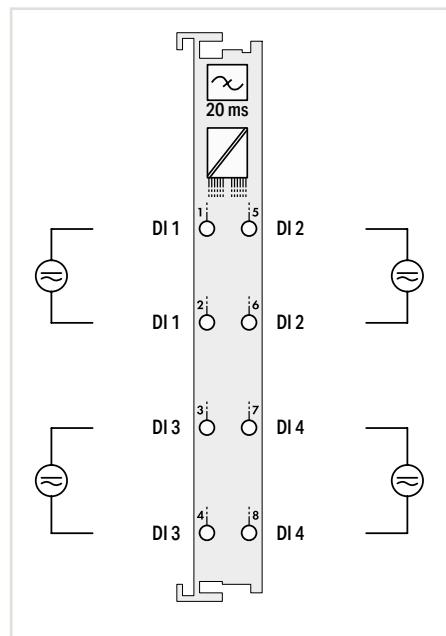

Item Description	4-Channel Digital Input; 24 VAC/DC; 20 ms	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-428	753-428
Order Text	4DI; 42 VAC/VDC; 20ms	4DI; 42 VAC/VDC; 20ms

Technical Data

Pluggable connector	●
Number of digital inputs	4
Signal type	42 VAC/VDC
Voltage range for signal (0)	-3 ... +10 VDC; 0 ... 10 VAC
Voltage range for signal (1)	30 ... 53 VDC; 30 ... 53 VAC
Sensor connection	2-wire
Input characteristic	High-side switching
Input filter (digital)	20 ms
Input current (typ.) at 42 VDC	3.6 mA
Input current (typ.) at 42 VAC	6 mA
Current consumption – system supply (5 V)	5 mA
Data width (internal)	4 bits
Isolation	500 V (system/field); 500 V (channel/channel)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; UL; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-428 wago.com/753-428
Accessories	
Pluggable connector	753-110
Coding keys	753-150

“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 518 or www.wago.com


Digital Input; 48 VDC



Figure: 750-412



Figure: 753-412

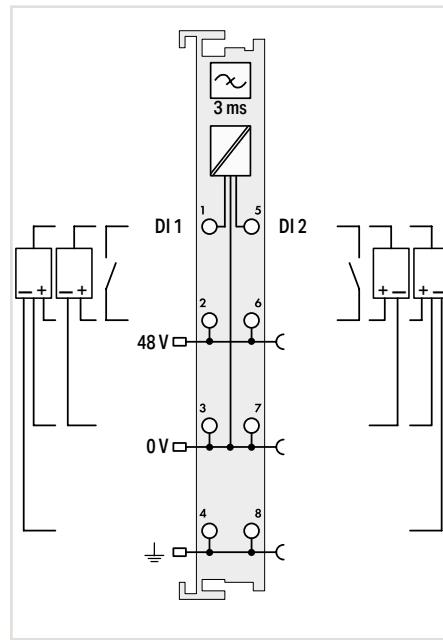

Item Description
Pluggable connector
Number of digital inputs
Signal type
Voltage range for signal (0)
Voltage range for signal (1)
Sensor connection
Input characteristic
Input filter (digital)
Input current per channel for signal (1) typ.
Supply voltage (sensor)
Supply voltage (field)
Current consumption – system supply (5 V)
Data width (internal)
Isolation
Surrounding air temperature (operation)
Dimensions W x H x D
Approvals
Data sheet and further information, see:

2-Channel Digital Input; 48 VDC; 3 ms	
Standard	Pluggable (delivery without connector)
750-412	753-412
2DI; 48 VDC; 3ms	2DI; 48 VDC; 3ms


Technical Data

Pluggable connector	●
Number of digital inputs	2
Signal type	48 VDC
Voltage range for signal (0)	-6 ... +10 VDC
Voltage range for signal (1)	34 ... 60 VDC
Sensor connection	2-wire; 3-wire; 4-wire
Input characteristic	High-side switching
Input filter (digital)	3 ms
Input current per channel for signal (1) typ.	3.8 mA
Supply voltage (sensor)	48 VDC
Supply voltage (field)	48 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	2.5 mA
Data width (internal)	2 bits
Isolation	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; UL; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-412 wago.com/753-412
Accessories	Item No.
Pluggable connector	753-110
Coding keys	753-150

Notice:

An additional supply module must be added for 48 VDC supply!

Digital Input; 60 VDC

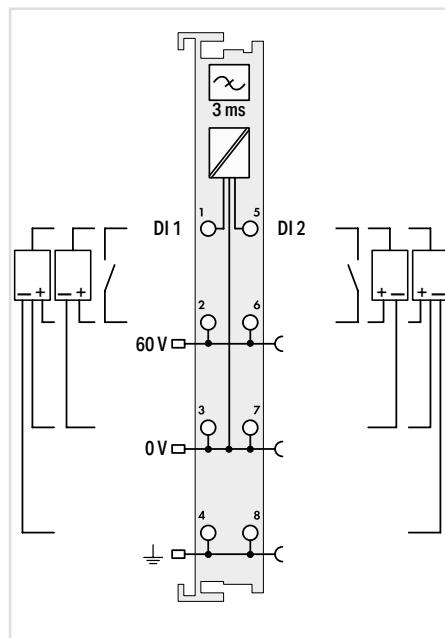

Item Description	2-Channel Digital Input; 60 VDC; 3 ms
Version	Pluggable (delivery without connector)
Item No.	753-429
Order Text	2DI; 60 VDC; 3ms
Technical Data	
Pluggable connector	•
Number of digital inputs	2
Signal type	60 VDC
Voltage range for signal (0)	-7.5 ... +12 VDC
Voltage range for signal (1)	44 ... 75 VDC
Sensor connection	2-wire; 3-wire; 4-wire
Input characteristic	High-side switching
Input filter (digital)	3 ms
Input current per channel for signal (1) typ.	2.9 mA
Supply voltage (sensor)	60 VDC
Supply voltage (field)	60 VDC (-20 ... +25 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	2.5 mA
Data width (internal)	2 bits
Isolation	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; KC; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/753-429
Accessories	
Pluggable connector	753-110
Coding keys	753-150

Notice:
An additional supply module must be added for 60 VDC supply!

- „ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"
- „ Approvals and corresponding ratings, see page 518 or www.wago.com


Digital Input, 110 VDC or 220 VDC



Figure: 750-427



Figure: 750-407

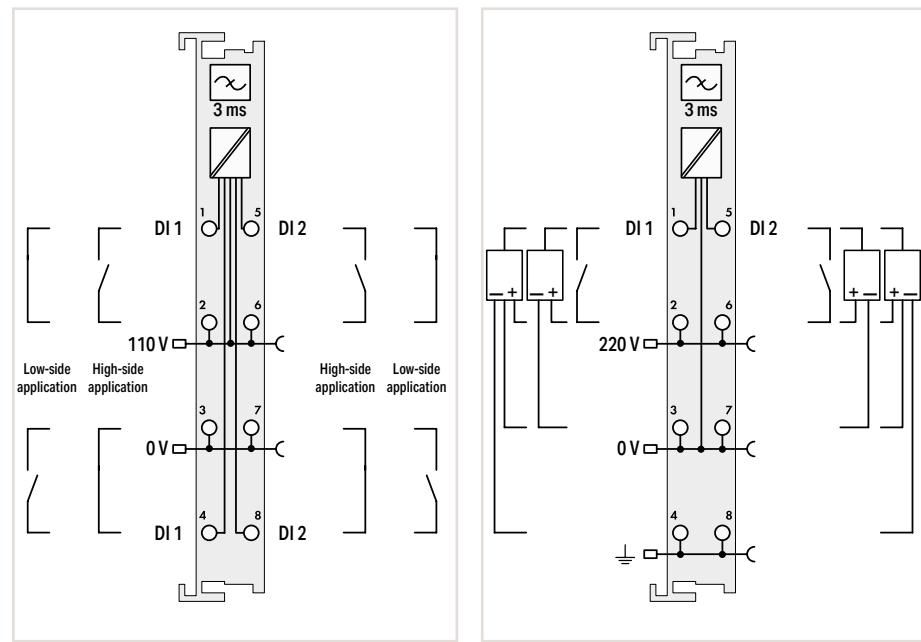

Item Description	2-Channel Digital Input; 110 VDC		2-Channel Digital Input; 220 VDC	
Version	Standard	Pluggable (delivery without connector)	Standard	
Item No.	750-427	753-427	750-407	
Order Text	2DI; 110 VDC	2DI; 110 VDC	2DI; 220 VDC	
Technical Data				
Pluggable connector		•		
Number of digital inputs	2		2	
Signal type	110 VDC		220 VDC	
Voltage range for signal (0)	-14 ... +50 VDC		-3 ... +100 VDC	
Voltage range for signal (1)	-70 ... +143 VDC		160 ... 286 VDC	
Sensor connection	2-wire		2-wire; 3-wire; 4-wire	
Input characteristic	High-side/low-side switching; configurable		High-side switching	
Input filter (digital)	3 ms		3 ms	
Input current per channel for signal (1) typ.	2.5 mA		1.2 mA	
Supply voltage (sensor)	110 VDC		220 VDC	
Supply voltage (field)	110 VDC (-20 ... +25 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		220 VDC (-20 ... +25 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	2.5 mA		5 mA	
Data width (internal)	2 bits		2 bits	
Isolation	1500 V (system/field)		2500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C		0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm		12 x 69.8 x 100 mm	
Approvals	CE; UL; CSA; OrdLoc/HazLoc; ATEX/IECEx		CE; UL; CSA; OrdLoc	
Data sheet and further information, see:	wago.com/750-427	wago.com/753-427	wago.com/750-407	
Accessories				
Pluggable connector		Item No.		
Coding keys		753-110		
		753-150		

Notice:

An additional supply module must be added for 110 VDC supply!

Notice:

An additional supply module must be added for 220 VDC supply!

Digital Input; 120 or 230 VAC



Figure: 750-406


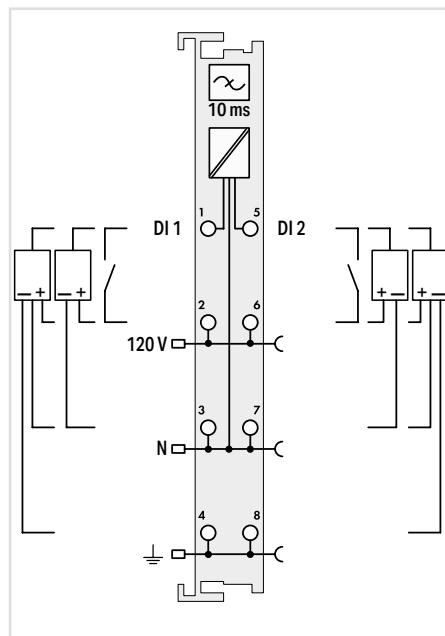


Figure: 753-406

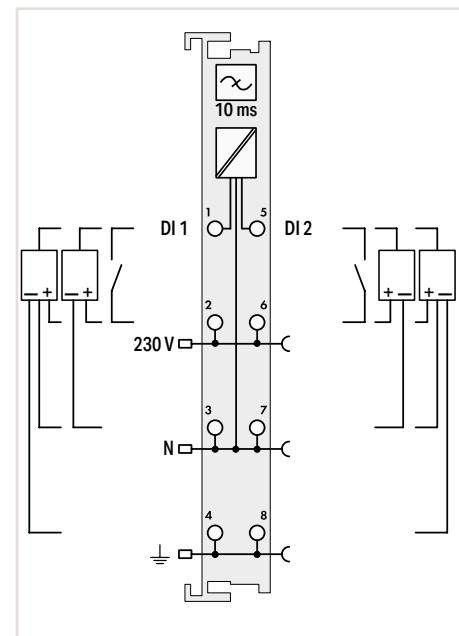

Item Description	2-Channel Digital Input; 120 VAC		2-Channel Digital Input; 230 VAC	
Version	Standard	Pluggable (delivery without connector)	Standard	Pluggable (delivery without connector)
Item No.	750-406	753-406	750-405	753-405
Order Text	2DI; 120 VAC	2DI; 120 VAC	2DI; 230 VAC	2DI; 230 VAC
Technical Data				
Pluggable connector		•		•
Number of digital inputs	2		2	
Signal type	120 VAC		230 VAC	
Voltage range for signal (0)	0 ... 20 VAC		0 ... 40 VAC	
Voltage range for signal (1)	79 VAC ... 1.1 U _N		164 VAC ... 1.1 U _N	
Sensor connection	2-wire; 3-wire; 4-wire		2-wire; 3-wire; 4-wire	
Input characteristic	High-side switching		High-side switching	
Input filter (digital)	10 ms		10 ms	
Signal frequency (min./max.)	45 Hz/65 Hz		45 Hz/65 Hz	
Input current per channel for signal (1) typ.	4.5 mA		6.5 mA	
Supply voltage (sensor)	120 VAC		230 VAC	
Supply voltage (field)	120 VAC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		230 VAC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	2 mA		2 mA	
Data width (internal)	2 bits		2 bits	
Isolation	1500 V (system/field)		1500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C		0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm		12 x 69.8 x 100 mm	
Approvals	CE; ■■■ Marine; ■■■ OrdLoc/HazLoc; ■■■ ATEX/IECEx		CE; ■■■ Marine; ■■■ OrdLoc/HazLoc; ■■■ ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-406	wago.com/753-406	wago.com/750-405	wago.com/753-405
Accessories		Item No.		Item No.
Pluggable connector		753-110		753-110
Coding keys		753-150		753-150

Notice:

An additional supply module must be added for 120 VAC supply!


Notice:

An additional supply module must be added for 230 VAC supply!

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 518 or www.wago.com


Digital Input; 120 / 230 VAC

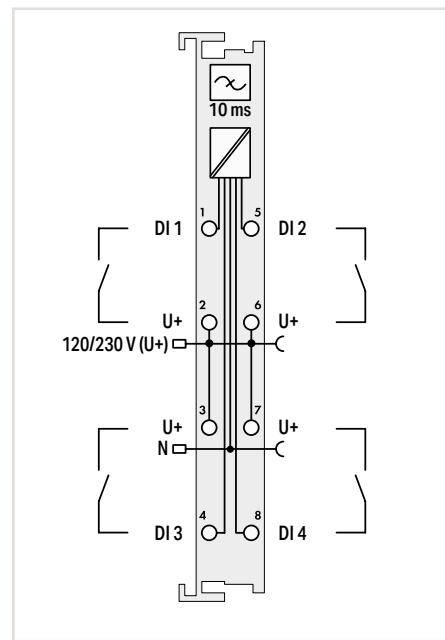

Item Description	4-Channel Digital Input; 120/230 VAC
Version	Pluggable (delivery without connector)
Item No.	753-440
Order Text	4DI; 120/230 VAC
Technical Data	
Pluggable connector	●
Number of digital inputs	4
Signal type	120 (230) VAC
Voltage range for signal (0)	0 ... 40 VAC
Voltage range for signal (1)	79 ... 230 VAC (-15 ... +10 %)
Sensor connection	2-wire
Input characteristic	High-side switching
Input filter (digital)	10 ms
Signal frequency (min./max.)	45 Hz/65 Hz
Oversupply protection	275 VAC (varistor)
Input current (typ.) at 120 VAC	2.3 mA
Input current (typ.) at 230 VAC	4.7 mA
Supply voltage (sensor)	230 VAC
Supply voltage (field)	90 ... 230 VAC (-15 ... +10 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	15 mA
Data width (internal)	4 bits
Isolation	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; ; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/753-440
Accessories	Item No.
Pluggable connector	753-110
Coding keys	753-150

Notice:
An additional supply module must be added for
120/230 VAC supply!


Digital Input; PTC

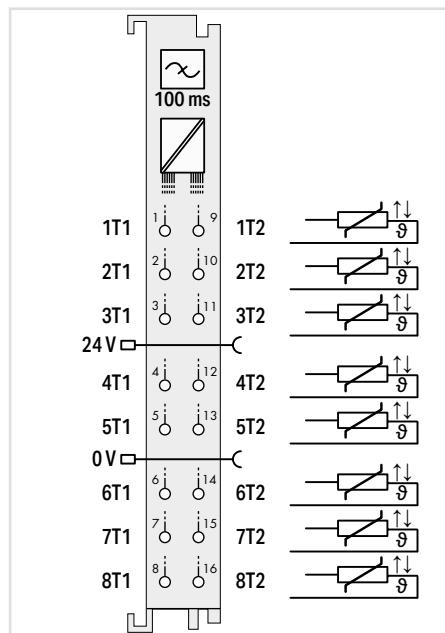

Item Description	8-Channel Digital Input; PTC
Version	Standard with 16 connectors
Item No.	750-1425
Order Text	8DI; PTC
Technical Data	
Number of digital inputs	8
Signal type	PTC; Thermistor per DIN 44081/44082
Sensor	<p>Sensor voltage: $\leq 2.5 \text{ V} \leq 7.5 \text{ V}$ (dependent on resistance value); Number of PTCs per channel: Max. 6 in a series; Operating value (status bit "1" to "0"): $R \geq 3 \text{ k}\Omega$; Return value (status bit "0" to "1"): $\leq 1.5 \text{ k}\Omega$; Hysteresis: $R = 1.5 \text{ k}\Omega$; Wire break value: $R \geq 8 \text{ k}\Omega$; Short circuit value: $R \leq 20 \Omega$</p>
Input filter (digital)	100 ms
Output current (max.)	0.001 A
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	52 mA
Data width (internal)	16 bits
Isolation	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69 x 100 mm
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-1425

The PTC module is used to connect PTC thermistors according to DIN 44081 and DIN 44082 for thermal monitoring (overload protection) of motors, machinery, bearings, etc. Up to six PTC thermistors can be connected in series per channel. If the nominal response temperature (ϑ_{nat}) is exceeded, a bit is set in the module's input process image. In addition, wire breaks and short circuits are monitored for each channel. If an error occurs, a bit is also set in the input process image. One green and one red status LED per channel indicate an overtemperature or wiring errors.

Digital Output Modules



Housing design (750 Series)


Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 67.8 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 60.6 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

Housing design (753 Series)

Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 69 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 61.8 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	9 ... 10 mm / 0.37 inch

Specialty housing (750 Series)

Dimensions W x H x D	24 x 67.8 x 100 mm
Height from upper-edge of DIN-rail	60.6 mm

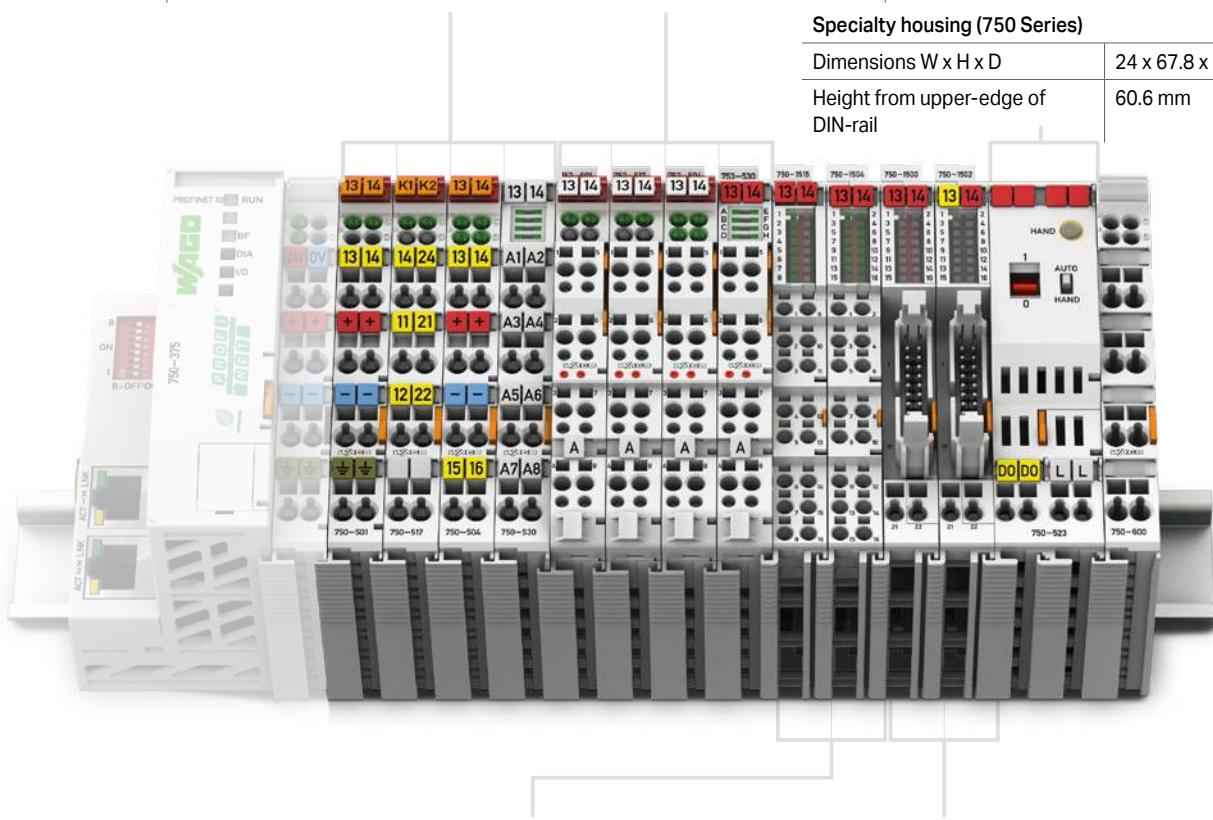

Housing design (750 Series), with Push-in CAGE CLAMP® connections (up to 16 connection points)

Dimensions W x H x D	12 x 69 x 100 mm
Height from upper-edge of DIN-rail	61.8 mm
Connection technology	Push-in CAGE CLAMP®
Conductor cross section	Solid: 0.08 ... 1.5 mm² / 28 ... 16 AWG Fine-stranded: 0.25 ... 1.5 mm² / 22 ... 16 AWG
Strip length	8 ... 9 mm / 0.33 inch

Housing design (750 Series), with ribbon cable connection

Dimensions W x H x D	12 x 74.1 x 100 mm
Height from upper-edge of DIN-rail	66.9 mm
Connection technology	20-pole male connector + 2 x CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch



I/O System –
750 XTR Series



I/O System – 750 and 753 Series, Digital Output Modules

Contents



Function	1-Channel DO	2-Channel DO	4-Channel DO	8-Channel DO	16-Channel DO	Description	Item Number			Page
							Standard	Extended Temperature	Pluggable	
5 VDC		■				4-Channel Digital Output; 5 VDC; 20 mA	750-519			194
5/12 VDC			■			8-Channel Digital Output; 12 VDC; 1 A	750-534		753-534	194
24 VDC	■					2-Channel Digital Output; 24 VDC; 0.5 A	750-501		753-501	195
	■					2-Channel Digital Output; 24 VDC; 0.5 A; Interference-free	750-501/000-800		753-501/000-800	195
	■					2-Channel Digital Output; 24 VDC; 2.0 A	750-502		753-502	196
	■					2-Channel Digital Output; 24 VDC; 2.0 A; Interference-free	750-502/000-800		753-502/000-800	196
	■					2-Channel Digital Output; 24 VDC; 0.5 A; Diagnostics	750-506		753-506	197
	■					2-Channel Digital Output; 24 VDC; 0.5 A; Interference-free; Diagnostics	750-506/000-800			197
	■					2-Channel Digital Output; 24 VDC; 2.0 A; Diagnostics	750-508*		753-508	197
	■					2-Channel Digital Output; 24 VDC; 2.0 A; Interference-free; Diagnostics	750-508/000-800			197
	■					4-Channel Digital Output; 24 VDC; 0.5 A	750-504	750-504/025-000	753-504	198
	■					4-Channel Digital Output; 24 VDC; 0.5 A; Interference-free	750-504/000-800	750-504/025-800		198
	■					4-Channel Digital Output; 24 VDC; 0.5 A; 2-wire connection	750-531		753-531	199
	■					4-Channel Digital Output; 24 VDC; 0.5 A; 2-wire connection; Interference-free	750-531/000-800		753-531/000-800	199
	■					4-Channel Digital Output; 24 VDC; 0.5 A; Low-side switching	750-516		753-516	200
	■					4-Channel Digital Output; 24 VDC; 0.5 A; Diagnostics	750-532			200
	■					8-Channel Digital Output; 24 VDC; 0.5 A	750-530	750-530/025-000	753-530	201
	■					8-Channel Digital Output; 24 VDC; 0.5 A; Low-side switching	750-536		753-536	201
	■					8-Channel Digital Output; 24 VDC; 0.5 A; Diagnostics	750-537*		753-537	201
	■					8-Channel Digital Output; 24 VDC; 0.5 A; 2-wire connection	750-1515*			202
	■					8-Channel Digital Output; 24 VDC; 0.5 A; Low-side switching; 2-wire connection	750-1516			202
	■					8-Channel Digital Input/Output; 24 VDC; 0.5 A; Ribbon cable	750-1502			203
	■					8-Channel Digital Input/Output; 24 VDC; 0.5 A	750-1506			203
	■					16-Channel Digital Output; 24 VDC; 0.5 A; Ribbon cable	750-1500			204
	■					16-Channel Digital Output; 24 VDC; 0.5 A	750-1504			204
	■					16-Channel Digital Output; 24 VDC; 0.5 A; Low-side switching; Ribbon cable	750-1501			205
	■					16-Channel Digital Output; 24 VDC; 0.5 A; Low-side switching	750-1505			205
120/230 VAC		■				4-Channel Digital Output; 230 VAC; 0.25 A; Solid-state			753-540	206
230 VAC/VDC	■					2-Channel Digital Output; 230 VAC; 0.3 A; Solid-state	750-509		753-509	206
Relays	■					2-Channel Relay Output; 125 VAC; 0.5 A; Potential-free; 2 changeover contacts	750-514		753-514	207
	■					2-Channel Relay Output; 250 VAC; 0.5 A; Potential-free; 2 changeover contacts	750-517*		753-517	208
	■					2-Channel Relay Output; 250 VAC; 2.0 A; 2 make contacts	750-512		753-512	208
	■					2-Channel Relay Output; 250 VAC; 2.0 A; Potential-free; 2 make contacts	750-513		753-513	209
	■					2-Channel Relay Output; 250 VAC; 2.0 A; Potential-free; 2 make contacts; without power jumper contacts	750-513/000-001		753-513/000-001	209
	■					4-Channel Relay Output; 250 VAC; 2.0 A; Potential-free; 4 make contacts	750-515			210
	■					1-Channel Relay Output; 250 VAC; 16 A; Potential-free; 1 make contact	750-523			211
Functional Safety							See Section 5.8			
Ex i							See Section 5.9			
*This module is also available as a 750 XTR Series variant.							See Section 6			

Digital Output; 5 or 12 VDC



Figure: 750-519

Figure: 753-534

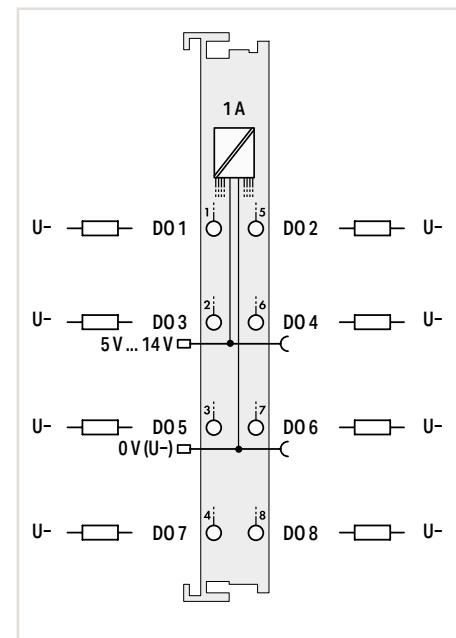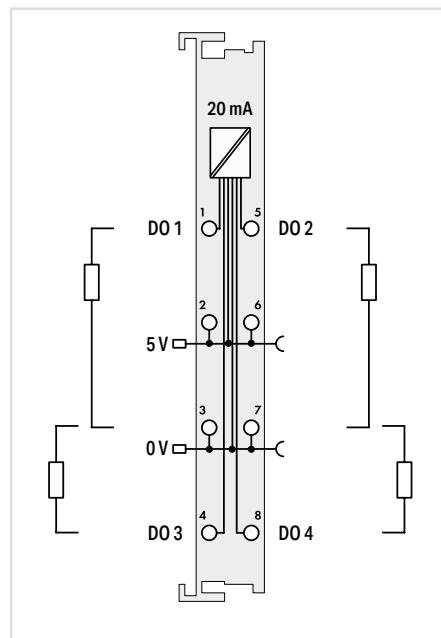

Item Description	4-Channel Digital Output; 5 VDC; 20 mA	8-Channel Digital Output; 12 VDC; 1 A
Version	Standard	Standard
Item No.	750-519	753-534
Order Text	4DO; 5 VDC; 20mA	8DO; 12 VDC; 1A
Technical Data		
Pluggable connector		•
Number of digital outputs	4	8
Signal type	5 VDC	5 ... 14 VDC
Output characteristic	High-side switching	High-side switching
Output current per channel	20 mA; short-circuit-protected	1 A; short-circuit-protected
Load type	Resistive; inductive; lamp load	Resistive; inductive
Actuator connection	2 x (2-wire)*	1-wire
Switching frequency (max.)	5 kHz	2 kHz
Supply voltage (field)	5 VDC; via power jumper contacts (power supply via blade contact; transmission via spring contact)	14 VDC; via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	10 mA	20 mA
Data width (internal)	4 bits	8 bits
Isolation	500 V (system/field)	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 67.8 x 100 mm 12 x 69 x 100 mm
Approvals	CE; KC; UL OrdLoc/HazLoc	CE; KC; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-519	wago.com/750-534 wago.com/753-534
Accessories		
Pluggable connector		
Coding keys		
Item No.		
753-110		
753-150		

Notice:

An additional supply module must be added for 5 VDC supply!

*A suitable field side connection module (e.g., 750-614) must also be used to connect other actuators.

Notice:

An additional supply module must be added for 5-14 VDC supply!


Digital Output; 24 VDC



Figure: 750-501



Figure: 753-501

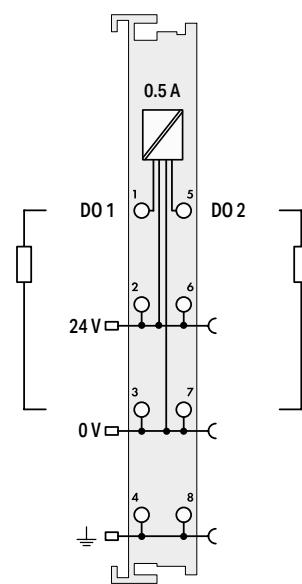

Item Description				
Version	2-Channel Digital Output; 24 VDC; 0.5 A			
Item No.	Standard	Interference-free	Pluggable (delivery without connector)	Pluggable (delivery without connector); Interference-free
Order Text	750-501	750-501/000-800	753-501	753-501/000-800
	2DO; 24 VDC; 0.5A	2DO; 24 VDC; 0.5A; IF	2DO; 24 VDC; 0.5A	2DO; 24 VDC; 0.5A; IF
Technical Data				
Pluggable connector				
Interference-free for use in safety functions				
Number of digital outputs	2			
Signal type	24 VDC			
Output characteristic	High-side switching			
Output current per channel	0.5 A; short-circuit-protected			
Load type	Resistive; inductive; lamp load			
Actuator connection	2-wire; 3-wire; 4-wire			
Switching frequency (max.)	5 kHz			
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			
Current consumption – system supply (5 V)	3.5 mA			
Data width (internal)	2 bits			
Isolation	500 V (system/field)			
Surrounding air temperature (operation)	0 ... +55 °C			
Dimensions W x H x D	12 x 69.8 x 100 mm			
Approvals	CE; KC; Marine; OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-501			wago.com/753-501
Accessories				
Pluggable connector		Item No.		
Coding keys		753-110		
		753-150		


Digital Output; 24 VDC



Figure: 750-502



Figure: 753-502

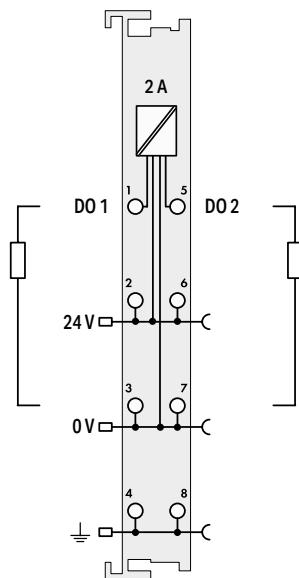

Item Description			
Version	2-Channel Digital Output; 24 VDC; 2.0 A		
Item No.	Standard	Interference-free	Pluggable (delivery without connector)
750-502	750-502/000-800	753-502	753-502/000-800
Order Text	2DO; 24 VDC; 2A	2DO; 24 VDC; 2A; IF	2DO; 24 VDC; 2A
Technical Data			
Pluggable connector			•
Interference-free for use in safety functions	•	•	
Number of digital outputs	2		
Signal type	24 VDC		
Output characteristic	High-side switching		
Output current per channel	2 A; short-circuit-protected		
Load type	Resistive; inductive; lamp load		
Actuator connection	2-wire; 3-wire; 4-wire		
Switching frequency (max.)	2.5 kHz		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption – system supply (5 V)	3.5 mA		
Data width (internal)	2 bits		
Isolation	500 V (system/field)		
Surrounding air temperature (operation)	0 ... +55 °C		
Dimensions W x H x D	12 x 69.8 x 100 mm		
Approvals	CE; UL; Marine; OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-502	wago.com/753-502	
Accessories		Item No.	
Pluggable connector		753-110	
Coding keys		753-150	

“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 519 or www.wago.com



Digital Output; 24 VDC



Figure: 750-506



Figure: 753-506

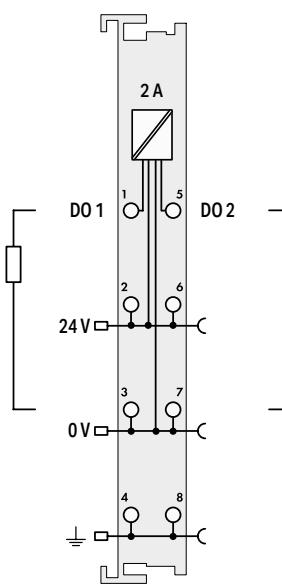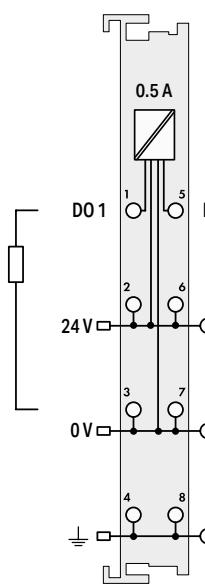

Item Description	2-Channel Digital Output; 24 VDC; 0.5 A; Diagnostics			2-Channel Digital Output; 24 VDC; 2.0 A; Diagnostics		
Version	Standard	Interference-free	Pluggable (delivery without connector)	Standard	Interference-free	Pluggable (delivery without connector)
Item No.	750-506	750-506/000-800	753-506	750-508	750-508/000-800	753-508
Order Text	2DO; 24 VDC; 0.5A; Diagn	2DO; 24 VDC; 0.5A; IF; Diagn	2DO; 24 VDC; 0.5A; Diagn	2DO; 24 VDC; 2A; Diagn	2DO; 24 VDC; 2A; IF; Diagn	2DO; 24 VDC; 2A; Diagn
Technical Data						
Pluggable connector		●			●	
Interference-free for use in safety functions						
Number of digital outputs	2			2		
Signal type	24 VDC			24 VDC		
Output characteristic	High-side switching 0.5 A; short-circuit-protected			High-side switching 2 A; short-circuit-protected		
Output current per channel	Resistive; inductive; lamp load			Resistive; inductive; lamp load		
Load type	2-wire; 3-wire; 4-wire			2-wire; 3-wire; 4-wire		
Actuator connection	5 kHz			1 kHz		
Switching frequency (max.)	Open circuit; short circuit; overload			Open circuit; short circuit; overload		
Diagnostics	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Supply voltage (field)	15 mA			14 mA		
Current consumption – system supply (5 V)	2-bit input; 2-bit output			2-bit input; 2-bit output		
Data width (internal)	500 V (system/field)			500 V (system/field)		
Isolation	0 ... +55 °C			0 ... +55 °C		
Surrounding air temperature (operation)	12 x 69.8 x 100 mm			12 x 69.8 x 100 mm		
Dimensions W x H x D	CE; ; OrdLoc/HazLoc; ATEX/IECEx			CE; ; Marine; OrdLoc/HazLoc; ATEX/IECEx		
Approvals	wago.com/750-506			wago.com/753-506		
Data sheet and further information, see:						
Accessories	Item No.			Item No.		
Pluggable connector	753-110			753-110		
Coding keys	753-150			753-150		


Digital Output; 24 VDC



Figure: 750-504



Figure: 753-504

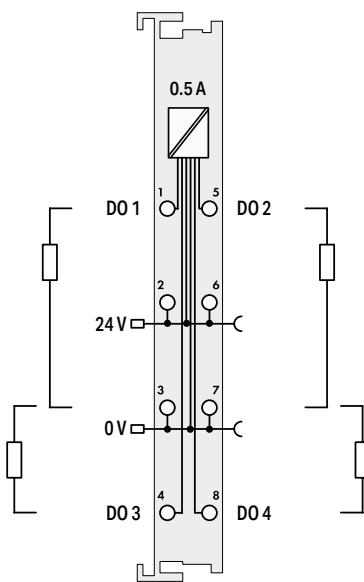

4-Channel Digital Output; 24 VDC; 0.5 A				
Item Description	Standard	Extended temperature	Pluggable (delivery without connector)	Interference-free
Version	750-504	750-504/025-000	753-504	750-504/000-800
Item No.	4DO; 24 VDC; 0.5A	4DO; 24 VDC; 0.5A; T	4DO; 24 VDC; 0.5A	4DO; 24 VDC; 0.5A; IF
Order Text				4DO; 24 VDC; 0.5A; IF; T

Technical Data

Pluggable connector	•	•
Interference-free for use in safety functions		
Number of digital outputs	4	
Signal type	24 VDC	
Output characteristic	High-side switching	
Output current per channel	0.5 A; short-circuit-protected	
Load type	Resistive; inductive; lamp load	
Actuator connection	2 x (2-wire; 3-wire)*	
Switching frequency (max.)	1 kHz	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	10 mA	
Data width (internal)	4 bits	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	0 ... +55 °C
Approvals	CE; UL; Marine; OrdLoc/HazLoc; ATEX/IECEx	-20 ... +60 °C
Data sheet and further information, see:	wago.com/750-504	wago.com/753-504
Accessories		Item No.
Pluggable connector		753-110
Coding keys		753-150

*A suitable field side connection module (e.g., 750-614) must also be used to connect other actuators.

„ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

„ Approvals and corresponding ratings, see page 519 or www.wago.com


Digital Output; 24 VDC



Figure: 750-531



Figure: 753-531

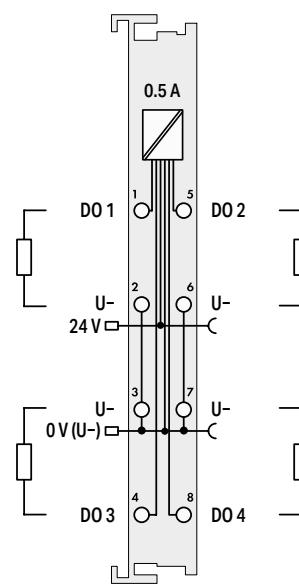

4-Channel Digital Output; 24 VDC; 0.5 A; 2-wire connection			
Standard	Interference-free	Pluggable (delivery without connector)	Pluggable (delivery without connector); Interference-free
750-531	750-531/000-800	753-531	753-531/000-800
4DO; 24 VDC; 0.5A; 2-wire	4DO; 24 VDC; 0.5A; IF; 2-wire	4DO; 24 VDC; 0.5A; 2-wire	4DO; 24 VDC; 0.5A; IF; 2-wire

Technical Data



Pluggable connector	
Interference-free for use in safety functions	
Number of digital outputs	4
Signal type	24 VDC
Output characteristic	High-side switching
Output current per channel	0.5 A; short-circuit-protected
Load type	Resistive; inductive; lamp load
Actuator connection	2-wire
Switching frequency (max.)	1 kHz
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	10 mA
Data width (internal)	4 bits
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-531 wago.com/753-531
Accessories	Item No.
Pluggable connector	753-110
Coding keys	753-150

Digital Output; 24 VDC






Figure: 750-516

Figure: 750-532

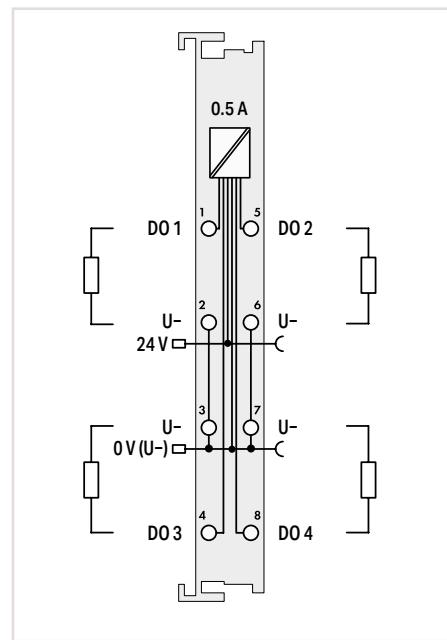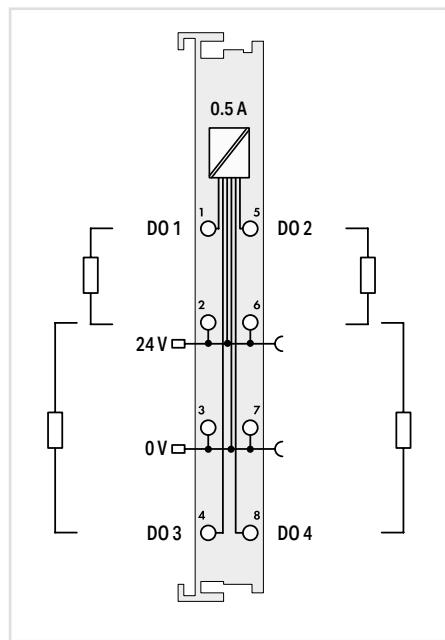

Item Description	4-Channel Digital Output; 24 VDC; 0.5 A; Low-side switching	
Version	Standard	
Item No.	750-516	
Order Text	4DO; 24 VDC; 0.5A; LSS	
Technical Data		
Pluggable connector		
Number of digital outputs	4	
Signal type	24 VDC	
Output characteristic	Low-side switching	
Output current per channel	0.5 A; short-circuit-protected	
Load type	Resistive; inductive; lamp load	
Actuator connection	2 x (2-wire)*	
Switching frequency (max.)	5 kHz	
Diagnostics		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	7 mA	
Data width (internal)	4 bits	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-516	wago.com/753-516
Accessories		
Pluggable connector		
Coding keys		
Item No.	753-110	
	753-150	

*A suitable field side connection module (e.g., 750-614) must also be used to connect other actuators.

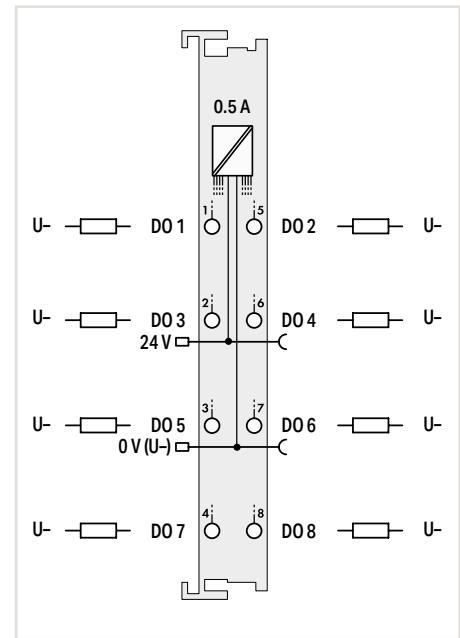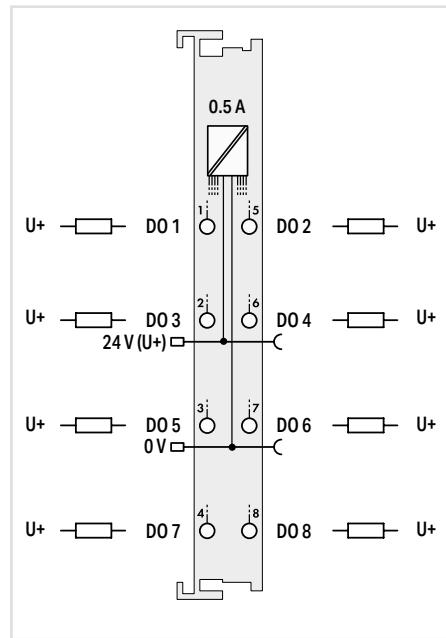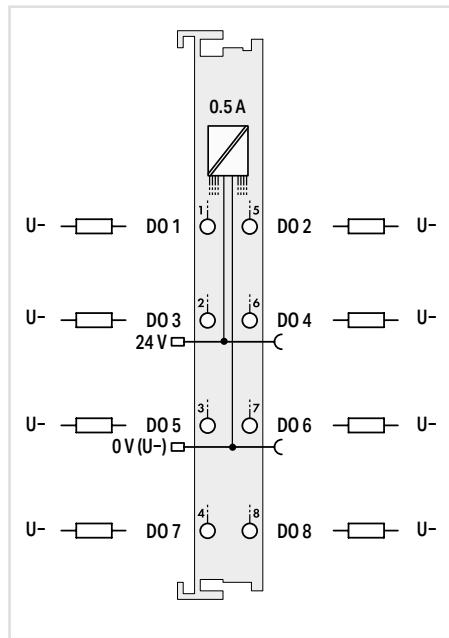

8-Channel Digital Output; 24 VDC; 0.5 A		
Standard	Extended temperature	Pluggable (delivery without connector)
750-530	750-530/025-000	753-530
8DO; 24 VDC; 0.5A; T	8DO; 24 VDC; 0.5A	8DO; 24 VDC; 0.5A

8-Channel Digital Output; 24 VDC; 0.5 A; Low-side switching		
Standard	Pluggable (delivery without connector)	
750-536	753-536	
8DO; 24 VDC; 0.5A; LSS	8DO; 24 VDC; 0.5A; LSS	

8-Channel Digital Output; 24 VDC; 0.5 A; Diagnostics		
Standard	Pluggable (delivery without connector)	
750-537	753-537	
8DO; 24 VDC; 0.5A; Diagn	8DO; 24 VDC; 0.5A; Diagn	

8	•
24 VDC	
High-side switching	
0.5 A; short-circuit-protected	
Resistive; inductive; lamp load	
1-wire	
2 kHz	
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
25 mA	
8 bits	
500 V (system/field)	
0 ... +55 °C	-20 ... +60 °C
12 x 67.8 x 100 mm	12 x 69 x 100 mm
CE; IP65; Marine; ATEX/IECEx	
wago.com/750-530	wago.com/753-530

8	•
24 VDC	
Low-side switching	
0.5 A; short-circuit-protected	
Resistive; inductive; lamp load	
1-wire	
2 kHz	
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
25 mA	
8 bits	
500 V (system/field)	
0 ... +55 °C	
12 x 67.8 x 100 mm	12 x 69 x 100 mm
CE; IP65; Marine; ATEX/IECEx	
wago.com/750-536	wago.com/753-536

8	•
24 VDC	
High-side switching	
0.5 A; short-circuit-protected	
Resistive; inductive; lamp load	
1-wire	
1 kHz	
Open circuit; short circuit; overload	
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
50 mA	
8-bit output; 8-bit input	
500 V (system/field)	
0 ... +55 °C	
12 x 67.8 x 100 mm	12 x 69 x 100 mm
CE; IP65; Marine; ATEX/IECEx	
wago.com/750-537	wago.com/753-537

Item No.
753-110
753-150


Item No.
753-110
753-150

Item No.
753-110
753-150

Digital Output; 24 VDC



Figure: 750-1515

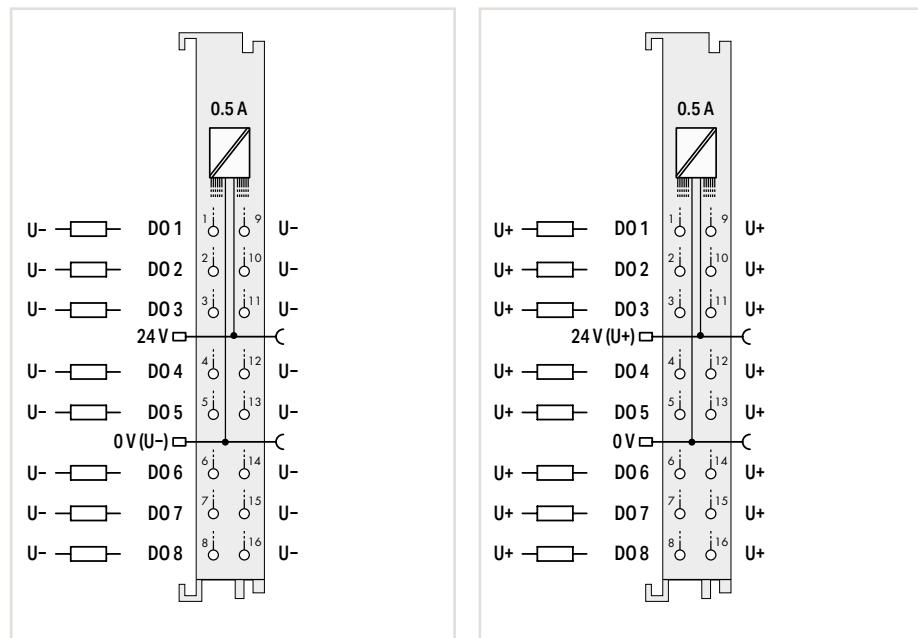

Item Description	8-Channel Digital Output; 24 VDC; 0.5 A; 2-wire connection			
Version	Standard with 16 connectors	8DO; 24 VDC; 0.5A; 2-wire		
Item No.	750-1515	750-1516		
Order Text	8DO; 24 VDC; 0.5A; LSS; 2-wire			
Technical Data				
Number of digital outputs	8	8		
Signal type	24 VDC	24 VDC		
Output characteristic	High-side switching	Low-side switching		
Output current per channel	0.5 A; short-circuit-protected	0.5 A; short-circuit-protected		
Load type	Resistive; inductive; lamp load	Resistive; inductive; lamp load		
Actuator connection	2-wire	2-wire		
Switching frequency (max.)	1 kHz	1 kHz		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			
Current consumption – system supply (5 V)	20 mA	20 mA		
Data width (internal)	8 bits	8 bits		
Isolation	500 V (system/field)	500 V (system/field)		
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C		
Dimensions W x H x D	12 x 69 x 100 mm	12 x 69 x 100 mm		
Approvals	CE; IECEx Marine; OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-1515			

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 519 or www.wago.com


Digital Input/Output; 24 VDC



Figure: 750-1502



Figure: 750-1506

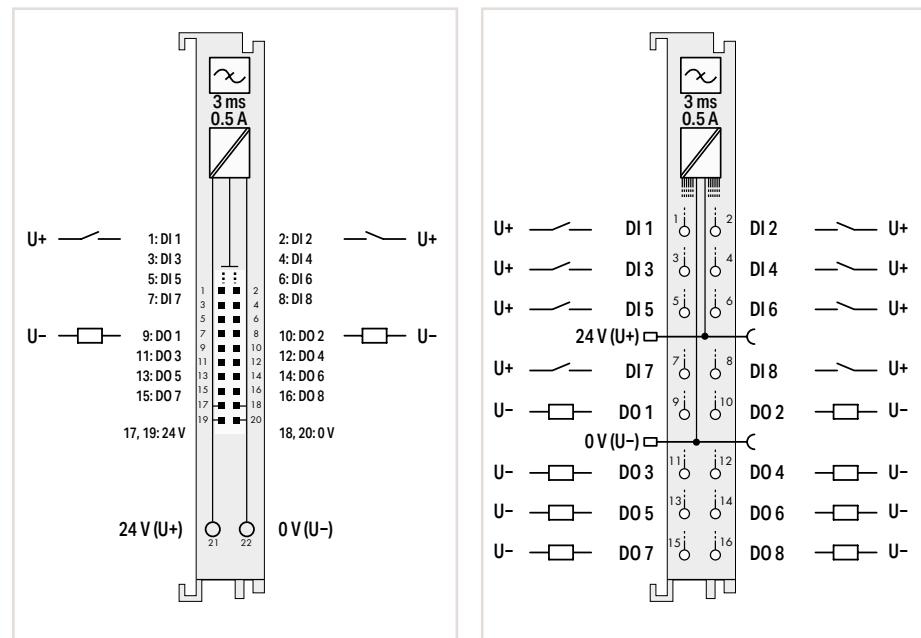

Item Description	8-Channel Digital Input/Output; 24 VDC; 0.5 A; Ribbon cable	
Version	Standard with ribbon cable connector	Standard with 16 connectors
Item No.	750-1502	750-1506
Order Text	8DIO; 24 VDC; 0.5A; Ribbon Cable	8DIO; 24 VDC; 0.5A
Technical Data		
Number of digital inputs	8	8
Signal type	24 VDC	24 VDC
Voltage range for signal (0)	-3 ... +5 VDC	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC	15 ... 30 VDC
Sensor connection	1-wire	1-wire
Input characteristic	High-side switching	High-side switching
Input filter (digital)	3 ms	3 ms
Input current per channel for signal (1) typ.	2.4 mA	2.4 mA
Number of digital outputs	8	8
Output characteristic	High-side switching	High-side switching
Output current per channel	0.5 A; short-circuit-protected	0.5 A; short-circuit-protected
Load type	Resistive; inductive; lamp load	Resistive; inductive; lamp load
Actuator connection	1-wire	1-wire
Switching frequency (max.)	1 kHz	1 kHz
Current consumption, field supply (module with no external load)	16 mA	16 mA
Supply voltage (field)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	30 mA	30 mA
Data width (internal)	8-bit input; 8-bit output	8-bit input; 8-bit output
Isolation	500 V (system/field)	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 74.1 x 100 mm	12 x 69 x 100 mm
Approvals	CE; IECEx; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-1502	
Accessories	Item No.	
Interface modules for system wiring and interface cable	See Section 10	



Digital Output; 24 VDC



Figure: 750-1500



Figure: 750-1504

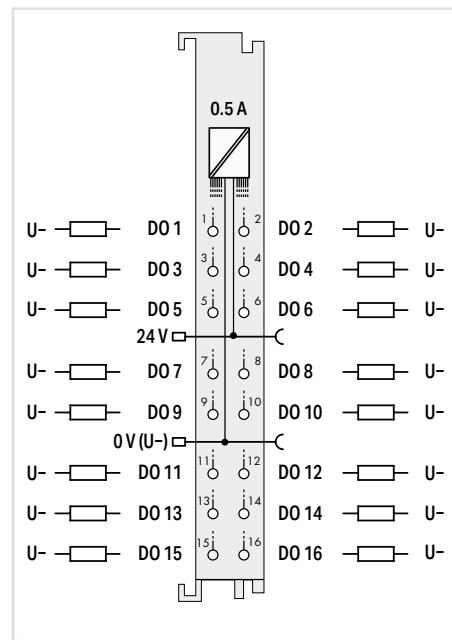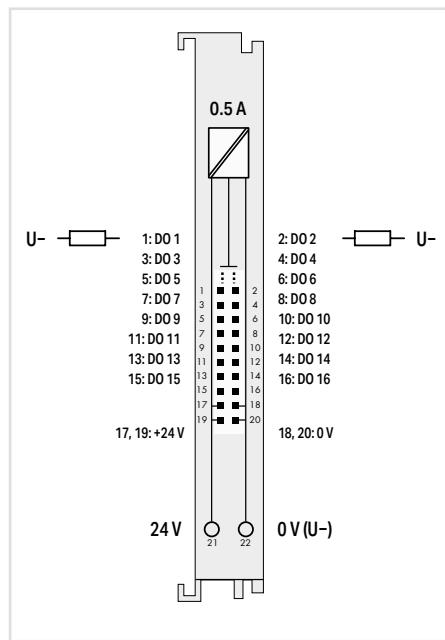

Item Description	16-Channel Digital Output; 24 VDC; 0.5 A; Ribbon cable	16-Channel Digital Output; 24 VDC; 0.5 A
Version	Standard with ribbon cable connector	Standard with 16 connectors
Item No.	750-1500	750-1504
Order Text	16DO; 24 VDC; 0.5A; Ribbon Cable	16DO; 24 VDC; 0.5A
Technical Data		
Number of digital outputs	16	16
Signal type	24 VDC	24 VDC
Output characteristic	High-side switching	High-side switching
Output current per channel	0.5 A; short-circuit-protected	0.5 A; short-circuit-protected
Load type	Resistive; inductive; lamp load	Resistive; inductive; lamp load
Actuator connection	1-wire	1-wire
Switching frequency (max.)	1 kHz	1 kHz
Supply voltage (field)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	40 mA	40 mA
Data width (internal)	16 bits	16 bits
Isolation	500 V (system/field)	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 74.1 x 100 mm	12 x 69 x 100 mm
Approvals	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-1500	wago.com/750-1504
Accessories		
Interface modules for system wiring and interface cable	See Section 10	
Item No.		

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 519 or www.wago.com



Digital Output; 24 VDC



Figure: 750-1501



Figure: 750-1505

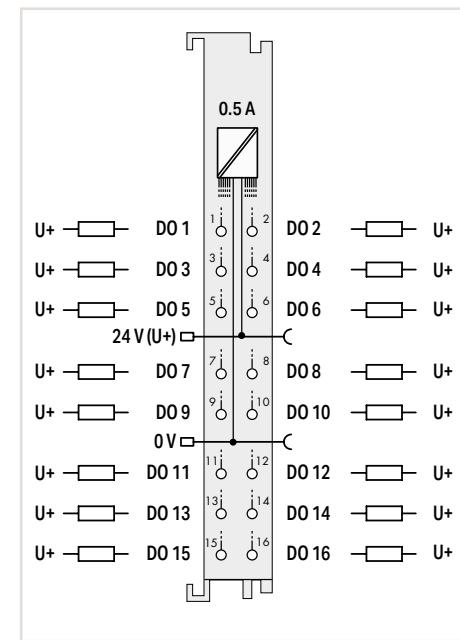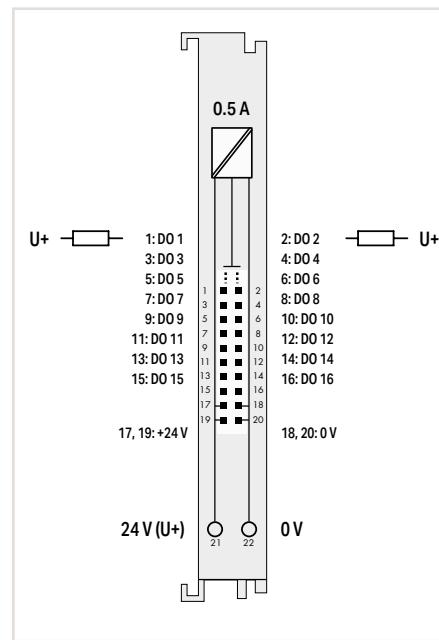

Item Description	16-Channel Digital Output; 24 VDC; 0.5 A; Low-side switching; Ribbon cable	
Version	Standard with ribbon cable connector	
Item No.	750-1501	
Order Text	16DO; 24 VDC; 0.5A; LSS; Ribbon Cable	
Technical Data		
Number of digital outputs	16	16
Signal type	24 VDC	24 VDC
Output characteristic	Low-side switching	Low-side switching
Output current per channel	0.5 A; short-circuit-protected	0.5 A; short-circuit-protected
Load type	Resistive; inductive; lamp load	Resistive; inductive; lamp load
Actuator connection	1-wire	1-wire
Switching frequency (max.)	1 kHz	1 kHz
Supply voltage (field)	24 VDC (-25 ... +30 %); via wiring interface (CAGE CLAMP® connection)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	40 mA	40 mA
Data width (internal)	16 bits	16 bits
Isolation	500 V (system/field)	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 74.1 x 100 mm	12 x 69 x 100 mm
Approvals	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-1501	
Accessories	See Section 10	
	Item No.	



Digital Output; 230 VAC



Figure: 753-540



Figure: 750-509

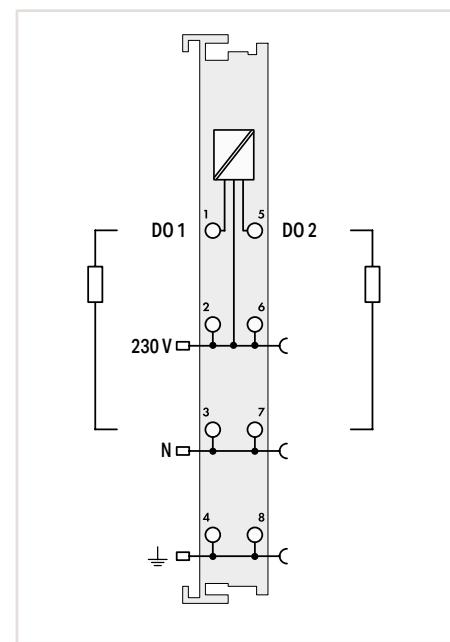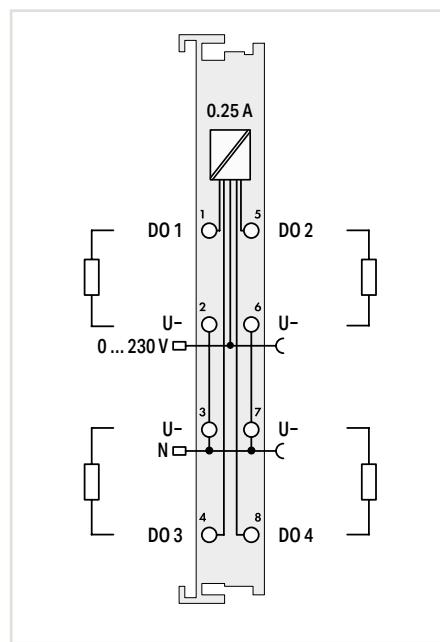

Item Description	4-Channel Digital Output; 230 VAC; 0.25 A; Solid-state	
Version	Pluggable (delivery without connector)	
Item No.	753-540	2-Channel Digital Output; 230 VAC; 0.3 A; Solid-state
Order Text	4DO; 230 VAC; 0.25A; SSR	Standard
	750-509	Pluggable (delivery without connector)
	2DO; 230 VAC; 0.3A; SSR	753-509
	2DO; 230 VAC; 0.3A; SSR	2DO; 230 VAC; 0.3A; SSR

Technical Data

Pluggable connector	●	●
Number of digital outputs	4	2
Signal type	0 ... 250 VAC	0 ... 230 VAC/DC
Output circuit design	High-side switching	Solid-state load relays
Output characteristic	0.25 A; short-circuit-protected	0.3 A
Output current per channel	Resistive; inductive	Resistive; inductive
Load type	2-wire	2-wire; 3-wire; 4-wire
Actuator connection	275 VAC (varistor)	275 VAC (varistor)
Overvoltage protection	max. 10 A (16 ms)	
Short-circuit current		
Switching frequency (max.)		5 Hz (24 V 0.3 A DF = 50 %); 0.5 Hz (230 V 0.3 A DF = 50 %)

Supply voltage (field) 230 VAC; via power jumper contacts (power supply via blade contact; transmission via spring contact) 250 V AC/DC; via power jumper contacts (power supply via blade contact; transmission via spring contact)

Current consumption – system supply (5 V)	18 mA	10 mA
Data width (internal)	4 bits	2 bits
Isolation	1500 V (system/field)	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm

Approvals CE; IECEx; ATEX; OrdLoc/HazLoc; ATEX/IECEx; Marine; OrdLoc/HazLoc; ATEX/IECEx

Data sheet and further information, see: wago.com/753-540 wago.com/750-509 wago.com/753-509

Accessories	Item No.	Item No.
Pluggable connector	753-110	753-110
Coding keys	753-150	753-150

Notice:
An additional supply module must be added for 0–250 VAC supply!

Notice:
An additional supply module must be added for 0–230 VAC/DC supply!

- “ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"
- “ Approvals and corresponding ratings, see page 519 or www.wago.com


Relay Output; 125 VAC



Figure: 750-514



Figure: 753-514

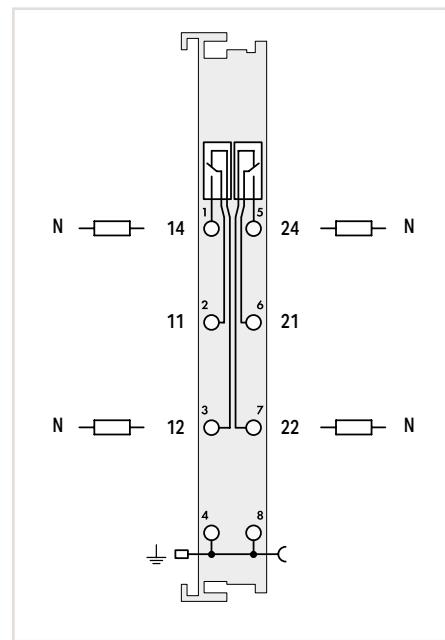

Item Description	2-Channel Relay Output; 125 VAC; 0.5 A; Potential-free; Relay with 2 changeover contacts	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-514	753-514
Order Text	2RO; 125 VAC; 0.5A; Pot-free; Relay2CO	

Technical Data

Pluggable connector	●
Number of digital outputs	2
Switching voltage (max.)	125 VAC; 30 VDC
Output circuit design	Relay with 2 changeover contacts
Output characteristic	Potential-free
Switching current (max.)	0.5 A for AC; 1 A for DC
Switching current (min.)	0.01 mA / 10 mV (DC)
Actuator connection	1-wire
Switching frequency (max.)	0.33 Hz
Mechanical switching operations (min.)	100 x 10 ⁶
Electrical switching operations (min.)	1 x 10 ⁵
Supply voltage (field)	Transmission of ground potential via power jumper contact
Current consumption – system supply (5 V)	70 mA
Data width (internal)	2 bits
Isolation	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; IEC Marine; UL OrdLoc
Data sheet and further information, see:	wago.com/750-514 wago.com/753-514

Accessories	Item No.
Pluggable connector	753-110
Coding keys	753-150



Relay Output; 250 VAC



Figure: 750-517



Figure: 750-512

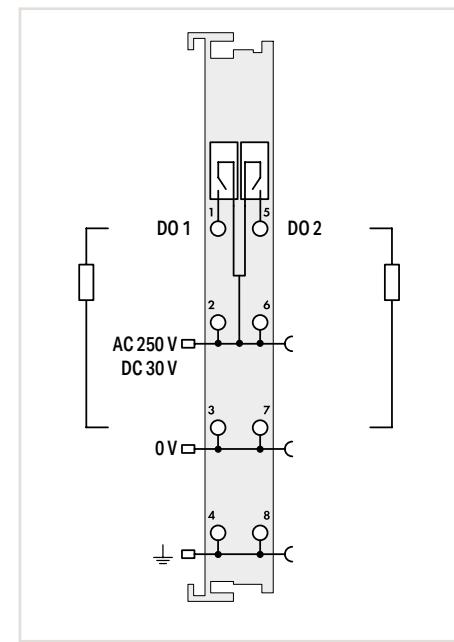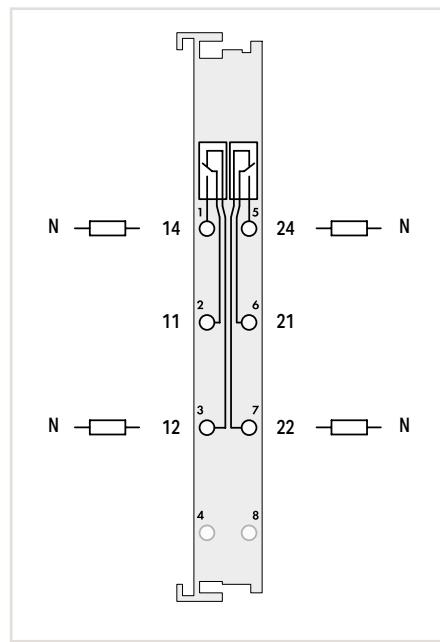

Item Description	2-Channel Relay Output; 250 VAC; 1 A; Potential-free; Relay with 2 changeover contacts	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-517	753-517
Order Text	2RO; 250 VAC; 1A; Pot-free; Relay2CO	

Item Description	2-Channel Relay Output; 250 VAC; 2 A; Relay with 2 make contacts	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-512	753-512
Order Text	2RO; 250 VAC; 2A; Relay2NO	

Technical Data		
Pluggable connector		•
Number of digital outputs	2	
Switching voltage (max.)	250 VAC; 300 VDC	
Output circuit design	Relay with 2 changeover contacts	
Output characteristic	Potential-free	
Switching current (max.)	1 A at 250 VAC / 40 VDC; 0.15 A at 300 VDC	
Switching current (min.)	100 mA (12 VDC)	
Actuator connection	1-wire	
Switching frequency (max.)	0.1 Hz	
Mechanical switching operations (min.)	5 x 10 ⁶	
Electrical switching operations (min.)	10 x 10 ⁵	
Supply voltage (field)		

Technical Data		
Pluggable connector		•
Number of digital outputs	2	
Switching voltage (max.)	250 VAC; 30 VDC	
Output circuit design	Relay with 2 make contacts	
Output characteristic	Non-floating	
Switching current (max.)	2 A	
Switching current (min.)	10 mA / 5 VDC	
Actuator connection	2-wire; 3-wire	
Switching frequency (max.)	0.5 Hz	
Mechanical switching operations (min.)	20 x 10 ⁶	
Electrical switching operations (min.)	3 x 10 ⁵	
Supply voltage (field)	250 VAC; via power jumper contacts (power supply via blade contact; transmission via spring contact)	

Current consumption – system supply (5 V)	90 mA
Data width (internal)	2 bits
Isolation	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm

Current consumption – system supply (5 V)	100 mA
Data width (internal)	2 bits
Isolation	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm

Approvals	CE; UL; Marine; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-517 wago.com/753-517

Approvals	CE; UL; Marine; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-512 wago.com/753-512

Accessories	
Pluggable connector	753-110
Coding keys	753-150

Accessories	
Pluggable connector	753-110
Coding keys	753-150

Notice:

An additional supply module must be added for 0–250 VAC/0–30 VDC supply!

- “ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"
- “ Approvals and corresponding ratings, see page 519 or www.wago.com



Relay Output; 250 VAC



Figure: 750-513




Figure: 750-513/000-001

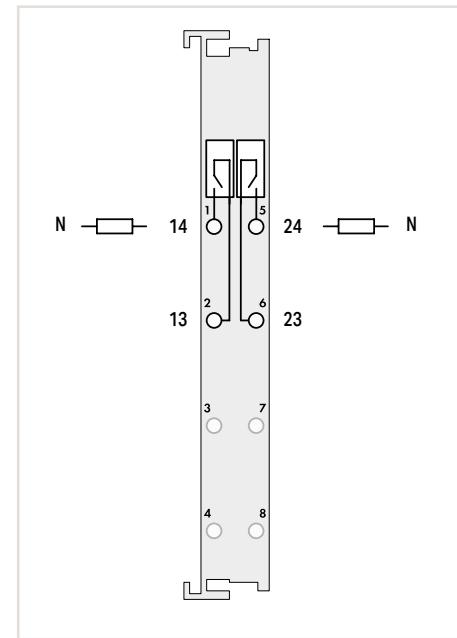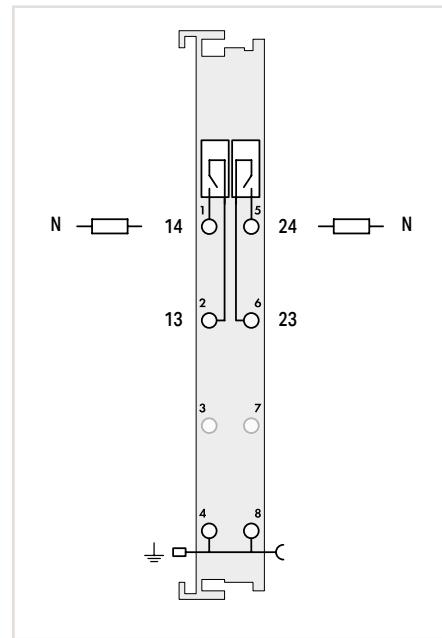

Item Description	2-Channel Relay Output; 250 VAC; 2 A; Potential-free; Relay with 2 make contacts	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-513	753-513
Order Text	2RO; 250 VAC; 2A; Pot-free; Relay2NO	2RO; 250 VAC; 2A; Pot-free; Relay2NO
Technical Data		
Pluggable connector	●	●
Number of digital outputs	2	2
Switching voltage (max.)	250 VAC; 30 VDC	250 VAC; 30 VDC
Output circuit design	Relay with 2 make contacts	Relay with 2 make contacts
Output characteristic	Potential-free	Potential-free
Switching current (max.)	2 A	2 A
Switching current (min.)	10 mA / 5 VDC	10 mA / 5 VDC
Actuator connection	1-wire	1-wire
Switching frequency (max.)	0.5 Hz	0.5 Hz
Mechanical switching operations (min.)	20 x 10 ⁶	20 x 10 ⁶
Electrical switching operations (min.)	3 x 10 ⁵	3 x 10 ⁵
Supply voltage (field)	Transmission of ground potential via power jumper contact	
Current consumption – system supply (5 V)	100 mA	100 mA
Data width (internal)	2 bits	2 bits
Isolation	1500 V (system/field)	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-513	wago.com/753-513
Accessories	Item No.	Item No.
Pluggable connector	753-110	753-110
Coding keys	753-150	753-150

Relay Output; 250 VAC


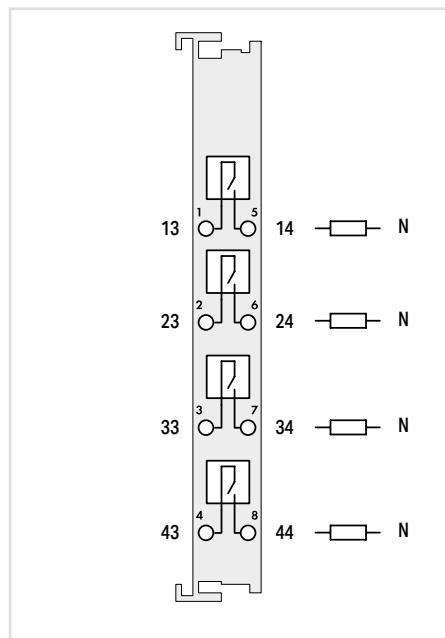


Item Description	4-Channel Relay Output; 250 VAC; 2 A; Potential-free; Relay with 4 make contacts
Version	Standard
Item No.	750-515
Order Text	4RO; 250 VAC; 2A; Pot-free; Relay4NO
Technical Data	
Number of digital outputs	4
Switching voltage (max.)	250 VAC; 30 VDC; 110 VDC at 0.4 A
Output circuit design	Relay with 4 make contacts
Output characteristic	Potential-free
Switching current (max.)	2 A (5 A for single-channel use)
Switching current (min.)	1 mA / 5 VDC
Actuator connection	1-wire
Switching frequency (max.)	0.33 Hz; 0.1 Hz at 5 A
Mechanical switching operations (min.)	20×10^6
Electrical switching operations (min.)	1×10^5
Current consumption – system supply (5 V)	95 mA
Data width (internal)	4 bits
Isolation	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm
Approvals	CE; IP65; Marine; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-515

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 519 or www.wago.com

Relay Output; 250 VAC

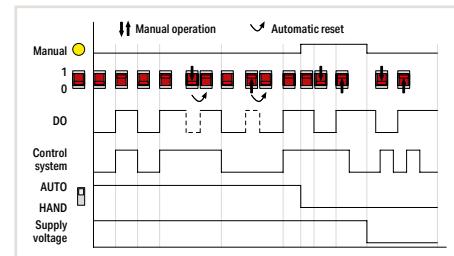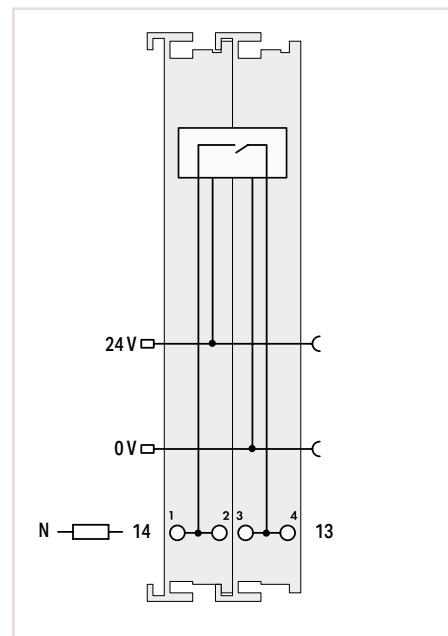

Item Description	1-Channel Relay Output; 230 VAC; 16 A; Potential-free; Relay with 1 make contacts
Version	
Item No.	750-523
Order Text	1RO; 230 VAC; 16A; Pot-free; Relay1NO
Technical Data	
Number of digital outputs	1
Switching voltage (max.)	440 VAC
Output circuit design	Relay with 1 make contact
Output characteristic	Potential-free
Switching current	16 A
Actuator connection	1-wire
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	5 mA
Data width (internal)	2-bit input; 2-bit output
Isolation	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 67.8 x 100 mm
Approvals	CE; IEC Marine; OrdLoc
Data sheet and further information, see:	wago.com/750-523

Item Description	1-Channel Relay Output; 230 VAC; 16 A; Potential-free; Relay with 1 make contacts
Version	
Item No.	750-523
Order Text	1RO; 230 VAC; 16A; Pot-free; Relay1NO
Technical Data	
Number of digital outputs	1
Switching voltage (max.)	440 VAC
Output circuit design	Relay with 1 make contact
Output characteristic	Potential-free
Switching current	16 A
Actuator connection	1-wire
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	5 mA
Data width (internal)	2-bit input; 2-bit output
Isolation	1500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 67.8 x 100 mm
Approvals	CE; IEC Marine; OrdLoc
Data sheet and further information, see:	wago.com/750-523

This relay output module switches a connected actuator or load.

The 24 VDC supply is derived from the power jumper contacts to trigger the relays.

The switched status of the relay is shown by the manual switch (1/0). The operating mode can be set using a manual/automatic selector switch. The mode status is indicated by an LED and via status bits in the process image.

Manual: Coil triggering is interrupted. Actuation only via the red manual operating switches.
Auto: The relay is operated via the control system; manual status transitions via the manual switch are reset by the control system after less than 500 ms.

The manual switch can also be used without 24 V supply to switch the output ON.

The relay meets both international standards of IEC and DIN EN 61810 part 1 /VDE 0435 part 201, as well as overload and short circuit requirements of IEC and DIN EN 61036 /61037.

Analog Input Modules



Housing design (750 Series)


Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 67.8 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 60.6 mm
Connection technology	CAGE CLAMP®
Conductor range	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

Housing design (753 Series)

Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 69 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 61.8 mm
Connection technology	CAGE CLAMP®
Conductor range	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	9 ... 10 mm / 0.37 inch

Housing design (750 Series), double width

Dimensions W x H x D	24 x 67.8 x 100 mm
Height from upper-edge of DIN-rail	60.6 mm

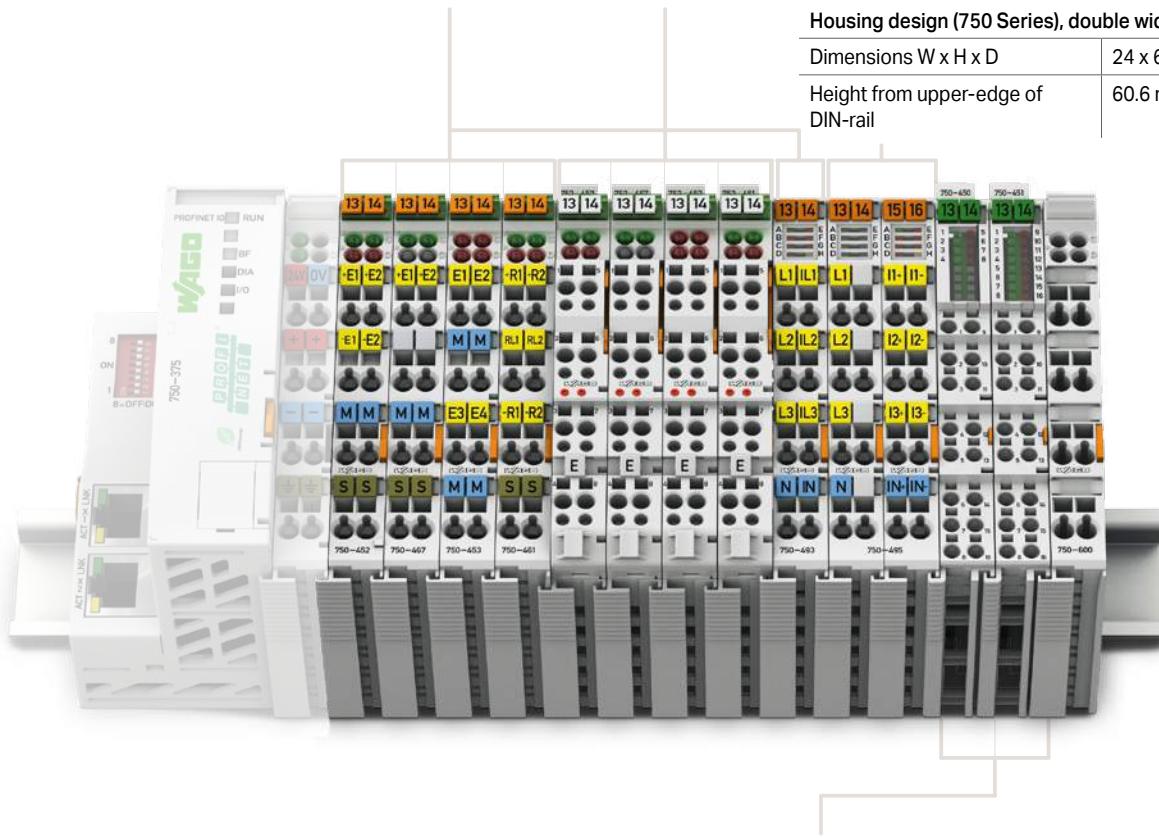

Housing design (750 Series), with Push-in CAGE CLAMP® connections (up to 16 connection points)

Dimensions W x H x D	12 x 69 x 100 mm
Height from upper-edge of DIN-rail	61.8 mm
Connection technology	Push-in CAGE CLAMP®
Conductor range	Solid: 0.08 ... 1.5 mm² / 28 ... 16 AWG Fine-stranded: 0.25-1.5 mm² / 22-16 AWG;
Strip length	8 ... 9 mm / 0.33 inch



I/O System –
750 XTR Series



I/O-System – 750 and 753 Series; Analog Input Modules

Contents

Function	1-Channel AI	2-Channel AI	4-Channel AI	8-Channel AI	Description	Item Number				Page				
						Standard	/S5 or /S7 Customized Data Format	Extended Temperature	Pluggable					
0 ... 20 mA					2-Channel Analog Input; 0 ... 20 mA; Differential Input	750-452	750-452/000-200		753-452	214				
					2-Channel Analog Input; 0 ... 20 mA; Differential Input	750-480			753-480	214				
					2-Channel Analog Input; 0 ... 20 mA; Single-ended	750-465		750-465/025-000	753-465	215				
					2-Channel Analog Input; 0 ... 20 mA; Single-ended	750-470				215				
					2-Channel Analog Input; 0 ... 20 mA; Single-ended; 60 Hz	750-470/005-000								
					2-Channel Analog Input; 0 ... 20 mA; Single-ended; 16 bits	750-472			753-472	216				
					2-Channel Analog Input; 0 ... 20 mA; Single-ended; 16 bits; 60 Hz	750-472/005-000								
					4-Channel Analog Input; 0 ... 20 mA; Single-ended	750-453*			753-453	216				
4 ... 20 mA					2-Channel Analog Input; 4 ... 20 mA; Differential input	750-454	750-454/000-200	750-454/025-000	753-454	217				
					2-Channel Analog Input; 4 ... 20 mA; Differential input; Extended measurement range	750-454/000-003	750-454/025-003							
					2-Channel Analog Input; 4 ... 20 mA; Differential input	750-492*			753-492	218				
					2-Channel Analog Input; 4 ... 20 mA; Single-ended	750-466	750-466/000-200	750-466/025-000	753-466	219				
					2-Channel Analog Input; 4 ... 20 mA; Single-ended	750-473	750-473/005-000			220				
					2-Channel Analog Input; 4 ... 20 mA; Single-ended; 60 Hz	750-473/005-000								
					2-Channel Analog Input; 4 ... 20 mA; Single-ended; 16 bits	750-474	750-474/000-200		753-474	221				
					2-Channel Analog Input; 4 ... 20 mA; Single-ended; 16 bits; 60 Hz	750-474/005-000								
					2-Channel Analog Input; 4 ... 20 mA HART	750-482	750-482/000-001	750-482/000-300	750-482/025-000	753-482	222			
					4-Channel Analog Input; 4 ... 20 mA; Single-ended	750-455*		750-455/025-000	753-455	223				
					4-Channel Analog Input; 4 ... 20 mA; Single-ended; 4 x 24 V	750-455/020-000				223				
0/4 ... 20 mA					8-Channel Analog Input; 0/4 ... 20 mA; Single-ended	750-496				224				
0 ... 1 A					2-Channel Analog Input; 0 ... 1 VAC/DC; Differential input	750-475			753-475	225				
0 ... 5 A					2-Channel Analog Input; 0 ... 5 VAC/DC; Differential input	750-475/020-000				225				
±10 V					2-Channel Analog Input; ±10 VDC; Differential input	750-456	750-456/000-200		753-456	226				
					2-Channel Analog Input; ±10 VDC; Differential input	750-479	750-479/000-001		753-479	226				
					2-Channel Analog Input; ±10 VDC; Differential input; Synchronous	750-479/000-001								
					2-Channel Analog Input; ±10 VDC; Single-ended; 16 bits	750-476	750-476/000-200		753-476	227				
					4-Channel Analog Input; ±10 VDC; Single-ended	750-457*		750-457/025-000	753-457	227				
0 ... 10 V					2-Channel Analog Input; 0 ... 10 VDC; Single-ended	750-467			753-467	228				
					2-Channel Analog Input; 0 ... 10 VDC; Single-ended; 16 bits	750-478	750-478/005-000		753-478	228				
					2-Channel Analog Input; 0 ... 10 VDC; Single-ended; 16 bits; 60 Hz	750-478/005-000								
					4-Channel Analog Input; 0 ... 10 VDC; Single-ended	750-468*		750-468/025-000		229				
					4-Channel Analog Input; 0 ... 10 VDC; Single-ended	750-459			753-459	229				
0 ... 10 V/±10 V					8-Channel Analog Input; 0 ... 10 VDC/±10 V; Single-ended	750-497				230				
0 ... 10 VAC/DC					2-Channel Analog Input; 0 ... 10 VAC/DC; Differential input	750-477			753-477	231				
0 ... 30 V					2-Channel Analog Input; 0 ... 30 VDC; Differential input	750-483*			753-483	231				
Voltage/Current					4-Channel Analog Input; for voltage/current	750-471				232				
Resistance Sensors					2-Channel Analog Input; for Pt100/RTD resistance sensors	750-461	750-461/000-200	750-461/025-000	753-461	234				
					2-Channel Analog Input; for Pt100/RTD resistance sensors; Adjustable	750-461/003-000			753-461/003-000	234				
					2-Channel Analog Input; for NTC 20k resistance sensors	750-461/020-000				235				
					2/4-Channel Analog Input; Resistance measurement; Adjustable	750-464*				236				
					4-Channel Analog Input; for NTC resistance sensors; Adjustable	750-464/020-000				236				
					4-Channel Analog Input; Resistance measurement; Measurement range: -30 °C ... +150 °C	750-463				237				
					4-Channel Analog Input; Resistance measurement; Adjustable	750-450				237				
					8-Channel Analog Input; Resistance measurement; Adjustable	750-451		750-451/025-000		237				
Thermocouples					2-Channel Analog Input; Thermocouple K; Diagnostics	750-469	750-469/000-200		753-469	238				
					2-Channel Analog Input; Thermocouple K; Diagnostics; Adjustable	750-469/003-000*			753-469/003-000	238				
					2-Channel Analog Input; Thermocouple J; Diagnostics	750-469/000-006				239				
					8-Channel Analog Input; Thermocouple; Adjustable	750-458				239				
Analog Specialty Functions					1-Channel Analog Input; Resistor bridges (strain gauge)	750-491				240				
					1-Channel Analog Input; Resistor bridges (strain gauge); 125 ms conversion time	750-491/000-001								
					3-Phase Power Measurement; 480 VAC 1 A	750-493		750-493/025-000		241				
					3-Phase Power Measurement; 480 VAC 5 A	750-493/000-001								
					3-Phase Power Measurement; 480 VAC 1 A	750-494		750-494/025-000		242				
					3-Phase Power Measurement; 480 VAC 5 A	750-494/000-001		750-494/025-001						
					Power Measurement; 277 VAC/DC; External shunts	750-494/000-005				243				
					3-Phase Power Measurement; 690 VAC 1 A	750-495*				244				
					3-Phase Power Measurement; 690 VAC 5 A	750-495/000-001*								
					3-Phase Power Measurement; 690 VAC Rogowski coils	750-495/000-002*								
Ex i						See Section 5.9								
*This module is also available as a 750 XTR Series variant.						See Section 6								



Analog Input; 0 ... 20 mA; Differential Input

5.4



Figure: 750-452

Figure: 750-480

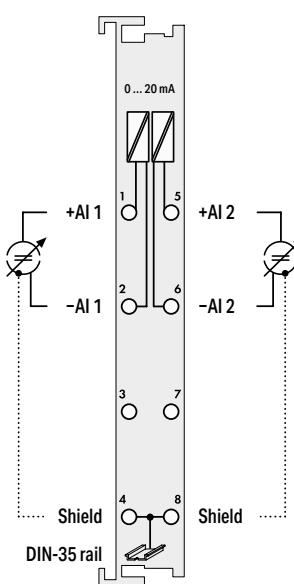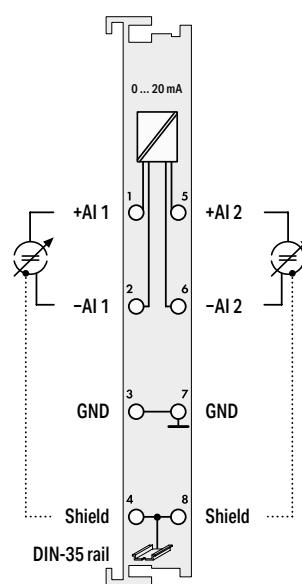

Item Description			
2-Channel Analog Input; 0 ... 20 mA; Differential input			
Version	Standard	Data format (S5 control)	Pluggable (delivery without connector)
750-452	750-452/000-200	753-452	
Order Text	2AI; 0-20mA; Diff	2AI; 0-20mA; Diff; S5	2AI; 0-20mA; Diff

Technical Data

Extended functionality			
Pluggable connector		●	●
Customized data format for S5 control*		●	
Number of analog inputs	2		
Signal type	0 ... 20 mA		
Signal characteristic	Differential		
Resolution	12 bits		
Conversion time	2 ms		
Input resistance	< 220 Ω / 20 mA		
Input filter (analog)			
Measuring error (max.) at 25 °C	±0.2 % of the upper-range value		
Temperature error (max.)	±0.01 % of the upper-range value		
Current consumption – system supply (5 V)	70 mA		
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)		
Isolation	500 V (system/field)		
Surrounding air temperature (operation)	0 ... +55 °C		
Dimensions W x H x D	12 x 69.8 x 100 mm		
Approvals	CE; UL; Marine; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-452	wago.com/753-452	wago.com/750-480 wago.com/753-480
Accessories	Item No.		
Pluggable connector	753-110	Item No.	
Coding keys	753-150	Item No.	
	753-110	753-110	
	753-150	753-150	

*The S5 format allows you to import data with the standard S5 FB 250 function block.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 520 or www.wago.com



Analog Input; 0 ... 20 mA; Single-Ended



Figure: 750-465



Figure: 750-470

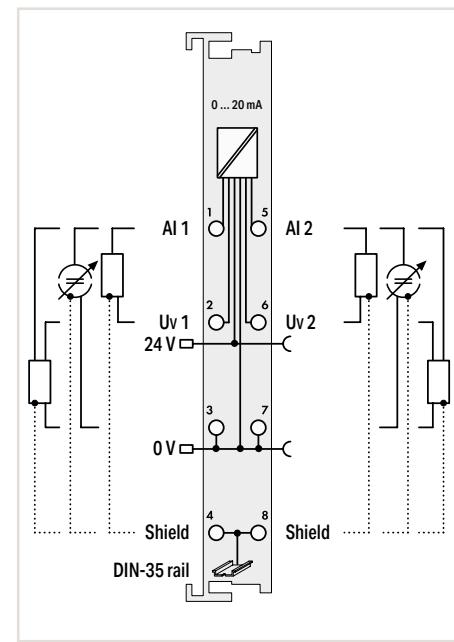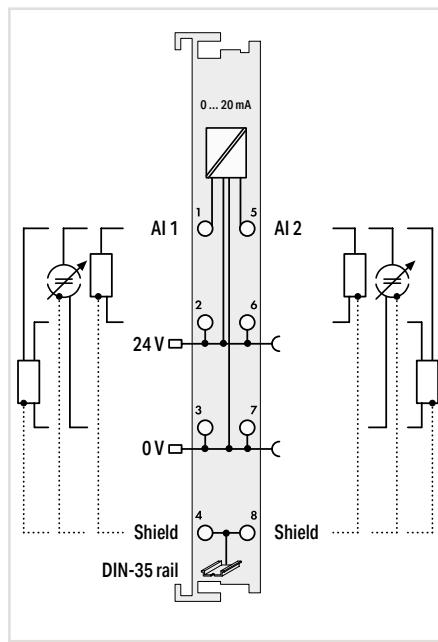

5.4

Item Description	2-Channel Analog Input; 0 ... 20 mA; Single-ended			2-Channel Analog Input; 0 ... 20 mA; Single-ended; Short-circuit-protected sensor supply	
Version	Standard			Standard	
Item No.	750-465	750-465/025-000	753-465	750-470	750-470/005-000
Order Text	2AI; 0-20mA; SE	2AI; 0-20mA; SE; T	2AI; 0-20mA; SE	2AI; 0-20mA; SE	2AI; 0-20mA; SE; 60Hz



Technical Data				Short-circuit-protected sensor supply	
Extended functionality					
Pluggable connector					
Number of analog inputs		2		2	
Signal type		0 ... 20 mA		0 ... 20 mA	
Signal characteristic		Single-ended		Single-ended	
Resolution		12 bits		12 bits	
Conversion time		2 ms		80 ms	
Input resistance		< 220 Ω / 20 mA		< 160 Ω / 20 mA	
Input filter (analog)		±0.2 % of the upper-range value		50 Hz	60 Hz
Measuring error (max.) at 25 °C		±0.01 % of the upper-range value		±0.1 % of the upper-range value	
Temperature error (max.)		±0.01 % of the upper-range value		±0.01 % of the upper-range value	
Supply voltage (field)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)		75 mA		100 mA	
Data width		2 x 16-bit data; 2 x 8-bit control/status (optional)		2 x 16-bit data; 2 x 8-bit control/status (optional)	
Isolation		500 V (system/field)		500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm			12 x 69.8 x 100 mm	
Approvals	CE; UL; CSA; OrdLoc/HazLoc; ATEX/IECEx			CE; UL; CSA; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-465		wago.com/753-465	wago.com/750-470	
Accessories					
Pluggable connector	753-110				
Coding keys	753-150				

Analog Input; 0 ... 20 mA; Single-Ended

5.4



Figure: 750-453

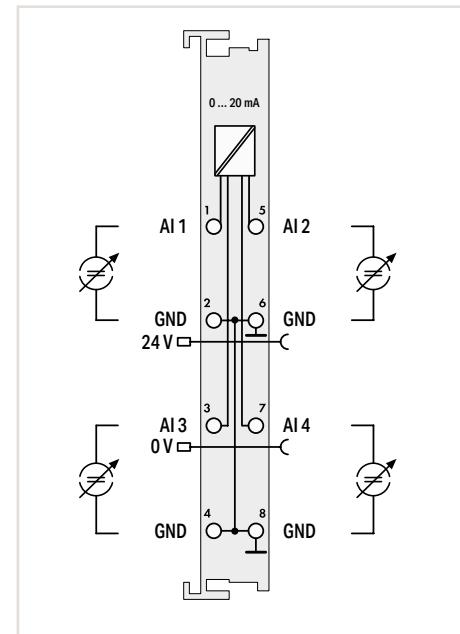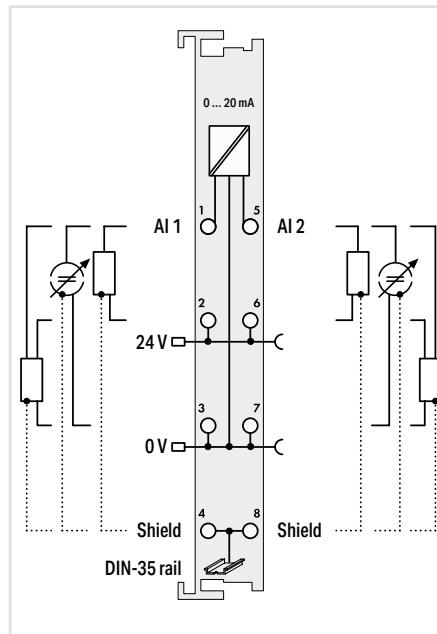

Item Description
Version
Item No.
Order Text

2-Channel Analog Input; 0 ... 20 mA; Single-ended; 16 bits		
Standard	60 Hz	Pluggable (delivery without connector)
750-472	750-472/005-000	753-472

4-Channel Analog Input; 0 ... 20 mA; Single-ended	
Standard	Pluggable (delivery without connector)
750-453	753-453

Technical Data

Extended functionality	Overload protection		
Pluggable connector	•		
Number of analog inputs	2		
Signal type	0 ... 20 mA		
Signal characteristic	Single-ended		
Resolution	15 bits		
Conversion time	80 ms		
Input resistance	220 Ω / 20 mA		
Input filter (analog)	50 Hz	60 Hz	50 Hz
Measuring error (max.) at 25 °C	±0.1 % of the upper-range value		
Temperature error (max.)	±0.01 % of the upper-range value		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption – system supply (5 V)	75 mA		
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)		
Isolation	500 V (system/field)		
Surrounding air temperature (operation)	0 ... +55 °C		
Dimensions W x H x D	12 x 69.8 x 100 mm		
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-472	wago.com/753-472	wago.com/750-453 wago.com/753-453
Accessories	Item No.		
Pluggable connector	753-110		
Coding keys	753-150		

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 520 or www.wago.com


Analog Input; 4 ... 20 mA; Differential Input



Figure: 750-454



Figure: 753-454

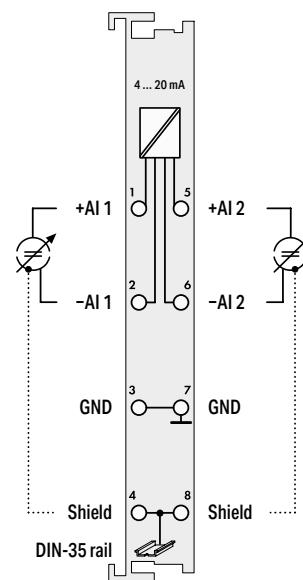

Item Description		2-Channel Analog Input; 4 ... 20 mA; Differential input					
Version		Standard	Extended temperature	Pluggable (delivery without connector)	Data format (S5 control)	Extended measurement range	Extended temperature; Extended measurement range
Item No.	750-454	750-454/025-000	753-454	750-454/000-200	750-454/000-003	750-454/025-003	750-454/025-003
Order Text	2AI; 4-20mA; Diff	2AI; 4-20mA; Diff; T	2AI; 4-20mA; Diff	2AI; 4-20mA; Diff; S5	2AI; 4-20mA; Diff; EM	2AI; 4-20mA; Diff; T; EM	2AI; 4-20mA; Diff; T; EM
Technical Data							
Pluggable connector				●			
Customized data format for S5 control*					●		
Number of analog inputs					2		
Signal type	4 ... 20 mA						3.8 ... 20.5 mA
Signal characteristic	Differential						
Resolution	12 bits						
Conversion time	2 ms						
Input resistance	< 220 Ω / 20 mA						
Measuring error (max.) at 25 °C	±0.2 % of the upper-range value						
Temperature error (max.)	±0.01 % of the upper-range value						
Current consumption – system supply (5 V)	70 mA						
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)						
Isolation	500 V (system/field)						
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C		0 ... +55 °C		-20 ... +60 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm						
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx						
Data sheet and further information, see:	wago.com/750-454	wago.com/753-454		wago.com/750-454			
Accessories		Item No.					
Pluggable connector				753-110			
Coding keys				753-150			

*The S5 format allows you to import data with the standard S5 FB 250 function block.

Analog Input; 4 ... 20 mA; Differential Input


5.4



Figure: 750-492



Figure: 753-492

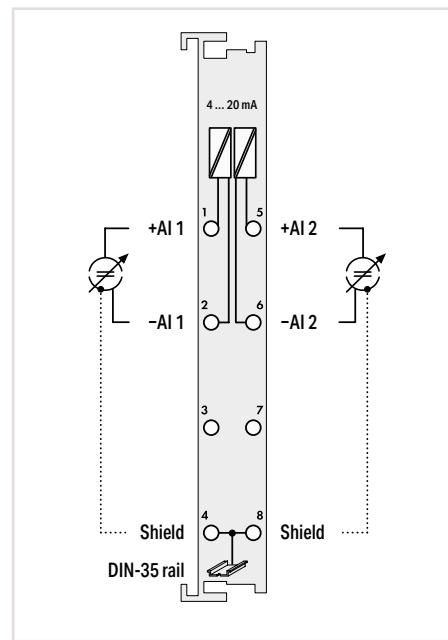

Item Description	2-Channel Analog Input; 4 ... 20 mA; Differential input	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-492	753-492
Order Text	2AI; 4-20mA; Diff	2AI; 4-20mA; Diff

Technical Data

Extended functionality	Time-synchronized measured value acquisition within the module
Pluggable connector	●
Number of analog inputs	2
Signal type	4 ... 20 mA
Signal characteristic	Differential
Resolution	13 bits
Conversion time	1 ms
Input resistance	< 270 Ω / 20 mA
Measuring error (max.) at 25 °C	±0.05 % of the upper-range value
Temperature error	±0.01 % of the upper-range value
Current consumption – system supply (5 V)	80 mA
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)
Isolation	500 V (system/field or channel/channel)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; IECEx; ATEX; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-492 wago.com/753-492

Accessories	Item No.
Pluggable connector	753-110
Coding keys	753-150

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 520 or www.wago.com


Analog Input; 4 ... 20 mA; Single-Ended



Figure: 750-466



Figure: 753-466

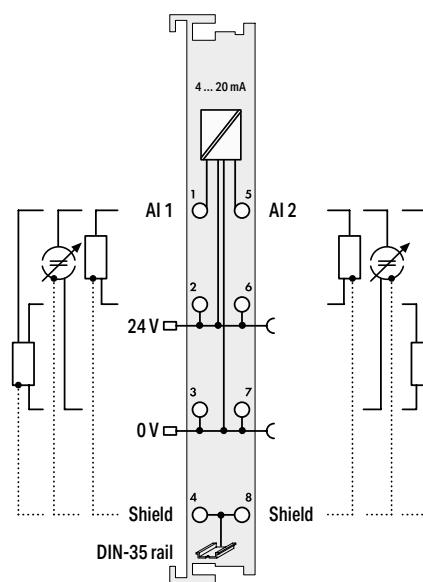

2-Channel Analog Input; 4 ... 20 mA; Single-ended				
Standard	Extended temperature	Pluggable (delivery without connector)	Data format (S5 control)	Extended measurement range
750-466	750-466/025-000	753-466	750-466/000-200	750-466/000-003
2AI; 4-20mA; SE	2AI; 4-20mA; SE; T	2AI; 4-20mA; SE	2AI; 4-20mA; SE; S5	2AI; 4-20mA; SE; EM

Technical Data

Pluggable connector	●	●
Customized data format for S5 control*		
Number of analog inputs	2	
Signal type	4 ... 20 mA	3.8 ... 20.5 mA
Signal characteristic	Single-ended	
Resolution	12 bits	
Conversion time	2 ms	
Input resistance	< 220 Ω / 20 mA	
Measuring error (max.) at 25 °C	±0.2 % of the upper-range value	
Temperature error (max.)	±0.01 % of the upper-range value	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	75 mA	
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	

Approvals

CE; UL; OrdLoc/HazLoc; ATEX/IECEx

Data sheet and further information, see:

wago.com/750-466wago.com/753-466wago.com/750-466

Accessories

Pluggable connector

Item No.

Coding keys


753-110

753-150

*The S5 format allows you to import data with the standard S5 FB 250 function block.

Analog Input; 4 ... 20 mA; Single-Ended

5.4

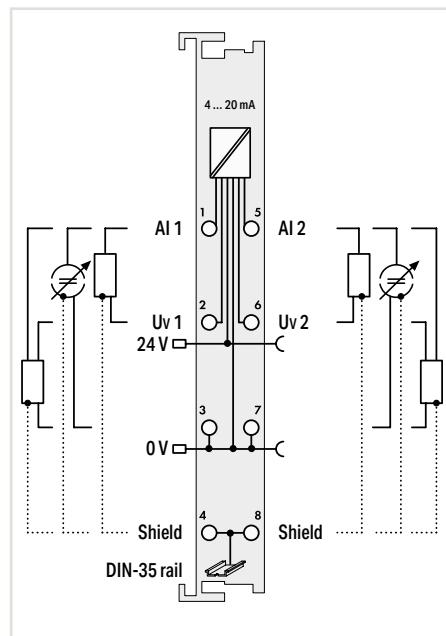

Item Description	2-Channel Analog Input; 4 ... 20 mA; Single-ended	
Version	Standard	60 Hz
Item No.	750-473	750-473/005-000
Order Text	2AI; 4-20mA; SE	2AI; 4-20mA; SE: 60Hz
Technical Data		
Extended functionality	Short-circuit-protected sensor supply	
Number of analog inputs	2	
Signal type	4 ... 20 mA	
Signal characteristic	Single-ended	
Resolution	12 bits	
Conversion time	80 ms	
Input resistance	< 160 Ω / 20 mA	
Input filter (analog)	50 Hz	60 Hz
Measuring error (max.) at 25 °C	±0.1 % of the upper-range value	
Temperature error (max.)	±0.01 % of the upper-range value	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	100 mA	
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE; IECEx Marine; IECEx OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-473	

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 520 or www.wago.com

Analog Input; 4 ... 20 mA; Single-Ended

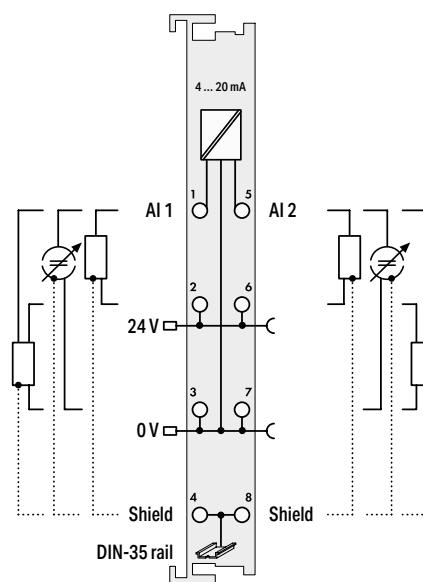


Figure: 750-474



Figure: 753-474

5.4



2-Channel Analog Input; 4 ... 20 mA; Single-ended; 16 bits			
Standard	60 Hz	Pluggable (delivery without connector)	Data format (S5 control)
750-474	750-474/005-000	753-474	750-474/000-200
2AI; 4-20mA; SE; 16bits	2AI; 4-20mA; SE; 16bits; 60Hz	2AI; 4-20mA; SE; 16bits	2AI; 4-20mA; SE; 16bits; S5

Technical Data

Extended functionality	Overload protection		
Pluggable connector	•	•	•
Customized data format for S5* controller	2	4 ... 20 mA	Single-ended
Number of analog inputs	15 bits	80 ms	
Signal type	220 Ω / 20 mA		
Signal characteristic	50 Hz	60 Hz	50 Hz
Resolution	±0.1 % of the upper-range value	±0.01 % of the upper-range value	
Conversion time	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	75 mA	
Input resistance	2 x 16-bit data; 2 x 8-bit control/status (optional)	500 V (system/field)	
Input filter (analog)	0 ... +55 °C	12 x 69.8 x 100 mm	
Measuring error (max.) at 25 °C	500 V (system/field)	CE; IECEx; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Temperature error (max.)	12 x 69.8 x 100 mm	wago.com/750-474	wago.com/753-474
Supply voltage (field)	CE; IECEx; Marine; OrdLoc/HazLoc; ATEX/IECEx	wago.com/750-474/000-200	wago.com/750-474/000-200
Current consumption – system supply (5 V)			
Data width			
Isolation			
Surrounding air temperature (operation)			
Dimensions W x H x D			

Approvals

Data sheet and further information, see:

Accessories

Pluggable connector

Coding keys

Item No.

753-110

753-150

*The S5 format allows you to import data with the standard S5 FB 250 function block.

Analog Input; 4 ... 20 mA HART


5.4



Figure: 750-482



Figure: 753-482

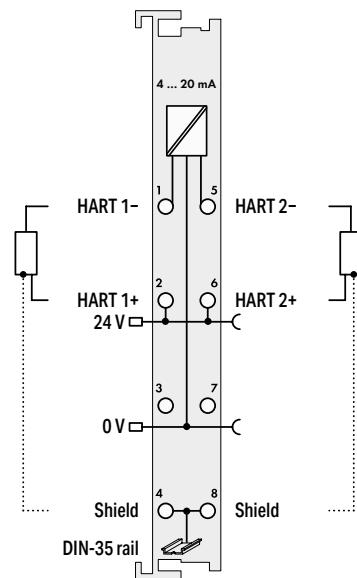

2-Channel Analog Input; 4 ... 20 mA HART			
Item Description	Standard	Extended temperature	Pluggable (delivery without connector)
Version	750-482	750-482/025-000	753-482
Item No.	750-482/000-300		
Order Text	2AI; 4-20mA HART	2AI; 4-20mA HART; T	2AI; 4-20mA HART
Technical Data			
Extended functionality	Overload protection		
Pluggable connector	•		
Customized data format for S7 control	•		
Number of analog inputs	2		
Signal type	4 ... 20 mA		
Signal characteristic	Single-ended		
Resolution	12 bits		
Conversion time	10 ms		
Measuring error (max.) at 25 °C	±0.1 % of the upper-range value		
Temperature error (max.)	±0.01 % of the upper-range value		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption – system supply (5 V)	65 mA		
Data width	2 x 2-byte data; 2 x 2-byte data + 2n x 4-byte data (n = number of dynamic variables); 2 x 2-byte data + 6-byte mailbox		
Configurable functions	4 HART dynamic variables (PV, SV, TV, QV)		
Isolation	500 V (system/field)		
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm		
Approvals	CE; UL; CSA; OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-482	wago.com/753-482	wago.com/750-482/000-300
Accessories			
Pluggable connector	753-110		
Coding keys	753-150		


HART devices per channel:
1 device (SingleDrop, no MultiDrop)

For select fieldbus couplers, FDT/DTM device drivers are available that can be used to integrate the I/O module into a higher-level control system.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 520 or www.wago.com

Analog Input; 4 ... 20 mA HART

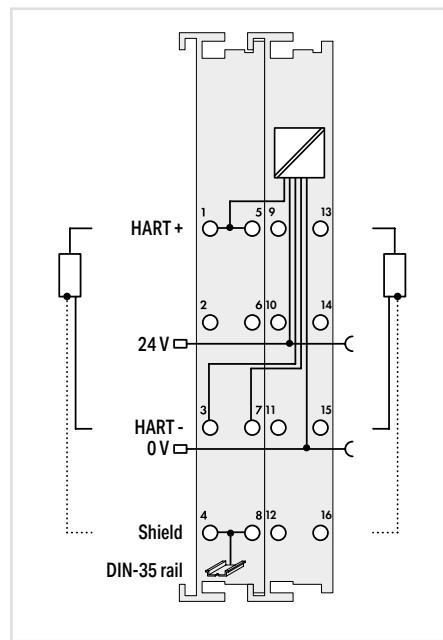

Item Description	2-Channel Analog Input; 4 ... 20 mA HART
Version	NAMUR NE43
Item No.	750-482/000-001
Order Text	2AI; 4-20mA HART; NE43
Technical Data	
Extended functionality	Overload protection
Number of analog inputs	2
Signal type	3.6 ... 21 mA
Signal characteristic	Single-ended
Resolution	12 bits
Conversion time	10 ... 640 ms (programmable)
Measuring error (max.) at 25 °C	±0.2 % of the upper-range value
Temperature error (max.)	±0.01 % of the upper-range value
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	25 mA
Data width	2 x 2-byte data; 2 x 2-byte data + 2n x 4-byte data (n = number of dynamic variables); 2 x 2-byte data + 6-byte mailbox
Configurable functions	4 HART dynamic variables (PV, SV, TV, QV)
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 67.8 x 100 mm
Approvals	CE; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-482/000-001

HART devices per channel:
1 device (SingleDrop, no MultiDrop)

For select fieldbus couplers, FDT/DTM device drivers are available that can be used to integrate the I/O module into a higher-level control system.



Analog Input; 4 ... 20 mA; Single-Ended

5.4



Figure: 750-455

Figure: 753-455

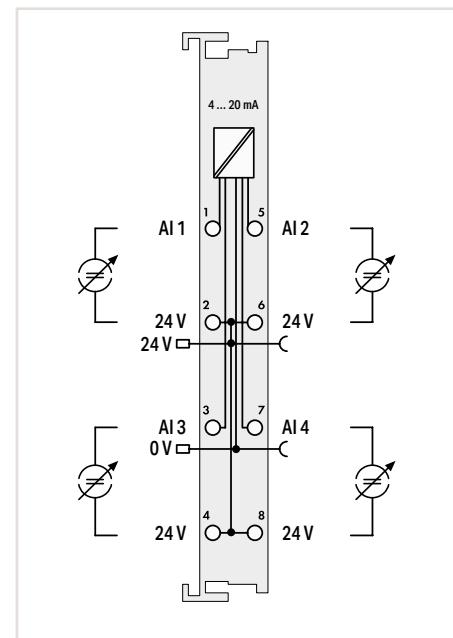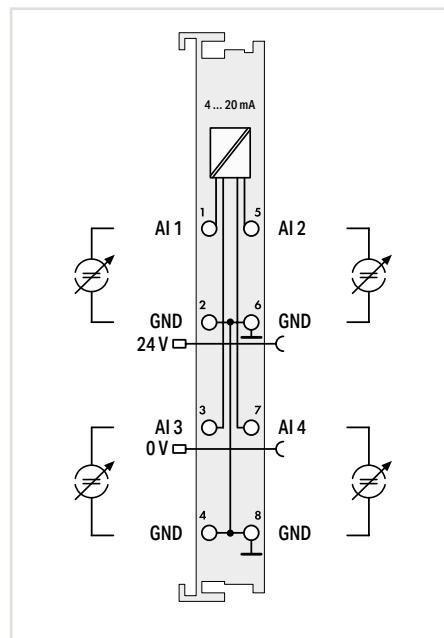


Item Description	4-Channel Analog Input; 4 ... 20 mA; Single-ended; 4 x GND			4-Channel Analog Input; 4 ... 20 mA; Single-ended; 4 x 24 V
Version	Standard	Extended temperature	Pluggable (delivery without connector)	4 x 24 V
Item No.	750-455	750-455/025-000	753-455	750-455/020-000
Order Text	4AI; 4-20mA; SE	4AI; 4-20mA; SE; T	4AI; 4-20mA; SE	4AI; 4-20mA; SE; 4x24V
Technical Data				
Pluggable connector				
Number of analog inputs	4			4
Signal type	4 ... 20 mA			4 ... 20 mA
Signal characteristic	Single-ended			Single-ended
Resolution	12 bits			12 bits
Conversion time	10 ms			10 ms
Input resistance	< 100 Ω / 20 mA			< 100 Ω / 20 mA
Measuring error (max.) at 25 °C	±0.1 % of the upper-range value			±0.1 % of the upper-range value
Temperature error (max.)	±0.01 % of the upper-range value			±0.01 % of the upper-range value
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	65 mA			65 mA
Data width	4 x 16-bit data; 4 x 8-bit control/status (optional)			4 x 16-bit data; 4 x 8-bit control/status (optional)
Isolation	500 V (system/field)			500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C			0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm			12 x 69.8 x 100 mm
Approvals	CE; UL Marine; CSA OrdLoc/HazLoc; ATEX/IECEx			CE; UL Marine; CSA OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-455	wago.com/753-455		wago.com/750-455/020-000
Accessories				
Pluggable connector			Item No.	
Coding keys		753-110		
		753-150		

“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 520 or www.wago.com

Analog Input; Configurable 0/4 ... 20 mA; Single-Ended

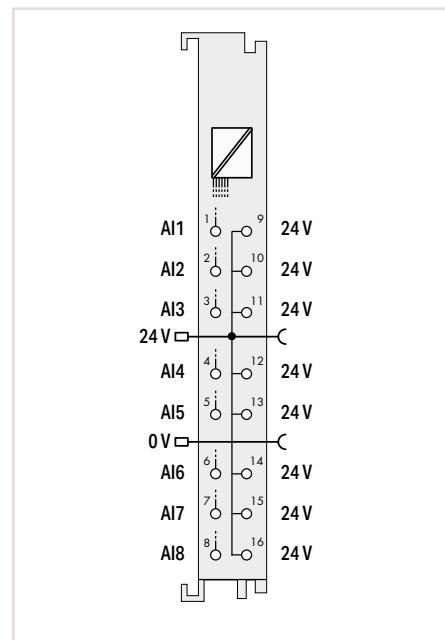

Item Description	8-Channel Analog Input; 0/4 ... 20 mA; Single-ended
Version	
Item No.	750-496
Order Text	8AI; 0/4-20mA; SE
Technical Data	
Number of analog inputs	8
Signal type	Configurable: 0 ... 20 mA; 4 ... 20 mA; 3.6 ... 21 mA
Resolution	12 bits
Conversion time	10 ms
Input resistance	< 220 Ω
Input voltage (max.)	31.2 VDC
Measuring error (max.) at 25 °C	±0.1 % of the upper-range value
Temperature error (max.)	±0.01 % of the upper-range value
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	69 mA
Data width	8 x 16-bit data; 8 x 8-bit control/status (optional)
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69 x 100 mm
Approvals	CE; KC; Marine; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-496



Analog Input; 0 ... 1 A or 0 ... 5 AAC/DC; Differential Input

5.4



Figure: 750-475

Figure: 753-475

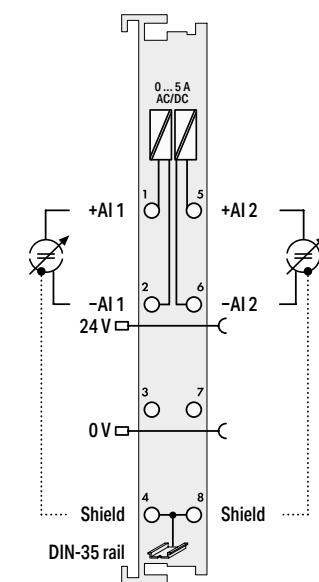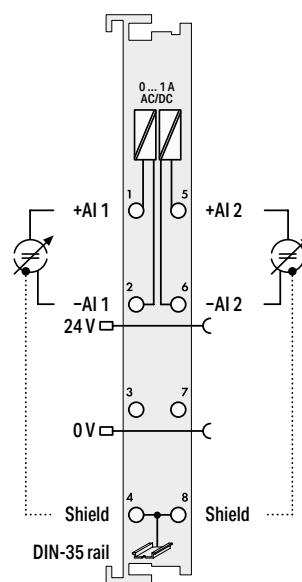

Item Description	2-Channel Analog Input; 0 ... 1 AAC/DC; Differential input	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-475	753-475
Order Text	2AI; 0-1A AC/DC; Diff	2AI; 0-1A AC/DC; Diff
Technical Data		
Pluggable connector		●
Number of analog inputs	2	2
Signal type	0 ... 1 A rms (peak value 2.0 A)	0 ... 5 A rms (peak value 6.0 A)
Signal characteristic	Differential	Differential
Input voltage (max.)	24 VAC/DC (-20 ... +20 %)	24 VAC/DC (-20 ... +20 %)
Resolution	15 bits	15 bits
Conversion time	200 ms	200 ms
Load impedance	22 mΩ	22 mΩ
Measuring error (max.) at 25 °C	±0.1 % of the upper-range value	±0.1 % of the upper-range value
Temperature error (max.)	±110 ppm/K of the upper-range value	±110 ppm/K of the upper-range value
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	80 mA	80 mA
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)	2 x 16-bit data; 2 x 8-bit control/status (optional)
Isolation	500 V (system/field or channel/channel)	500 V (system/field or channel/channel)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm
Approvals	CE; □; □; Marine; □; OrdLoc/HazLoc; □ ATEX/IECEx	CE; □; □; Marine; □; OrdLoc/HazLoc; □ ATEX/IECEx
Data sheet and further information, see:	wago.com/750-475	wago.com/753-475
Accessories	Item No.	
Pluggable connector	753-110	
Coding keys	753-150	

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"



“ Approvals and corresponding ratings, see page 520 or www.wago.com

Analog Input; ± 10 VDC; Differential Input



Figure: 750-456

Figure: 750-479

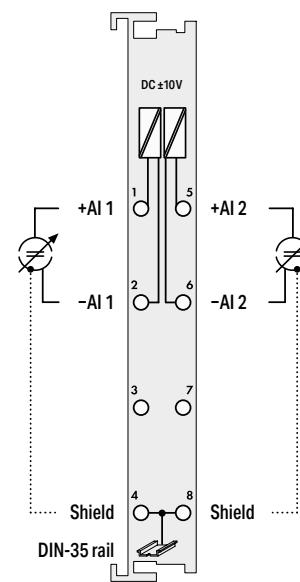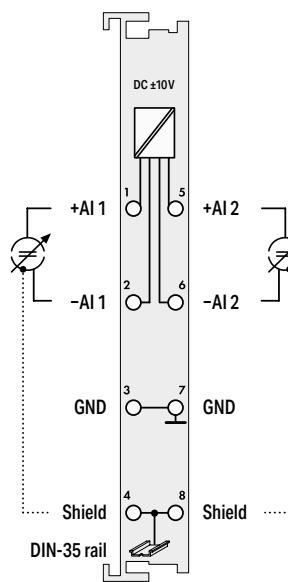

Item Description	2-Channel Analog Input; ± 10 VDC; Differential input			2-Channel Analog Input; ± 10 VDC; Differential input		
Version	Standard	Data format (S5 control)	Pluggable (delivery without connector)	Standard	Synchronous	Pluggable (delivery without connector)
Item No.	750-456	750-456/000-200	753-456	750-479	750-479/000-001	753-479
Order Text	2AI; ± 10 VDC; Diff	2AI; ± 10 VDC; Diff; S5	2AI; ± 10 VDC; Diff	2AI; ± 10 VDC; Diff	2AI; ± 10 VDC; Diff; Sync	2AI; ± 10 VDC; Diff

Technical Data

Extended functionality			
Pluggable connector	●	●	●
Customized data format for S5 control*	●		
Number of analog inputs	2		2
Signal type	± 10 V		± 10 V
Signal characteristic	Differential		Differential
Resolution	12 bits		13 bits + sign
Conversion time	2 ms		1 ms
Internal resistance	570 k Ω		1 M Ω
Input filter (analog)			5 kHz
Admissible continuous overload			60 V
Measuring error (max.) at 25 °C	± 0.2 % of the upper-range value		± 0.05 % of the upper-range value
Temperature error (max.)	± 0.015 %/K of the upper-range value		± 0.01 % of the upper-range value
Current consumption – system supply (5 V)	80 mA		100 mA
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)		2 x 16-bit data; 2 x 8-bit control/status (optional)
Isolation	500 V (system/field)		500 V (system/field or channel/channel)
Surrounding air temperature (operation)	0 ... +55 °C		0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm		12 x 69.8 x 100 mm
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx		CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-456	wago.com/753-456	wago.com/750-479
Accessories		Item No.	Item No.
Pluggable connector		753-110	753-110
Coding keys		753-150	753-150

*The S5 format allows you to import data with the standard S5 FB 250 function block.

Analog Input; ± 10 VDC; Single-Ended



5.4



Figure: 750-476



Figure: 750-457

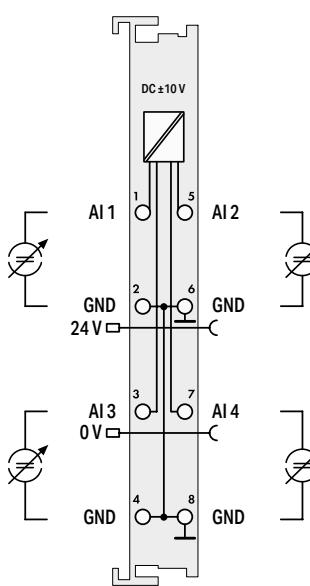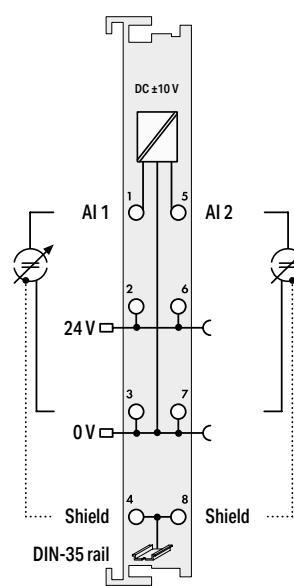

Item Description			2-Channel Analog Input; ± 10 VDC; Single-ended; 16 bits			4-Channel Analog Input; ± 10 VDC; Single-ended		
Version	Standard	Data format (S5 control)	Pluggable (delivery without connector)	Standard	Extended temperature	Pluggable (delivery without connector)		
Item No.	750-476	750-476/000-200	753-476	750-457	750-457/025-000	753-457		
Order Text	2AI; ± 10 VDC; SE; 16bits	2AI; ± 10 VDC; SE; 16bits; S5	2AI; ± 10 VDC; SE; 16bits	4AI; ± 10 VDC; SE	4AI; ± 10 VDC; SE; T	4AI; ± 10 VDC; SE		
Technical Data								
Pluggable connector			●			●		
Customized data format for S5 control*			●			●		
Number of analog inputs			2			4		
Signal type			± 10 V			± 10 V		
Signal characteristic			Single-ended			Single-ended		
Resolution			15 bits + sign			12 bits		
Conversion time			80 ms			10 ms		
Internal resistance			130 k Ω			> 100 k Ω		
Input voltage (max.)			24 V			± 40 V		
Input filter (analog)	50 Hz	60 Hz	50 Hz					
Measuring error (max.) at 25 °C			± 0.1 % of the upper-range value			± 0.1 % of the upper-range value		
Temperature error (max.)			± 0.01 % of the upper-range value			± 0.01 % of the upper-range value		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			65 mA	
Current consumption – system supply (5 V)			75 mA				4 x 16-bit data; 4 x 8-bit control/status (optional)	
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)			500 V (system/field)			500 V (system/field)	
Isolation				0 ... +55 °C			0 ... +55 °C	-20 ... +60 °C
Surrounding air temperature (operation)				12 x 69.8 x 100 mm			0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D				CE;			CE;	
Approvals				wago.com/750-476	wago.com/753-476		wago.com/750-457	wago.com/753-457
Data sheet and further information, see:								
Accessories				Item No.			Item No.	
Pluggable connector				753-110			753-110	
Coding keys				753-150			753-150	

*The S5 format allows you to import data with the standard S5 FB 250 function block.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 520 or www.wago.com



Analog Input; 0 ... 10 VDC; Single-Ended



Figure: 750-467



Figure: 750-478

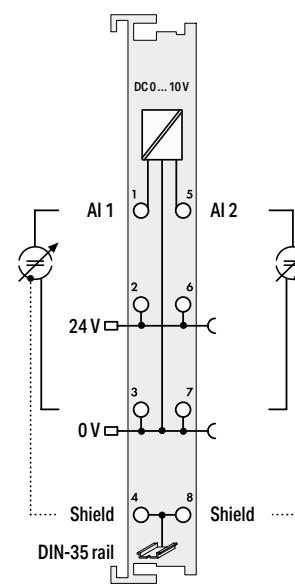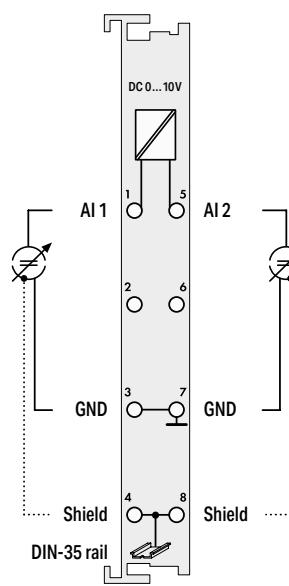

5.4

Item Description	2-Channel Analog Input; 0 ... 10 VDC; Single-ended		2-Channel Analog Input; 0 ... 10 VDC; Single-ended; 16 bits	
Version	Standard	Pluggable (delivery without connector)	Standard	60 Hz
Item No.	750-467	753-467	750-478	750-478/005-000
Order Text	2AI; 0-10 VDC; SE	2AI; 0-10 VDC; SE	753-478	2AI; 0-10 VDC; SE; 16bits; 60Hz
Technical Data				
Pluggable connector		•		•
Number of analog inputs	2		2	
Signal type	0 ... 10 V		0 ... 10 V	
Signal characteristic	Single-ended		Single-ended	
Resolution	12 bits		16 bits	
Conversion time	2 ms		80 ms	
Internal resistance	130 kΩ		130 kΩ	
Input voltage (max.)	35 V		24 V	
Input filter (analog)		50 Hz	60 Hz	50 Hz
Measuring error (max.) at 25 °C	±0.2 % of the upper-range value		±0.1 % of the upper-range value	
Temperature error (max.)	±0.01 % of the upper-range value		±0.01 % of the upper-range value	
Supply voltage (field)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption – system supply (5 V)	60 mA		75 mA	
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)		2 x 16-bit data; 2 x 8-bit control/status (optional)	
Isolation	500 V (system/field)		500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C		0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm		12 x 69.8 x 100 mm	
Approvals	CE, UL, CSA OrdLoc/HazLoc; ATEX/IECEx		CE, UL, CSA Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-467	wago.com/753-467	wago.com/750-478	wago.com/753-478
Accessories				Item No.
Pluggable connector				753-110
Coding keys				753-150



Analog Input; 0 ... 10 VDC; Single-Ended

5.4



Figure: 750-468

Figure: 750-459

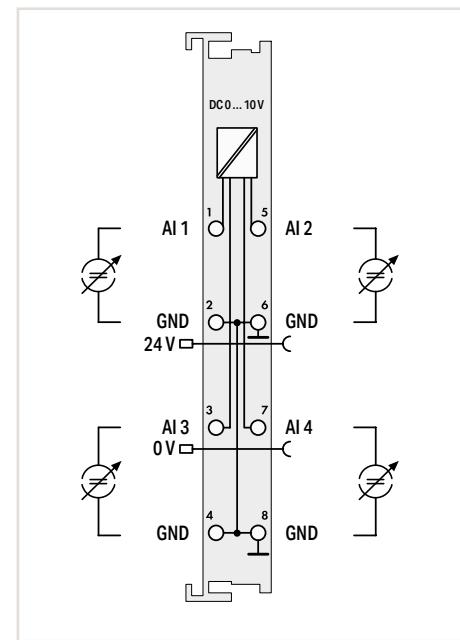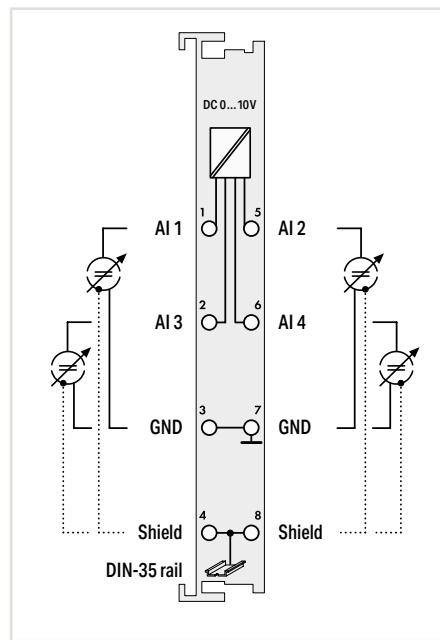

Item Description	4-Channel Analog Input; 0 ... 10 VDC; Single-ended	
Version	Standard	Extended temperature
Item No.	750-468	750-468/025-000
Order Text	4AI; 0-10 VDC; SE	4AI; 0-10 VDC; SE; T


Item Description	4-Channel Analog Input; 0 ... 10 VDC; Single-ended	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-459	753-459
Order Text	4AI; 0-10 VDC; SE	4AI; 0-10 VDC; SE

Technical Data		
Pluggable connector		●
Number of analog inputs	4	
Signal type	0 ... 10 V	
Signal characteristic	Single-ended	
Resolution	12 bits	
Conversion time	4 ms	
Internal resistance	133 kΩ	
Input voltage (max.)	35 V	
Measuring error (max.) at 25 °C	±0.2 % of the upper-range value	
Temperature error (max.)	±0.01 % of the upper-range value	
Supply voltage (field)		24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	60 mA	65 mA
Data width	4 x 16-bit data; 4 x 8-bit control/status (optional)	4 x 16-bit data; 4 x 8-bit control/status (optional)
Isolation	500 V (system/field)	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm
Approvals	CE; □ Marine; □ OrdLoc/HazLoc; □ ATEX/IECEx	CE; □ Marine; □ OrdLoc/HazLoc; □ ATEX/IECEx
Data sheet and further information, see:	wago.com/750-468	wago.com/750-459 wago.com/753-459
Accessories		
Pluggable connector		
Coding keys		
Item No.		
	753-110	
	753-150	

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 520 or www.wago.com

Analog Input; Configurable ±10 VDC/0 ... 10 V; Single-Ended

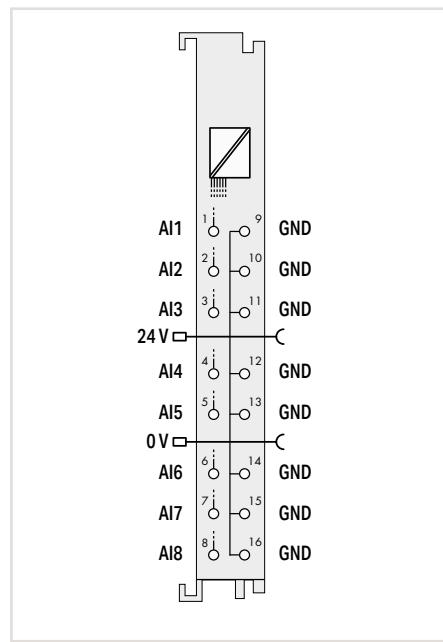

Item Description	8-Channel Analog Input; 0 ... 10 VDC/±10 V; Single-ended
Version	
Item No.	750-497
Order Text	8AI; 0-10 V/±10 VDC; SE
Technical Data	
Number of analog inputs	8
Signal type	Configurable: 0 ... 10 V / ±10 V
Resolution	12 bits
Internal resistance	> 100 kΩ
Measuring error (max.) at 25 °C	±0.1 % of the upper-range value
Temperature error (max.)	±0.01 % of the upper-range value
Supply voltage (field)	24 VDC (–25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	105 mA
Data width	8 x 16-bit data; 8 x 8-bit control/status (optional)
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69 x 100 mm
Approvals	CE; UL; Marine; CSA; OrdLoc/HazLoc
Data sheet and further information, see:	wago.com/750-497

Analog Input; 0 ... 10 VAC/DC or 0 ... 30 VDC; Differential Input



5.4



Figure: 750-477



Figure: 750-483

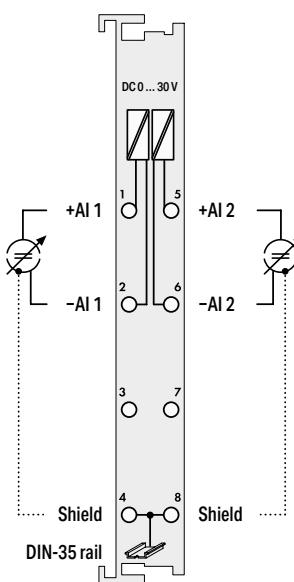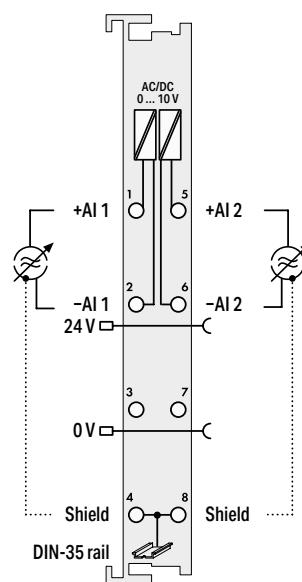


Item Description	2-Channel Analog Input; 0 ... 10 VAC/DC; Differential input		Item Description	2-Channel Analog Input; 0 ... 30 VDC; Differential input	
Version	Standard	Pluggable (delivery without connector)	Version	Standard	Pluggable (delivery without connector)
Item No.	750-477	753-477	Item No.	750-483	753-483
Order Text	2AI; 0-10 VAC/VDC; Diff	2AI; 0-10 VAC/VDC; Diff	Order Text	2AI; 0-30 VDC; Diff	2AI; 0-30 VDC; Diff
Technical Data					
Extended functionality			Time-synchronized measured value acquisition within the module		
Pluggable connector			•		
Number of analog inputs	2		2		
Signal type	0 ... 10 V rms (peak value 20 V)		0 ... 30 V		
Signal characteristic	Differential		Differential		
Resolution	15 bits		14 bits		
Conversion time	200 ms		1 ms		
Internal resistance	120 kΩ		1 MΩ		
Measuring error (max.) at 25 °C	±0.1 % of the upper-range value		±0.05 % of the upper-range value		
Temperature error (max.)	±110 ppm/K of the upper-range value		±0.01 % of the upper-range value		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		80 mA		
Current consumption – system supply (5 V)	80 mA		80 mA		
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)		2 x 16-bit data; 2 x 8-bit control/status (optional)		
Isolation	500 V (system/field or channel/channel)		500 V (system/field or channel/channel)		
Surrounding air temperature (operation)	0 ... +55 °C		0 ... +55 °C		
Dimensions W x H x D	12 x 69.8 x 100 mm		12 x 69.8 x 100 mm		
Approvals	CE; ; OrdLoc/HazLoc; ATEX/IECEx		; Marine; ; OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-477		wago.com/753-477		
Accessories					
Pluggable connector	753-110		753-110		
Coding keys	753-150		753-150		

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 520 or www.wago.com

Analog Input; Voltage/Current; Differential Input

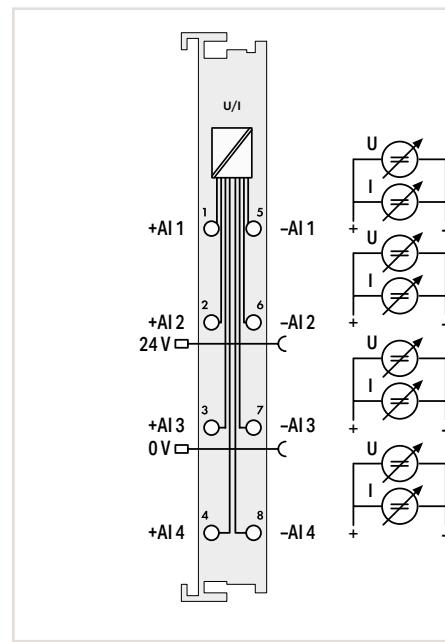

Item Description	4-Channel Analog Input; Voltage/current; Differential input; 16 bits; Diagnostics
Item No.	750-471
Order Text	4AI; U/I; Diff; Galv
Technical Data	
Number of analog inputs	4 (electrically isolated)
Signal type	Voltages and currents (Configurable channel for channel)
Signal characteristic	Differential
Measurement range	0 ... 20 mA; 4 ... 20 mA; 3.6 ... 21 mA NE43; \pm 20 mA 0 ... 10 V; \pm 10 V; \pm 200 mV
Sensor connection	2-wire
Input impedance	AI (U) >100 k Ω ; AI (I) <130 Ω (typ. 113 Ω)
Resolution	16 bits
Conversion time	\leq 5 ms
Measuring error (max.) at 25 °C	\pm 0.1 % of the upper-range value \pm 0.2 % at \pm 200 mV
Temperature error (max.)	\pm 0.01 %/K of the upper-range value
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	100 mA
Data width	4 x 16-bit data; 4 x 8-bit control/status (optional)
Isolation	2 kV (channel/channel); 2 kV (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-471

Analog Input; for Resistance Sensors


5.4



Figure: 750-461



Figure: 753-461

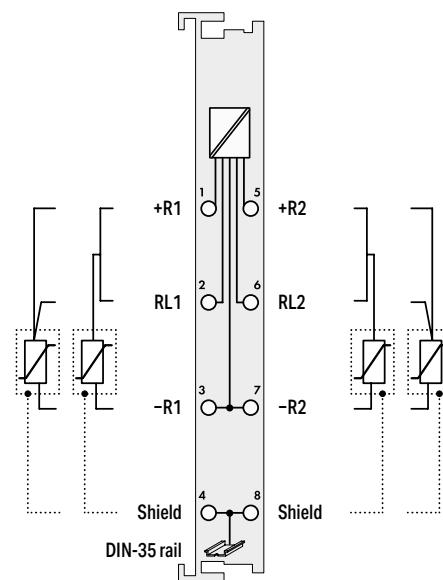



Item Description	2-Channel Analog Input; for Pt100/RTD resistance sensors					
Version	Standard	Pluggable (delivery without connector)	Adjustable	Pluggable (delivery without connector); Adjustable	Extended temperature	Data format (S5 control)
750-461	753-461	750-461/003-000	753-461/003-000	750-461/025-000	750-461/000-200	
Order Text	2AI; Pt100/RTD	2AI; Pt100/RTD	2AI; Pt100/RTD; Adjust	2AI; Pt100/RTD; Adjust	2AI; Pt100/RTD; T	2AI; Pt100/RTD; S5

Technical Data

Pluggable connector	•	•	•	•		
Customized data format for S5 control*				•		
Number of analog inputs	2					
Signal type	Pt100	Pt100 Configurable: Pt; Ni; Ohm	Pt100	Pt100		
Sensor connection	2-wire; 3-wire					
Temperature range	-200 ... +850 °C					
Resolution	0.1 °C					
Conversion time	320 ms (per channel)					
Measured current (typ.)	0.5 mA					
Measuring error (max.) at 25 °C	±0.2 % of the upper-range value					
Temperature error (max.)	±0.01 % of the upper-range value					
Current consumption – system supply (5 V)	80 mA					
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)					
Isolation	500 V (system/field)					
Surrounding air temperature (operation)	0 ... +55 °C		-20 ... +60 °C			
Dimensions W x H x D	12 x 69.8 x 100 mm					
Approvals	CE; UL; Marine; CSA; OrdLoc/HazLoc; ATEX/IECEx					
Data sheet and further information, see:	wago.com/750-461	wago.com/753-461	wago.com/750-461	wago.com/753-461	wago.com/750-461	
Accessories	Item No.	Item No.	Item No.	Item No.	Item No.	
Pluggable connector	753-110		753-110			
Coding keys	753-150		753-150			

*The S5 format allows you to import data with the standard S5 FB 250 function block.

Approvals and corresponding ratings,
see page 520 or www.wago.com

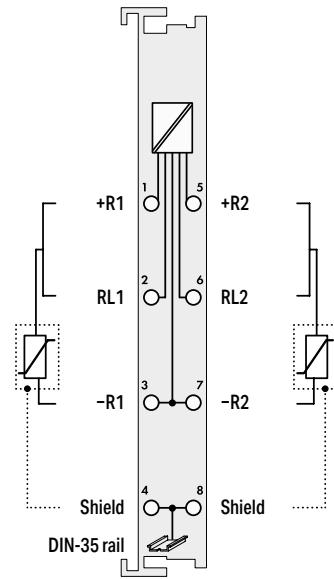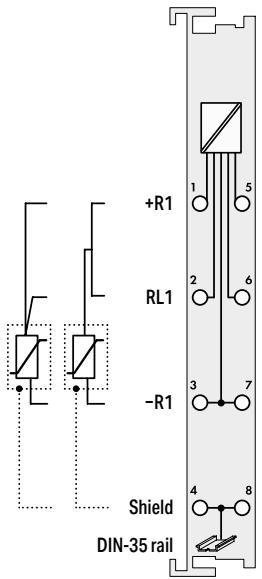

2-Channel Analog Input; for resistance sensors

Pt1000/RTD	Ni1000/ RTD	Ni1000 TK5000
750-461/000-003 2AI; Pt1000/RTD	750-461/000-005 2AI; Ni1000/RTD	750-461/000-009 2AI; Ni1000 TK5000

2-Channel Analog Input; for resistance sensors

NTC 20k	10 ... 1200 Ohm	10 ... 5000 Ohm
750-461/020-000 2AI; NTC 20k	750-461/000-002 2AI; 10R-1k2	750-461/000-007 2AI; 10R-5k0

2

Pt1000 Ni1000 TK6180 Ni1000 TK5000

2-wire; 3-wire

-200 ... +850 °C -60 ... +250 °C -30 ... +122 °C

0.1 °C

320 ms (per channel)

0.5 mA

±0.2 % of the upper-range value

±0.01 % of the upper-range value

80 mA

2 x 16-bit data; 2 x 8-bit control/status (optional)

500 V (system/field)

0 ... +55 °C

12 x 69.8 x 100 mm

CE; IP65; Marine; ATEX/IECEx

wago.com/750-461

2

NTC 20k 10R ... 1k2 10R ... 5k0

2-wire

-30 ... +130 °C

0.1 °C

0.1 Ohm

0.5 Ohm

320 ms (per channel)

0.05 mA

0.5 mA

0.5 ... 3 K (temperature-dependent) ±0.2 % of the upper-range value

±0.002 % of the upper-range value ±0.01 % of the upper-range value

65 mA

80 mA

2 x 16-bit data; 2 x 8-bit control/status (optional)

500 V (system/field)

0 ... +55 °C

12 x 69.8 x 100 mm

CE; IP65; Marine; ATEX/IECEx

wago.com/750-461

Analog Input; for Resistance Sensors



5.4



Figure: 750-464






Figure: 750-450

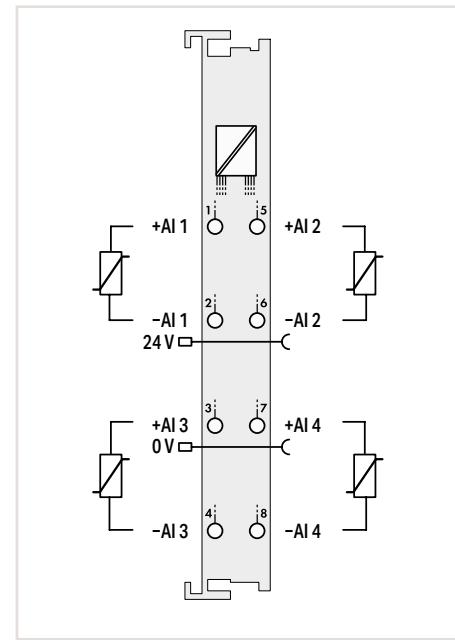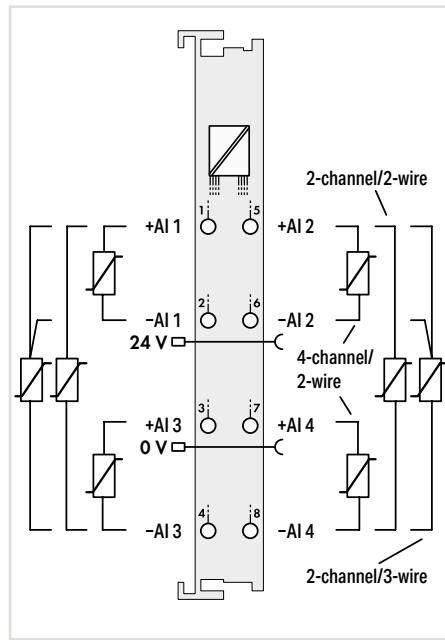

Item Description	2/4-Channel Analog Input; Resistance measurement; Adjustable	
Version	Standard	
Item No.	750-464	
Order Text	2/4AI; RTD; Adjust	
Technical Data		
Number of analog inputs	2/4	4
Signal type	Pt100; Configurable: Pt200; Pt500; Pt1000; Ni100; Ni120; Ni1000; Potentiometer (2-channel operation only); 10 Ohm ... 1.2 kOhm; 10 Ohm ... 5 kOhm	NTC 10 kOhm; Configurable: NTC 10 kOhm Thermokon; NTC 20 kOhm
Sensor connection	2-wire; 3-wire	2-wire
Temperature range	-200 ... +850 °C (Pt100 ... Pt1000); -60 ... +300 °C (Ni100, Ni1000); -60 ... +250 °C (Ni1000 TK5000); -80 ... +260 °C (Ni120)	-50 ... +150 °C
Resolution	0.1 °C	0.1 °C
Conversion time	320 ms (per channel)	320 ms (per channel)
Measured current (typ.)	≤ 350 µA	≤ 350 µA
Measuring error (max.) at 25 °C	1 K over entire temperature range; 0.5 K over limited temperature range (-30 ... +120 °C; Pt1000)	2 K within the entire temperature range
Temperature error (max.)	20 ppm/K	20 ppm/K
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	50 mA	50 mA
Data width	4 (2) x 16-bit data; 4 (2) x 8-bit control/status (optional)	4 x 16-bit data; 4 x 8-bit control/status (optional)
Isolation	500 V (system/field)	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm
Approvals	CE; IEC Marine; ATEX/HazLoc; ATEX/IECEx	CE; IEC Marine; ATEX/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-464	

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 520 or www.wago.com

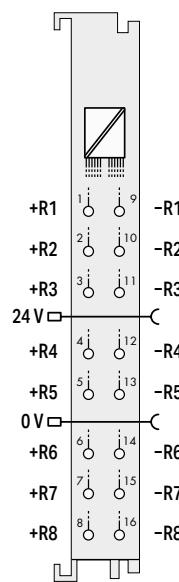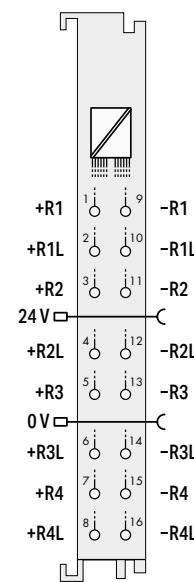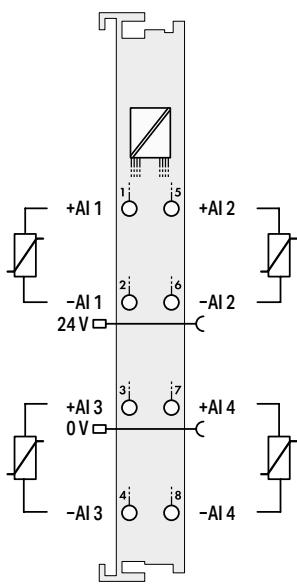

4-Channel Analog Input; Resistance measurement

Measurement range: $-30^{\circ}\text{C} \dots +150^{\circ}\text{C}$

750-463

4AI; RTD; $-30^{\circ}\text{C} \dots +150^{\circ}\text{C}$

4-Channel Analog Input; Resistance measurement; Adjustable

Standard

750-450

4AI; RTD; Adjust

8-Channel Analog Input; Resistance measurement; Adjustable

Standard

750-451

8AI; RTD; Adjust

Extended temperature

750-451/025-000

4

Pt1000; Configurable: Ni1000; KTY 81

2-wire

$-30 \dots +150^{\circ}\text{C}$

0.1°C

$\leq 350 \mu\text{A}$

0.5 K in temperature range: $-30 \dots +150^{\circ}\text{C}$

20 ppm/K

24 VDC ($-25 \dots +30\%$); via power jumper contacts
(power supply via blade contact; transmission via
spring contact)

50 mA

4 x 16-bit data; 4 x 8-bit control/status (optional)

500 V (system/field)

$0 \dots +55^{\circ}\text{C}$

12 x 69.8 x 100 mm

CE; IP67; OrdLoc/HazLoc; ATEX/IECEx

wago.com/750-463

4

Pt100; Configurable: Pt200; Pt500; Pt1000;
Ni100; Ni120; Ni1000 (TK6180 + TK5000);
Potentiometer 0 Ohm ... 1.2 kOhm;
0 Ohm ... 5 kOhm

2-wire; 3-wire; 4-wire

$-200 \dots +850^{\circ}\text{C}$ (Pt100, Pt200, Pt500, Pt1000);
 $-60 \dots +250^{\circ}\text{C}$ (Ni100, Ni1000);
 $-80 \dots +260^{\circ}\text{C}$ (Ni120)

0.1°C

Per channel: $\leq 100 \text{ ms}$ (2-/4-wire connection),
 $\leq 200 \text{ ms}$ (3-wire connection)

$\leq 350 \mu\text{A}$

$\pm 0.6 \text{ K}$ (Pt100, Pt200, Pt500, Ni100, Ni120);
 $\pm 0.2 \text{ K}$ (Pt1000, Ni1000);
 $\pm 0.3 \dots 0.7 \Omega$ at resistance measurement

$\pm 5 \text{ ppm/K}$

24 VDC ($-25 \dots +30\%$); via power jumper contacts
(power supply via blade contact; transmission via
spring contact)

85 mA

4 x 16-bit data; 4 x 8-bit control/status (optional)

500 V (system/field)

$0 \dots +55^{\circ}\text{C}$

12 x 69.8 x 100 mm

CE; IP67; Marine; OrdLoc/HazLoc;

ATEX/IECEx

wago.com/750-450

8

Pt100; Configurable: Pt200; Pt500; Pt1000;
Ni100; Ni120; Ni1000 (TK6180 + TK5000);
Potentiometer 0 Ohm ... 1.2 kOhm;
0 Ohm ... 5 kOhm

2-wire

$-200 \dots +850^{\circ}\text{C}$ (Pt100, Pt200, Pt500, Pt1000);
 $-60 \dots +250^{\circ}\text{C}$ (Ni100, Ni1000);
 $-80 \dots +260^{\circ}\text{C}$ (Ni120)

0.1°C

Per channel: $\leq 100 \text{ ms}$

$\leq 350 \mu\text{A}$

$\pm 0.6 \text{ K}$ (Pt100, Pt200, Pt500, Ni100, Ni120);
 $\pm 0.2 \text{ K}$ (Pt1000, Ni1000);
 $\pm 0.3 \Omega$ at resistance measurement

$\pm 5 \text{ ppm/K}$

24 VDC ($-25 \dots +30\%$); via power jumper contacts
(power supply via blade contact; transmission via
spring contact)

110 mA

8 x 16-bit data; 8 x 8-bit control/status (optional)

500 V (system/field)

$0 \dots +55^{\circ}\text{C}$ $-20 \dots +60^{\circ}\text{C}$

12 x 69.8 x 100 mm

CE; IP67; Marine; OrdLoc/HazLoc;

ATEX/IECEx

wago.com/750-451

Analog Input; for Thermocouples


5.4



Figure: 750-469





Figure: 750-458

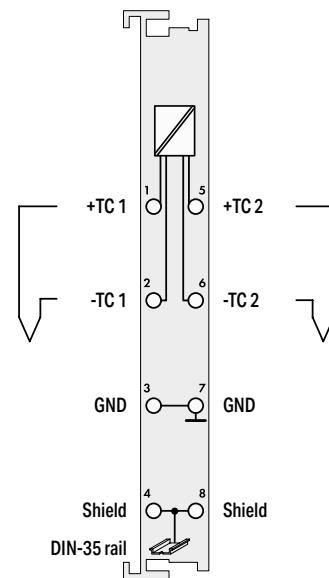

Item Description				
2-Channel Analog Input; Thermocouple K; Diagnostics				
Version	Standard	Pluggable (delivery without connector)	Adjustable	Pluggable (delivery without connector); Adjustable
Item No.	750-469	753-469	750-469/003-000	753-469/003-000
Order Text	2AI; TC K; Diagn	2AI; TC K; Diagn	2AI; TC K; Diagn Adjust	2AI; TC K; Diagn Adjust
Technical Data				
Pluggable connector		●		●
Customized data format for S5 control*				●
Number of analog inputs	2			
Signal type	Thermocouple K		Thermocouple K; Configurable: L; J; E; T; N; U; B; R; S; mV	Thermocouple K
Temperature range	-100 ... +1370 °C		Sensor-specific	-100 ... +1370 °C
Resolution	0.1 °C			
Conversion time	320 ms			
Measuring error (max.) at 25 °C	±6 K (voltage input: ±2 K; cold junction compensation: ±4 K)			
Temperature error (max.)	±0.2 K/K			
Cold junction compensation	Integrated or external			
Supply voltage (field)				
Current consumption – system supply (5 V)	6 mA			
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)			
Isolation	500 V (system/field)			
Surrounding air temperature (operation)	0 ... +55 °C			
Dimensions W x H x D	12 x 69.8 x 100 mm			
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-469	wago.com/753-469	wago.com/750-469	wago.com/753-469
Accessories	Item No.	753-110	Item No.	753-110
Pluggable connector		753-150		753-150
Coding keys				

*The S5 format allows you to import data with the standard S5 FB 250 function block.

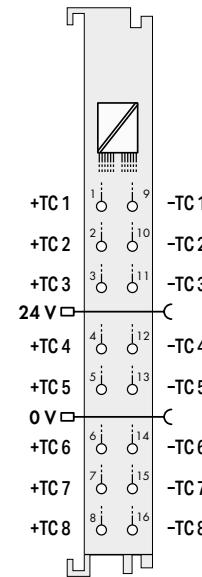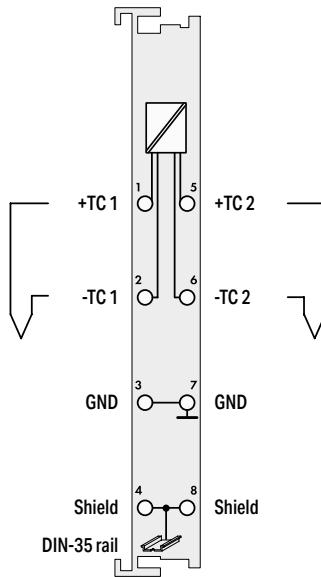

2-Channel Analog Input; Thermocouple; Diagnostics

Thermocouple S	Thermocouple T	Thermocouple J	Thermocouple E	Thermocouple L	Thermocouple $\pm 120 \text{ mV}$
750-469/000-001	750-469/000-002	750-469/000-006	750-469/000-008	750-469/000-012	750-469/000-003

2AI; TC S; Diagn 2AI; TC T; Diagn 2AI; TC J; Diagn 2AI; TC E; Diagn 2AI; TC L; Diagn 2AI; TC $\pm 120\text{mV}$; Diagn

8-Channel Analog Input; Thermocouple; Adjustable Standard

750-458
8AI; TC; Adjust

2

Thermocouple S Thermocouple T Thermocouple J Thermocouple E Thermocouple L $\pm 120 \text{ mV}$

-50 ... +1700 °C -100 ... +400 °C -100 ... +1200 °C -100 ... +1000 °C -100 ... +900 °C

0.1 °C

320 ms

$\pm 6 \text{ K}$ (voltage input: $\pm 2 \text{ K}$; cold junction compensation: $\pm 4 \text{ K}$)

$\pm 0.2 \text{ K/K}$

Integrated or external

65 mA

2 x 16-bit data; 2 x 8-bit control/status (optional)

500 V (system/field)

0 ... +55 °C

12 x 69.8 x 100 mm

CE; IP65; Marine; OrdLoc/HazLoc; ATEX/IECEx

wago.com/750-469

8

Thermocouple K;
Configurable: J; B; E; N; R; S; T; U; C;
Voltage measurement: -30 ... +30 mV;
-60 ... +60 mV; -120 ... +120 mV;
-240 ... +240 mV

Sensor-specific

0.1 °C

Per channel: $\leq 100 \text{ ms}$

Without cold junction compensation: $\pm 1 \text{ K}$ (type E, N, K, T, J, C); $\pm 2 \text{ K}$ (type S, R); $\pm 3 \text{ K}$ (type B);
Cold-junction compensation measurement error:
 $\pm 4 \text{ K}$

$\pm 0.05 \text{ K/K}$

Integrated or external

24 VDC (-25 ... +30 %); via power jumper contacts
(power supply via blade contact; transmission via spring contact)

100 mA

8 x 16-bit data; 8 x 8-bit control/status (optional)

500 V (system/field)

0 ... +55 °C

12 x 69.8 x 100 mm



CE; IP65; Marine; OrdLoc/HazLoc;

ATEX/IECEx

wago.com/750-458

Analog Input; for Resistor Bridges (Strain Gauge)

5.4

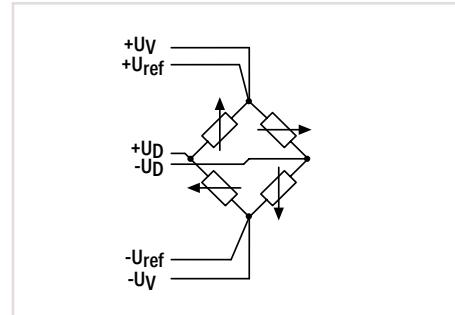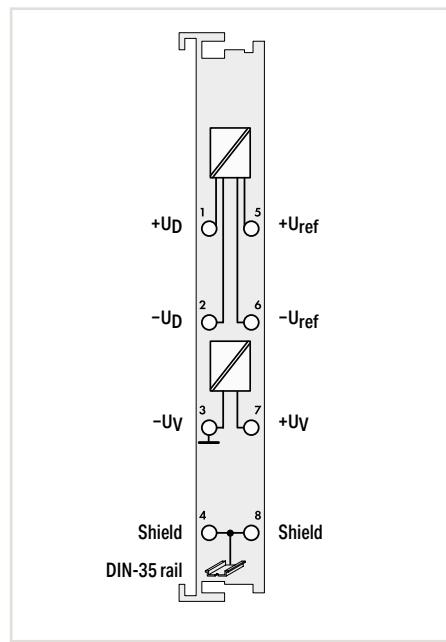

Item Description	1-Channel Analog Input; Resistor bridges (strain gauge)	
Version	Standard	Conversion time: 125 ms
Item No.	750-491	750-491/000-001
Order Text	1AI; DMS	


Technical Data

Number of analog inputs	1	
Signal type	Resistor bridge (strain gauge)	
Signal voltage U_D	-15 ... +15 mV	
Signal voltage U_{ref}	+2 ... +6 V	
Internal resistance	$> 200 \text{ k}\Omega (U_{ref})$; $> 1 \text{ M}\Omega (U_D)$	
Supply voltage U_v	5 VDC; 20 mA	
Resolution	16 bits	
Conversion time	500 ms	125 ms
Measuring error	$U_D: \pm 30 \mu\text{V}$; $U_{ref}: \pm 10 \text{ mV}$	
Filter	50 Hz	200 Hz
Current consumption – system supply (5 V)	65 mA	
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE; UL; CSA OrdLoc/HazLoc	
Data sheet and further information, see:	wago.com/750-491	

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 520 or www.wago.com


Analog Input; for 3-Phase Power Measurement

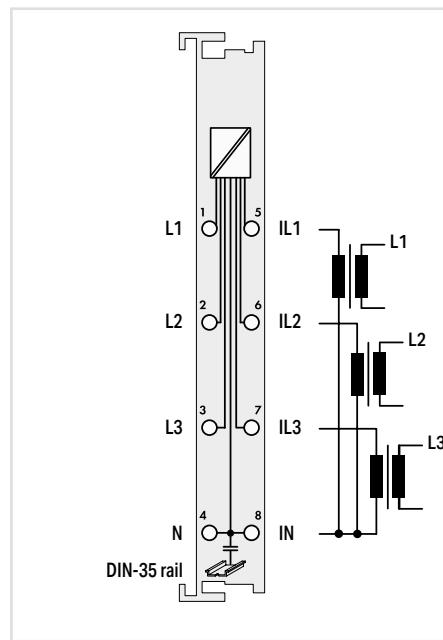

Item Description	
Version	
Item No.	
Order Text	3-PHASE POM; 3-PHASE POM; 480VAC 1A; T 480VAC 5A
Technical Data	
Signal type	3-phase power measurement
Measured variables	Voltage; Current; Effective power; Reactive power; Apparent power; Power consumption; Frequency; Cos phi
Number of measurement inputs	6 (3 voltage measurement inputs; 3 current measurement inputs)
Rated voltage	ULN = 277 VAC/VDC; ULL = 480 VAC
Input resistance (voltage path) typ.	1071 kΩ
Measuring current (max.)	1 A
Input resistance (current path) typ.	22 mΩ
Resolution	16 bits
Measuring error (max.) at 25 °C	AC current/voltage: ±0.5 % of the upper-range value ±0.6 % of the upper-range value ±0.5 % of the upper-range value
Frequency range (mains frequency)	45 ... 65 Hz
Limit frequency	7.2 kHz
Current consumption – system supply (5 V)	100 mA
Data width	2 x 48-bit data; 2 x 24-bit control/status (optional)
Isolation	4 kV (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE, UL, CSA OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-493
Accessories	
Split-core and plug-in current transformers	See Full Line Catalog, Volume 4

Analog Input; for 3-Phase Power Measurement

5.4

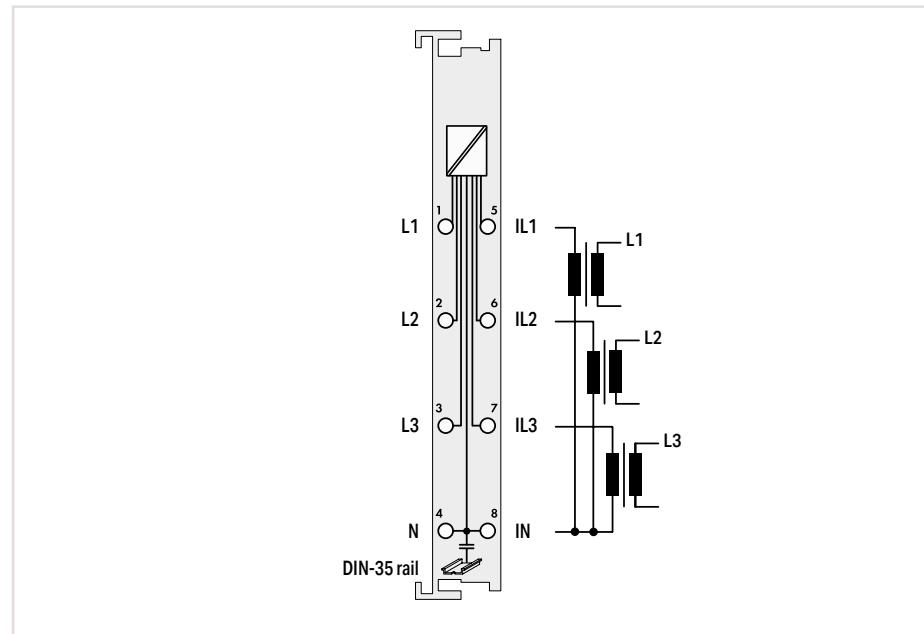


Item Description			
Version	3-Phase Power Measurement; 480 VAC 1 A		
Item No.	Standard	Extended temperature	480 VAC, 5 A
750-494	750-494/025-000	750-494/000-001	750-494/025-001
Order Text	3-PHASE POM; 480VAC 1A	3-PHASE POM; 480VAC 1A; T	3-PHASE POM; 480VAC 5A
Technical Data			
Signal type	3-phase power measurement		
Measured variables	Voltage; Current; Effective power; Reactive power; Apparent power; Power consumption; Frequency; Cos phi; Harmonics (up to the 41st harmonic); THD and more		
Number of measurement inputs	6 (3 voltage measurement inputs; 3 current measurement inputs)		
Rated voltage	ULN = 277 VAC/VDC; ULL = 480 VAC		
Input resistance (voltage path) typ.	1072 kΩ		
Measuring current (max.)	1 A	5 A	
Input resistance (current path) typ.	22 mΩ	5 mΩ	
Resolution	24 bits		
Measuring error (max.) at 25 °C	AC current/voltage: ±0.5 % the upper-range value		
Frequency range (mains frequency)	45 ... 65 Hz		
Frequency range (harmonics analysis)	0 ... 3300 Hz		
Limit frequency	15.9 kHz		
Current consumption – system supply (5 V)	100 mA		
Data width	2 x 128-bit data; 2 x 64-bit control/status		
Isolation	4 kV (system/field)		
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm		
Approvals	CE, UL, Marine; OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-494		
Accessories			
Split-core and plug-in current transformers	Item No. See Full Line Catalog, Volume 4		

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 520 or www.wago.com



Analog Input; for Power Measurement

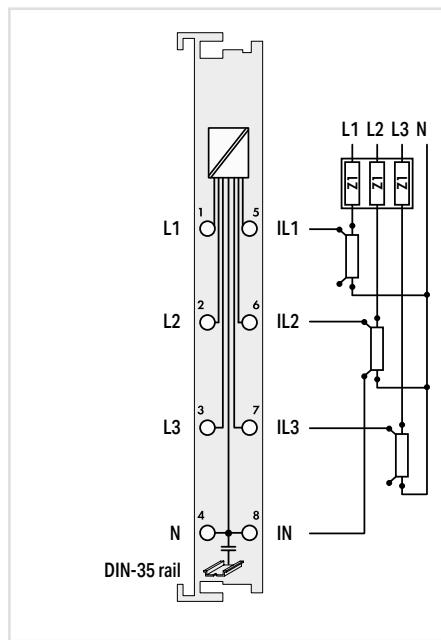

Item Description	Power Measurement
Version	277 VAC/DC; External shunts
Item No.	750-494/000-005
Order Text	Power Measurement; 277 VAC/DC; External shunts
Technical Data	
Signal type	Power Measurement
Measured variables	Line-to-line voltage; Power output; Energy; Power factors; Mains frequency; Harmonic analysis (up to the 41st harmonic); THD
Number of measurement inputs	6 (3 voltage measurement inputs*, 3 current measurement inputs*); *Only 2 voltage/current measurement inputs can be used for DC measurement!
Rated voltage	ULN = 277 VAC/VDC; ULL = 480 VAC
Input resistance (voltage path) typ.	1072 kΩ
Measuring current (max.)	1 ... 20,000 A via ext. shunts (DIN 43703, DIN EN 60051 [50 ... 300 mV])
Input resistance (current path) typ.	Approx. 15 kΩ
Resolution	24 bits
Measuring error for current and voltage	AC: 0.5 % (max.); DC: 1.0 % (of the upper-range value)
Frequency range (mains frequency)	45 ... 65 Hz
Frequency range (harmonics analysis)	0 ... 3300 Hz
Limit frequency	15.9 kHz
Current consumption – system supply (5 V)	100 mA
Data width	2 x 128-bit data; 2 x 64-bit control/status
Isolation	4 kV (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-494/000-005

Analog Input; for 3-Phase Power Measurement

5.4

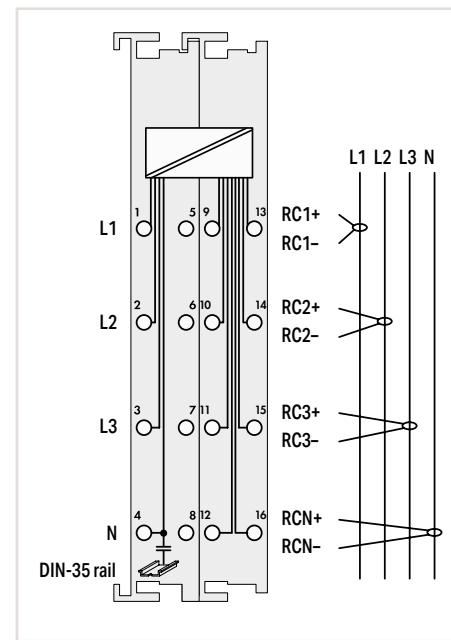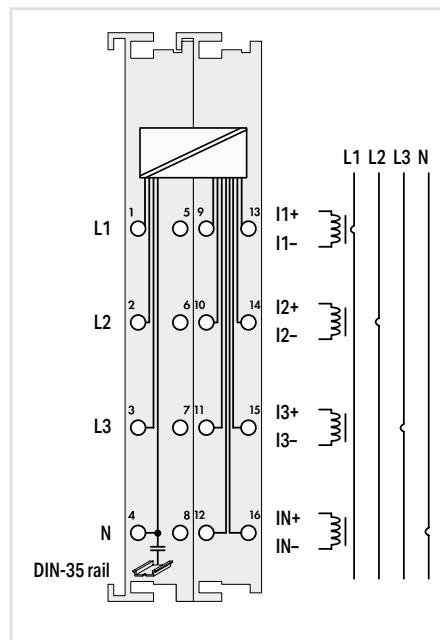

Item Description
Version
Item No.
Order Text

3-Phase Power Measurement; 690 VAC 1 A	
Standard	690 VAC 5 A
750-495	750-495/000-001

3-PHASE POM; 690VAC 1A 3-PHASE POM; 690VAC 5A

3-phase power measurement
690 VAC Rogowski coils
750-495/000-002

3-PHASE POM; 690VAC R.C.

Technical Data	
Signal type	3-phase power measurement
Measured variables	Voltage; Current; Effective power; Reactive power; Apparent power; Power consumption; Frequency; Cos phi; Harmonics (up to the 41st harmonic); THD;
Number of measurement inputs	Current measurement in N-conductor; and more
Rated voltage	7 (3 voltage measurement inputs; 4 differential current measurement inputs)
Input resistance (voltage path) typ.	$U_{LN} = 400 \text{ VAC}$; $U_{LL} = 690 \text{ VAC}$
Measuring current (max.)	1429 kΩ
Input resistance (current path) typ.	1 A 5 A
Resolution	22 mΩ 5 mΩ
Measuring error (max.) at 25 °C	24 bits
Frequency range (mains frequency)	AC current/voltage: ±0.5 % of the upper-range value
Frequency range (harmonics analysis)	45 ... 65 Hz
Limit frequency	0 ... 3300 Hz
Current consumption – system supply (5 V)	15.9 kHz
Data width	100 mA
Isolation	2 x 128-bit data; 2 x 64-bit control/status
Surrounding air temperature (operation)	6 kV (system/field)
Dimensions W x H x D	0 ... +55 °C
Approvals	24 x 69.8 x 100 mm
Data sheet and further information, see:	CE; UL; Marine

Accessories
Split-core and plug-in current transformers
Rogowski coils
Item No.
See Full Line Catalog, Volume 4

Item No.
See Full Line Catalog, Volume 4
Item No.
See Full Line Catalog, Volume 4
wago.com/750-495/000-002

- “ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"
- “ Approvals and corresponding ratings, see page 520 or www.wago.com

Analog Output Modules




Housing design (750 Series)

Dimensions W x H x D	12 x 69.8 x 100 mm
Height from upper-edge of DIN-rail	62.6 mm
Connection technology	CAGE CLAMP®
Conductor range	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

Housing design (753 Series)

Dimensions W x H x D	12 x 69.8 x 100 mm
Height from upper-edge of DIN-rail	62.6 mm
Connection technology	CAGE CLAMP®
Conductor range	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	9 ... 10 mm / 0.37 inch

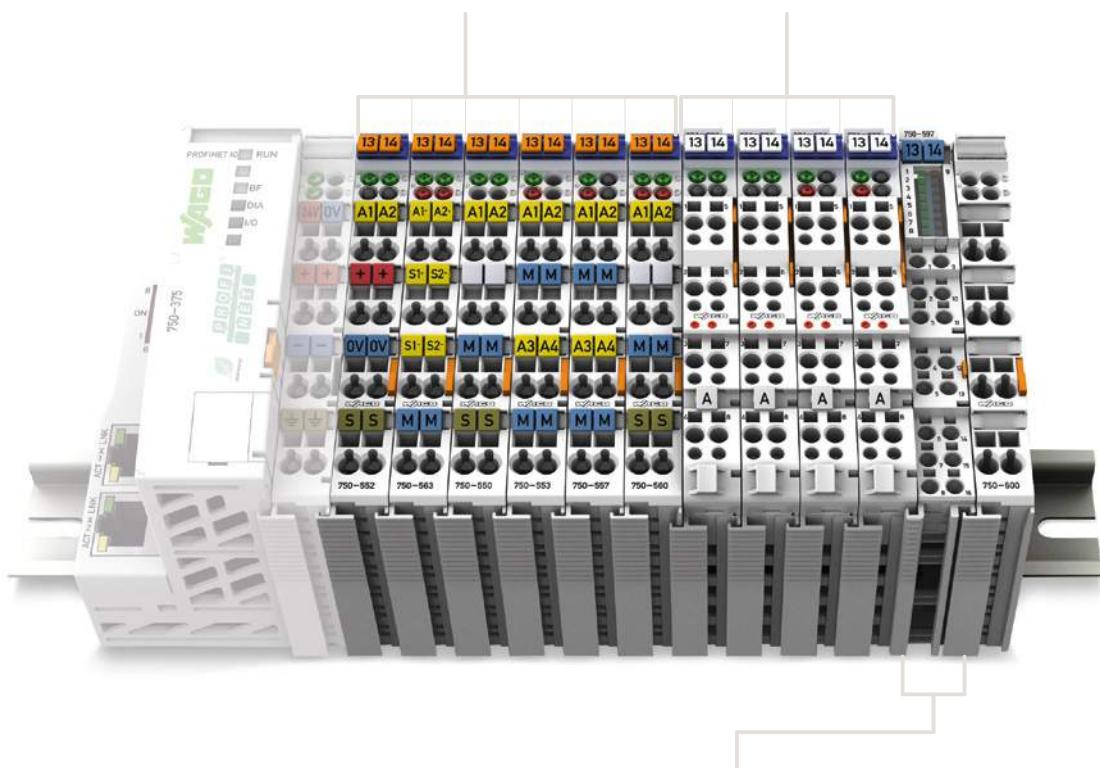

Housing design (750 Series), with Push-in CAGE CLAMP® connections (up to 16 connection points)

Dimensions W x H x D	12 x 69 x 100 mm
Height from upper-edge of DIN-rail	61.8 mm
Connection technology	Push-in CAGE CLAMP®
Conductor range	Solid: 0.08 ... 1.5 mm ² / 28 ... 16 AWG Fine-stranded: 0.25-1.5 mm ² / 22-16 AWG;
Strip length	8 ... 9 mm / 0.33 inch



I/O System – 750 and 753 Series; Analog Output Modules

Contents

Function	2-Channel AO	4-Channel AO	8-Channel AO	Description	Item Number				Page
					Standard	/S5 Customized Data Format	Extended Temperature	Pluggable	
0 ... 20 mA	■			2-Channel Analog Output; 0 ... 20 mA	750-552	750-552/000-200	750-552/025-000	753-552	248
		■		4-Channel Analog Output; 0 ... 20 mA	750-553			753-553	249
4 ... 20 mA	■			2-Channel Analog Output; 4 ... 20 mA	750-554	750-554/000-200	750-554/025-000	753-554	250
		■		4-Channel Analog Output; 4 ... 20 mA	750-555			753-555	251
0/4 ... 20 mA	■			2-Channel Analog Output; 0/4 ... 20 mA; 16 bits; 6 ... 18 VDC	750-563*				251
0 ... 10 V	■			2-Channel Analog Output; 0 ... 10 VDC	750-550	750-550/000-200		753-550	252
	■			2-Channel Analog Output; 0 ... 10 VDC; 10 bits; 100 mW/24 V	750-560				252
		■		4-Channel Analog Output; 0 ... 10 VDC	750-559*		750-559/025-000	753-559	253
±10 V	■			2-Channel Analog Output; ±10 VDC	750-556	750-556/000-200		753-556	254
		■		4-Channel Analog Output; ±10 VDC	750-557*			753-557	254
0 ... 10 V/±10 V	■			2-Channel Analog Output; 0 ... 10 VDC/±10 V; 16 bits	750-562				255
			■	8-Channel Analog Output; 0 ... 10 VDC/±10 V	750-597				255
Ex i					See Section 5.9				
*This module is also available as a 750 XTR Series variant.					See Section 6				

5.5
AO

Analog Output; 0 ... 20 mA


5.5



Figure: 750-552



Figure: 753-552

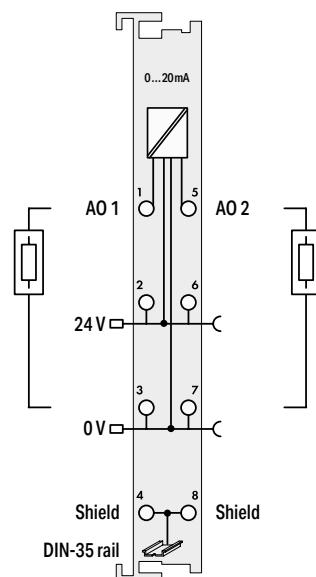

Item Description	2-Channel Analog Output; 0 ... 20 mA			
Version	Standard	Extended temperature	Pluggable (delivery without connector)	Data Format (S5 Control)
Item No.	750-552	750-552/025-000	753-552	750-552/000-200
Order Text	2AO; 0-20mA	2AO; 0-20mA; T	2AO; 0-20mA	2AO; 0-20mA; S5
Technical Data				
Pluggable connector			•	
Customized data format for S5 control*				•
Number of analog outputs	2			
Signal type	0 ... 20 mA			
Actuator connection	2-wire			
Load impedance	< 600 Ω			
Resolution	12 bits			
Conversion time	Approx. 2 ms			
Output error (max.) at 25 °C	±0.1 % of the upper-range value			
Temperature error (max.)	±0.01 % of the upper-range value			
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			
Current consumption – system supply (5 V)	70 mA			
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)			
Isolation	500 V (system/field)			
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm			
Approvals	CE; IC; Marine; OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-552	wago.com/753-552	wago.com/750-552	
Accessories	Item No.			
Pluggable connector	753-110			
Coding keys	753-150			

*The S5 format allows you to import data with the standard S5 FB 250 function block.

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 521 or www.wago.com


Analog Output; 0 ... 20 mA



Figure: 750-553



Figure: 753-553

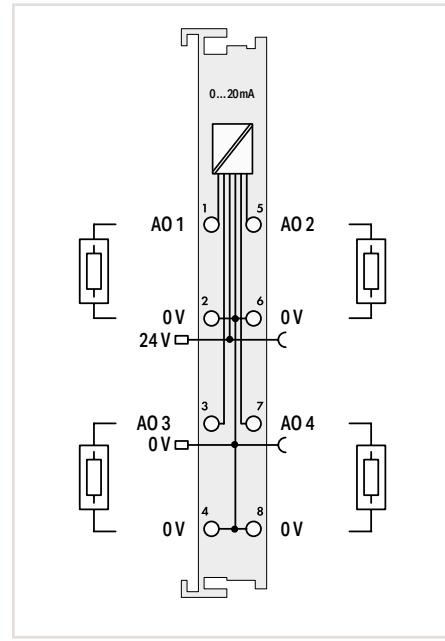

Item Description
Pluggable connector
Number of analog outputs
Signal type
Actuator connection
Load impedance
Resolution
Conversion time
Output error (max.) at 25 °C
Temperature error (max.)
Supply voltage (field)
Current consumption – system supply (5 V)
Data width
Isolation
Surrounding air temperature (operation)
Dimensions W x H x D
Approvals
Data sheet and further information, see:
Accessories
Pluggable connector
Coding keys

4-Channel Analog Output; 0 ... 20 mA	
Standard	Pluggable (delivery without connector)
750-553	753-553
4AO; 0-20mA	4AO; 0-20mA

●
4
0 ... 20 mA
2-wire
Either 0 ... 300 Ω or 300 ... 600 Ω (same resistance for all load impedances)
12 bits
10 ms
±0.1 % of the upper-range value
±0.01 % of the upper-range value
24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
60 mA
4 x 16-bit data; 4 x 8-bit control/status (optional)
500 V (system/field)
0 ... +55 °C
12 x 69.8 x 100 mm
CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx
wago.com/750-553 wago.com/753-553
Item No.
753-110
753-150

Analog Output; 4 ... 20 mA


5.5



Figure: 750-554



Figure: 753-554

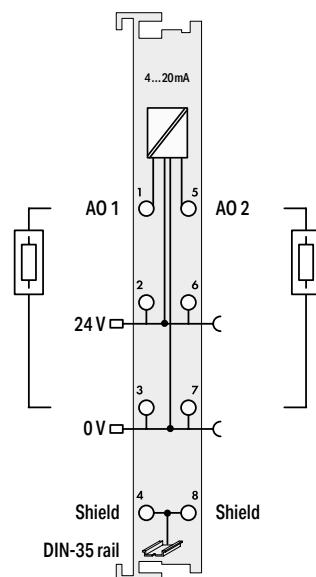

Item Description	2-Channel Analog Output; 4 ... 20 mA			
Version	Standard	Extended temperature	Pluggable (delivery without connector)	Data format (S5 control)
Item No.	750-554	750-554/025-000	753-554	750-554/000-200
Order Text	2AO; 4-20mA	2AO; 4-20mA; T	2AO; 4-20mA	2AO; 4-20mA; S5
Technical Data				
Pluggable connector			•	
Customized data format for S5 control*				•
Number of analog outputs	2			
Signal type	4 ... 20 mA			
Actuator connection	2-wire			
Load impedance	< 600 Ω			
Resolution	12 bits			
Conversion time	Approx. 2 ms			
Output error (max.) at 25 °C	±0.1 % of the upper-range value			
Temperature error (max.)	±0.015 %/K of the upper-range value			
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			
Current consumption – system supply (5 V)	70 mA			
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)			
Isolation	500 V (system/field)			
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm			
Approvals	CE; IC; Marine; OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-554	wago.com/753-554	wago.com/750-554	
Accessories	Item No.			
Pluggable connector	753-110			
Coding keys	753-150			

*The S5 format allows you to import data with the standard S5 FB 250 function block.

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 521 or www.wago.com



Analog Output; 4 ... 20 mA or Configurable 0/4 ... 20 mA; 6 ... 18 VDC



Figure: 750-555



Figure: 753-555

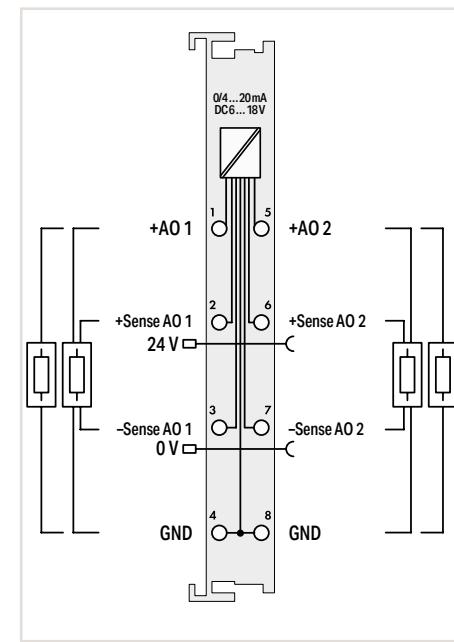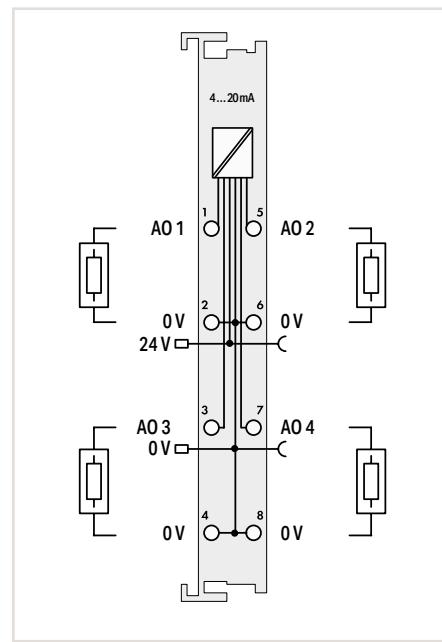

5.5

Item Description	4-Channel Analog Output; 4 ... 20 mA		2-Channel Analog Output; 0/4 ... 20 mA; 16 bits; 6 ... 18 VDC
Version	Standard	Pluggable (delivery without connector)	Standard
Item No.	750-555	753-555	750-563
Order Text	4AO; 4-20mA	4AO; 4-20mA	2AO; 0/4-20mA; 16bits; 6-18 VDC
Technical Data			
Pluggable connector		•	
Number of analog outputs	4	2	
Signal type	4 ... 20 mA	0 ... 20 mA; 4 ... 20 mA; 6 ... 18 V	
Actuator connection	2-wire	2-wire; 4-wire	
Load impedance	Either 0 ... 300 Ω or 300 ... 600 Ω (same resistance for all load impedances)	> 1.8 kΩ (voltage output); < 500 Ω (current output)	
Resolution	12 bits	16 bits	
Conversion time	10 ms	5 ms	
Output error (max.) at 25 °C	±0.1 % of the upper-range value	±0.05 % of the upper-range value	
Temperature error (max.)	±0.01 % of the upper-range value	±100 ppm	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	60 mA	80 ... 110 mA	
Data width	4 x 16-bit data; 4 x 8-bit control/status (optional)	2 x 16-bit data; 2 x 8-bit control/status (optional)	
Isolation	500 V (system/field)	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm	
Approvals	CE; UL; Marine; ATEX/IECEx	CE; UL; Marine; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-555	wago.com/753-555	wago.com/750-563
Accessories	Item No.		
Pluggable connector	753-110		
Coding keys	753-150		



Analog Output; 0 ... 10 VDC

5.5



Figure: 750-550

Figure: 753-550

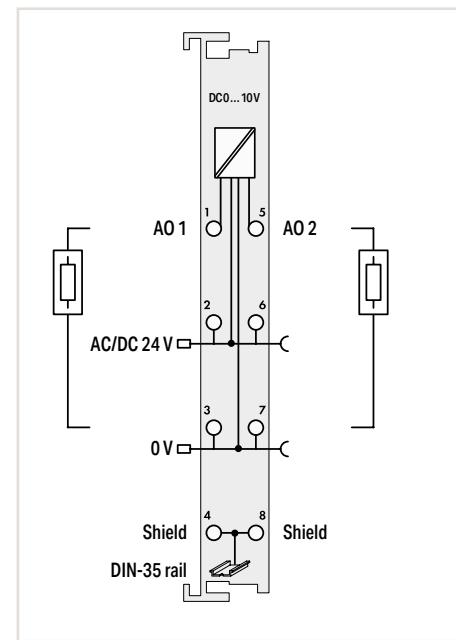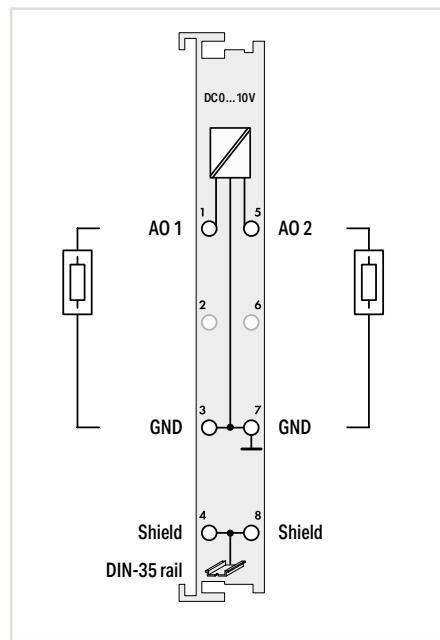

Item Description			2-Channel Analog Output; 0 ... 10 VDC			2-Channel Analog Output; 0 ... 10 VDC; 10 bits; 100 mW/24 V		
Version	Standard	Data format (S5 control)	Pluggable (delivery without connector)	Standard				
Item No.	750-550	750-550/000-200	753-550	750-560				
Order Text	2AO; 0-10 VDC	2AO; 0-10 VDC; S5	2AO; 0-10 VDC	2AO; 0-10 VDC; 10Bit; 100mW/ 24V				
Technical Data								
Pluggable connector			●					
Customized data format for S5 control*			●					
Number of analog outputs	2			2				
Signal type	0 ... 10 V			0 ... 10 V				
Actuator connection	2-wire			2-wire				
Load impedance	> 5 kΩ			≥ 1 kΩ				
Resolution	12 bits			10 bits				
Conversion time	Approx. 2 ms			Approx. 10 ms				
Output error (max.) at 25 °C	±0.1 % of the upper-range value			±0.2 % of the upper-range value				
Temperature error (max.)	±0.01 % of the upper-range value			±0.02 % of the upper-range value				
Supply voltage (field)				24 V AC/DC; via power jumper contacts (power supply via blade contact; transmission via spring contact)				
Current consumption – system supply (5 V)	65 mA			16 mA				
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)			2 x 16-bit data; 2 x 8-bit control/status (optional)				
Isolation	500 V (system/field)			500 V (system/field)				
Surrounding air temperature (operation)	0 ... +55 °C			0 ... +55 °C				
Dimensions W x H x D	12 x 69.8 x 100 mm			12 x 69.8 x 100 mm				
Approvals	CE; UL; Marine; UL OrdLoc/HazLoc; ATEX/IECEx			CE; UL; UL OrdLoc/HazLoc; ATEX/IECEx				
Data sheet and further information, see:	wago.com/750-550		wago.com/753-550	wago.com/750-560				
Accessories			Item No.					
Pluggable connector			753-110					
Coding keys			753-150					

*The S5 format allows you to import data with the standard S5 FB 250 function block.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 521 or www.wago.com


Analog Output; 0 ... 10 VDC



Figure: 750-559



Figure: 753-559

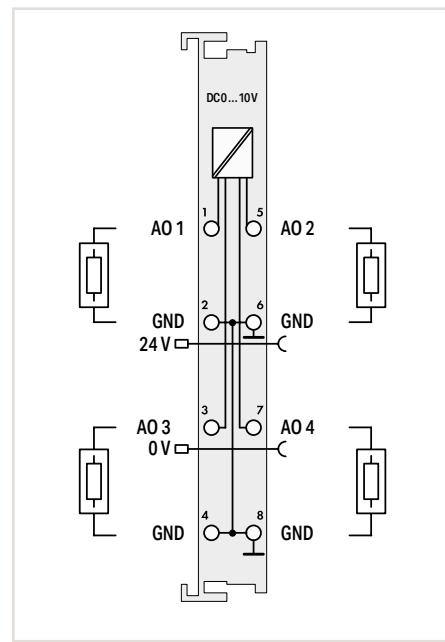

Item Description		
Version		
Item No.	750-559	750-559/025-000
Order Text	4AO; 0-10 VDC	4AO; 0-10 VDC; T

4-Channel Analog Output; 0 ... 10 VDC		
Standard	Extended temperature	Pluggable (delivery without connector)

Technical Data		
Pluggable connector		●
Number of analog outputs	4	
Signal type	0 ... 10 V	
Actuator connection	2-wire	
Load impedance	> 5 kΩ	
Resolution	12 bits	
Conversion time	10 ms	
Output error (max.) at 25 °C	±0.1 % of the upper-range value	
Temperature error (max.)	±0.01 % of the upper-range value	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	125 mA	
Data width	4 x 16-bit data; 4 x 8-bit control/status (optional)	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals		
Data sheet and further information, see:	wago.com/750-559	wago.com/753-559

Accessories	Item No.
Pluggable connector	753-110
Coding keys	753-150



Analog Output; ± 10 VDC

5.5



Figure: 750-556

Figure: 753-556

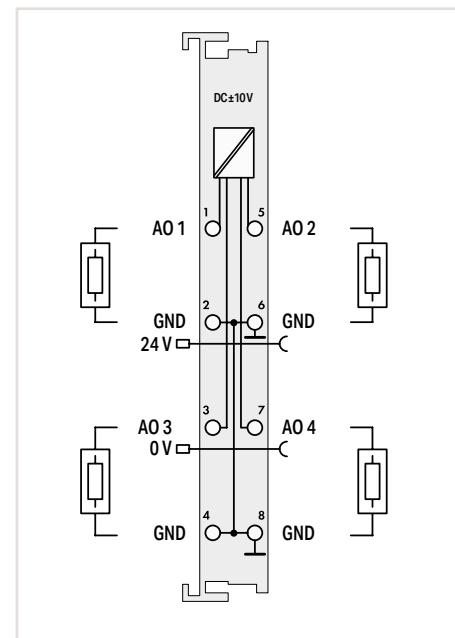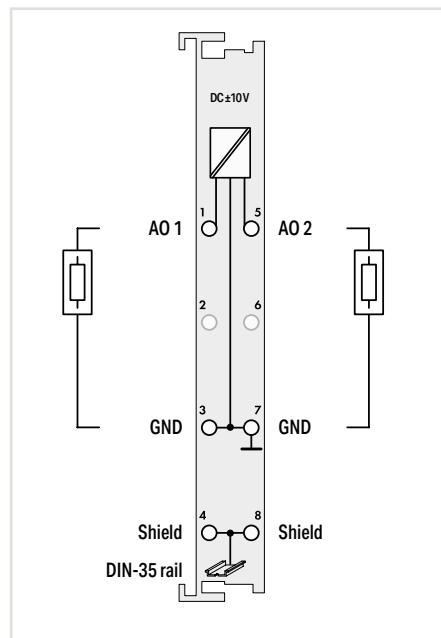

Item Description	2-Channel Analog Output; ± 10 VDC			4-Channel Analog Output; ± 10 VDC	
Version	Standard	Data format (S5 control)	Pluggable (delivery without connector)	Standard	Pluggable (delivery without connector)
Item No.	750-556	750-556/000-200	753-556	750-557	753-557
Order Text	2AO; ± 10 VDC	2AO; ± 10 VDC; S5	2AO; ± 10 VDC	4AO; ± 10 VDC	4AO; ± 10 VDC
Technical Data					
Pluggable connector			●		●
Customized data format for S5 control*		●			
Number of analog outputs	2			4	
Signal type	± 10 V			± 10 V	
Actuator connection	2-wire			2-wire	
Load impedance	> 5 k Ω			> 5 k Ω	
Resolution	12 bits			12 bits	
Conversion time	Approx. 2 ms			10 ms	
Output error (max.) at 25 °C	± 0.1 % of the upper-range value			± 0.1 % of the upper-range value	
Temperature error (max.)	± 0.01 % of the upper-range value			± 0.01 % of the upper-range value	
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			125 mA	
Current consumption – system supply (5 V)	65 mA			4 x 16-bit data; 4 x 8-bit control/status (optional)	
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)			500 V (system/field)	
Isolation	500 V (system/field)			0 ... +55 °C	
Surrounding air temperature (operation)	0 ... +55 °C			12 x 69.8 x 100 mm	
Dimensions W x H x D	12 x 69.8 x 100 mm			CE; IEC 60945; Marine; ATEX/IECEx	
Approvals	CE; IEC 60945; Marine; ATEX/IECEx			CE; IEC 60945; Marine; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-556	wago.com/753-556		wago.com/750-557	wago.com/753-557
Accessories			Item No.		
Pluggable connector			753-110		
Coding keys			753-150		

*The S5 format allows you to import data with the standard S5 FB 250 function block.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 521 or www.wago.com



Analog Output; Configurable 0 ... 10 VDC; ± 10 V



Figure: 750-562



Figure: 750-597

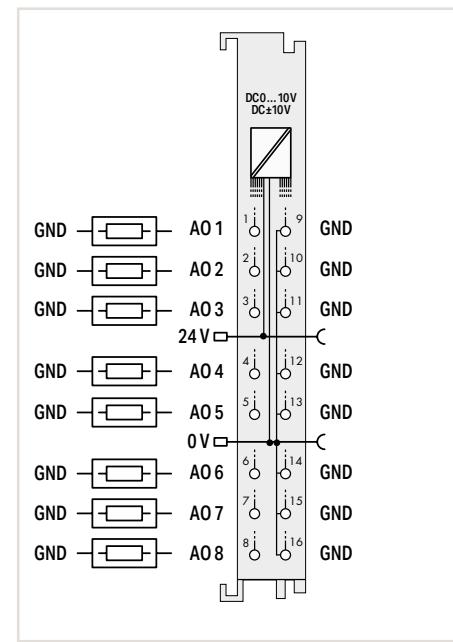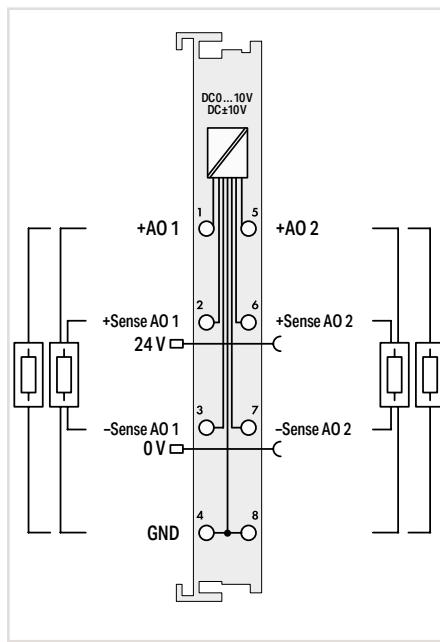

5.5

Item Description	2-Channel Analog Output; 0 ... 10 VDC/ ± 10 V; 16 bits	
Version	Standard	
Item No.	750-562	8-Channel Analog Output; 0 ... 10 VDC/ ± 10 V
Order Text	2AO; 0-10 V/ ± 10 VDC; 16bits	
Technical Data		
Number of analog outputs	2	8
Signal type	0 ... 10 V; ± 10 V	0 ... 10 V; ± 10 V
Actuator connection	2-wire; 4-wire	2-wire
Load impedance	> 5 k Ω	≥ 2 k Ω
Resolution	16 bits	12 bits
Conversion time	5 ms	13 ms
Output error (max.) at 25 °C	± 0.05 % of the upper-range value	± 0.1 % of the upper-range value
Temperature error (max.)	± 100 ppm	± 10 ppm/K of the upper-range value
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-15 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	80 ... 170 mA	61 mA
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)	8 x 16-bit data; 8 x 8-bit control/status (optional)
Isolation	500 V (system/field)	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69 x 100 mm
Approvals	CE; OrdLoc/HazLoc; ATEX/IECEx	CE;
Data sheet and further information, see:	wago.com/750-562	

Function/Technology Modules



Housing design (750 Series)


Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 67.8 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 60.6 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

Housing design (753 Series)

Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 69 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 61.8 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	9 ... 10 mm / 0.37 inch

Housing design (750 Series), double width

Dimensions W x H x D	24 x 69.8 x 100 mm
Height from upper-edge of DIN-rail	62.6 mm

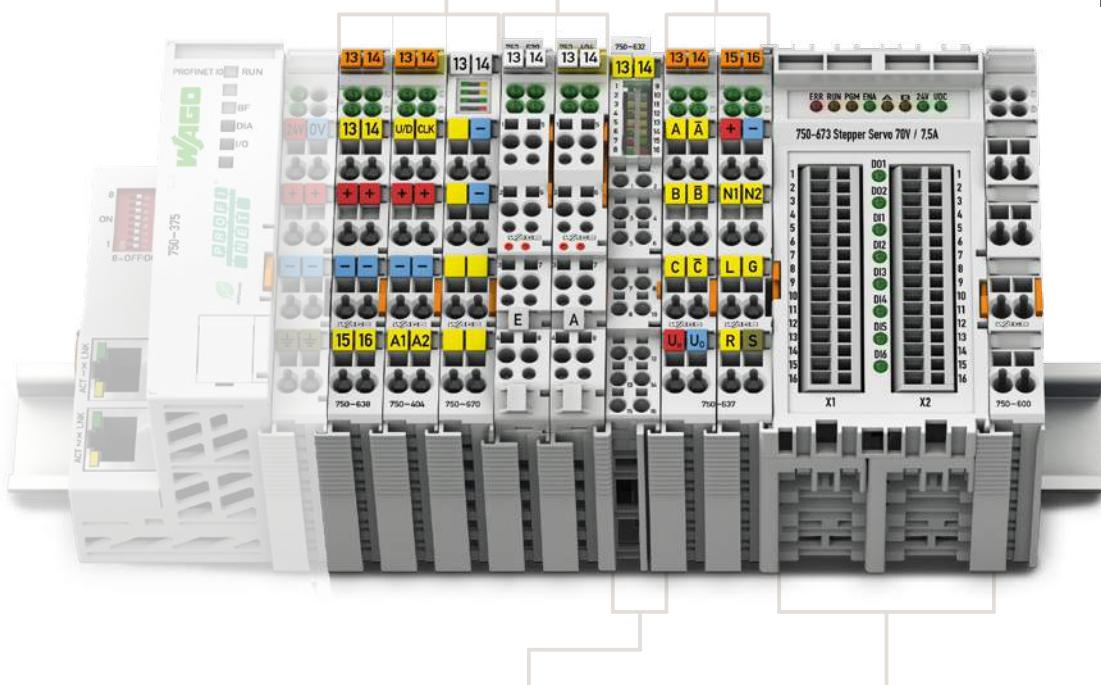

Housing design (750 Series), with Push-in CAGE CLAMP® connections (up to 16 connection points)

Dimensions W x H x D	12 x 69 x 100 mm
Height from upper-edge of DIN-rail	61.8 mm
Connection technology	Push-in CAGE CLAMP®
Conductor cross section	Solid: 0.08 ... 1.5 mm² / 28 ... 16 AWG Fine-stranded: 0.25–1.5 mm² / 22–16 AWG;
Strip length	8 ... 9 mm / 0.33 inch

Specialty housing

Dimensions W x H x D	51 x 69.8 x 100 mm
Height from upper-edge of DIN-rail	62.6 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 1.5 mm² / 28 ... 16 AWG
Strip length	5 ... 6 mm / 0.22 in



I/O System –
750 XTR Series



I/O System – 750 and 753 Series; Function/Technology Modules

Contents

Function	Description	Item Number			Page
		Standard	Extended Temperature	Pluggable	
Counter Modules	Up/Down Counter	750-404*		753-404	258
	Up Counter; Release input	750-404/000-001			258
	Peak-Time Counter	750-404/000-002			258
	Frequency Counter	750-404/000-003		753-404/000-003	259
	Up/Down Counter; Switch output	750-404/000-004			258
	2 Up Counters; 16 bits	750-404/000-005		753-404/000-005	259
	2 Up/Down Counters; 16 bits; 500 Hz	750-638	750-638/025-000	753-638	260
Pulse Width Outputs	2 Pulse Width Outputs; 24 VDC; 0.1 A; 250 kHz	750-511		753-511	261
	2 Pulse Width Outputs; 24 VDC; 0.1 A; 2 kHz; Frequency counter	750-511/000-001			261
	2 Pulse Width Outputs; 24 VDC; 0.1 A; 100 Hz	750-511/000-002			261
Distance and Angle Measurement	SSI Transmitter Interface; 24 bits; 125 kHz; Gray code	750-630			262
	SSI Transmitter Interface; 24 bits; 125 kHz; Bin. code	750-630/000-001			263
	SSI Transmitter Interface; 24 bits; 250 kHz; Bin. code	750-630/000-002			263
	SSI Transmitter Interface; 24 bits; 125 kHz; Gray code; Status byte	750-630/000-004			262
	SSI Transmitter Interface; 15 bits; 125 kHz; Gray code; Status byte	750-630/000-005			262
	SSI Transmitter Interface; 24 bits; 250 kHz; Gray code	750-630/000-006			263
	SSI Transmitter Interface; 25 bits; 125 kHz; Gray code	750-630/000-008			263
	SSI Transmitter Interface; 13 bits; 250 kHz; Bin. code	750-630/000-009			263
	SSI Transmitter Interface; 25 bits; 125 kHz; Bin. code	750-630/000-011			263
	SSI Transmitter Interface; 13 bits; 125 kHz; Gray code	750-630/000-012			263
	SSI Transmitter Interface; 29 bits; 125 kHz; Bin. code	750-630/000-013			263
	SSI Transmitter Interface; Adjustable	750-630/003-000*			262
	Incremental Encoder Interface; RS-422; 16 bits	750-631/000-004			264
	Incremental Encoder Interface; RS-422; 32 bits	750-637			264
	Incremental Encoder Interface; 24 VDC; Differential input; 32 bits	750-637/000-001*			265
	Incremental Encoder Interface; 24 VDC; Single-ended; 32 bits	750-637/000-002			265
	Incremental Encoder Interface; 5 VDC; 32 bits; Single evaluation	750-637/000-003			265
	Incremental Encoder Interface; 24 VDC; Single-ended; 32 bits; Cam output	750-637/000-004			265
	Digital Impulse Interface	750-635		753-635	266
RTC Module	Real-Time Clock Module	750-640			267
Vibration Monitoring	2-Channel Vibration Velocity/Bearing Condition Monitoring VIB I/O Module	750-645			268
Stepper Modules	Stepper Controller; RS-422/24 VDC; 20 mA	750-670			269
	Stepper Controller; 24 VDC; 1.5 A	750-671			270
	Stepper Controller; 70 VDC; 7.5 A	750-672			271
	Servo Stepper Controller; 55 VDC; 7.5 A	750-673			272
DC Drive Controllers	DC Drive Controller; 24 VDC; 5 A	750-636	750-636/025-000		273
	DC Drive Controller; 24 VDC; 5 A; External motor voltage	750-636/000-700			273
	DC Drive Controller; 24 VDC; 5 A; Interference-free	750-636/000-800			273
Proportional Valve Module	Proportional Valve Module	750-632			274
Ex i		See Section 5.9			
*This module is also available as a 750 XTR Series variant.		See Section 6			


Up/Down Counter; 100 kHz



Figure: 750-404



Figure: 753-404

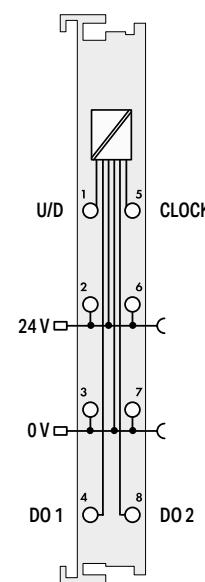

5.6

Up/Down Counter				
Item Description	Standard	Switch output	Pluggable (delivery without connector)	Up counter; Release input
Version				Peak-time counter
Item No.	750-404	750-404/000-004	753-404	750-404/000-001
Order Text	Up/Down Counter	Up/Down Counter; Switch Output	Up/Down Counter	Up Counter; Release Input
Technical Data				
Pluggable connector			•	
Number of outputs			2	
Number of counters			1	
Voltage range for signal (0)			-3 ... +5 VDC	
Voltage range for signal (1)			15 ... 30 VDC	
Output current			0.5 A; short-circuit-protected	
Switching frequency (max.)			100 kHz	10 kHz
Pulse width (min.)			6 mA	
Input current (typ.)				
Counter depth			32 bits	
Supply voltage (field)	5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			
Current consumption – system supply (5 V)	70 mA			
Data width (internal)	32-bit data; 8-bit control/status			
Isolation	500 V (system/field)			
Surrounding air temperature (operation)	0 ... +55 °C			
Dimensions W x H x D	12 x 69.8 x 100 mm			
Approvals	CE; UL; Marine; OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-404	wago.com/753-404	wago.com/750-404	
Accessories	Item No.			
Pluggable connector	753-110			
Coding keys	753-150			



Up/down counter: When the U/D input is switched with +24 V, the counting direction is upward. When an input is not switched or is 0 V, the counting direction is downward.

Up counter: The counting is locked when the GATE input is open or 0 V is present. Counting is enabled with +24 V at the GATE input.

Peak-time counter: The count pulses at the CLOCK input are recorded over a pre-set period of 10 seconds.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 522 or www.wago.com

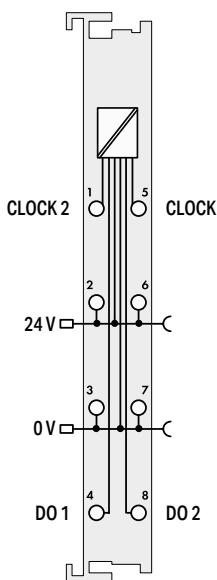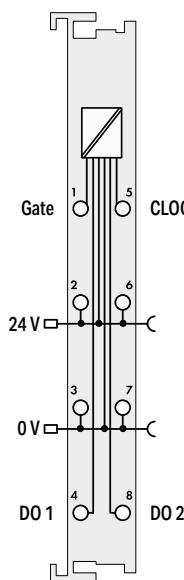

Frequency Counter

Standard	Pluggable (delivery without connector)
750-404/000-003	753-404/000-003
Frequency Counter; 100kHz	Frequency Counter; 100kHz

2 Up Counters; 16 bits

Standard	Pluggable (delivery without connector)
750-404/000-005	753-404/000-005

•	2
1	
-3 ... +5 VDC	
15 ... 30 VDC	
0.5 A; short-circuit-protected	
100 kHz	
10 µs	
5 mA	
32 bits	
5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
70 mA	
32-bit data; 8-bit control/status	
500 V (system/field)	
0 ... +55 °C	
12 x 69.8 x 100 mm	
CE; UL; Marine; ATEX/IECEx	
wago.com/ 750-404/000-003	wago.com/ 753-404/000-003

•	2
2	
-3 ... +5 VDC	
15 ... 30 VDC	
0.5 A; short-circuit-protected	
5 kHz (pulse width > 100 µs)	
5 mA	
2 x 16-bit data	
5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
70 mA	
32-bit data; 8-bit control/status	
500 V (system/field)	
0 ... +55 °C	
12 x 69.8 x 100 mm	
CE; UL; Marine; ATEX/IECEx	
wago.com/ 750-404/000-005	wago.com/ 753-404/000-005

The frequency counter measures the 24 V signal pulse period at the CLOCK input and converts it to a frequency value. The measurement is enabled when the GATE input is open or 0 V is present. Measurement is disabled when 24 V are present at the GATE input.

This module is equipped with two 16-bit up counters. The count pulses are recorded at the CLOCK 1 and CLOCK 2 inputs.


2 Up/Down Counters; 16 bits; 500 Hz



Figure: 750-638



Figure: 753-638

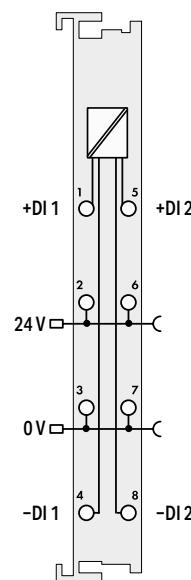

Item Description	2 Up/Down Counters; 16 bits; 500 Hz		
Version	Standard	Extended temperature	Pluggable (delivery without connector)
Item No.	750-638	750-638/025-000	753-638
Order Text	2Up/Down Counter; 16bits; 500Hz	2Up/Down Counter; 16bits; 500Hz; T	2Up/Down Counter; 16bits; 500Hz
Technical Data			
Pluggable connector			●
Number of outputs		2	
Number of counters		2	
Voltage range for signal (0)		-3 ... +5 VDC	
Voltage range for signal (1)		15 ... 30 VDC	
Switching frequency (max.)		500 Hz	
Pulse width (min.)		1 ms	
Counter depth		16 bits	
Supply voltage (field)	5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption – system supply (5 V)	10 mA		
Data width (internal)	2 x 16-bit data; 2 x 8-bit control/status		
Isolation	500 V (system/field)		
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm		
Approvals	CE; KC; OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-638	wago.com/753-638	
Accessories			
Pluggable connector		Item No.	753-110
Coding keys			753-150

“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 522 or www.wago.com


Pulse Width Output



Figure: 750-511



Figure: 753-511

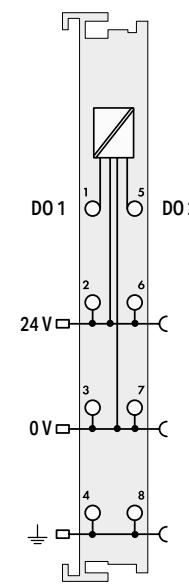


5.6

Item Description	2 Pulse Width Outputs; 24 VDC; 0.1 A; 250 Hz		
Version	Standard	Pluggable (delivery without connector)	2 kHz; Frequency counter
Item No.	750-511	753-511	750-511/000-001
Order Text	2PWM; 24 VDC; 0.1A; 250Hz	2PWM; 24 VDC; 0.1A; 250Hz	2PWM; 24 VDC; 0.1A; 2kHz; Frequency Counter
Technical Data			
Pluggable connector		●	
Number of outputs		2	
Load type	Resistive; inductive		
Pulse frequency	250 Hz	2 Hz ... 2 kHz	100 Hz
Duty cycle	0 ... 100 %	50 %	0 ... 100 %
Output current	0.1 A; short-circuit-protected		
Resolution	10 bits		
Supply voltage (field)	5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		
Current consumption – system supply (5 V)	70 mA		
Data width (internal)	2 x 16-bit data; 2 x 8-bit control/status		
Isolation	500 V (system/field)		
Surrounding air temperature (operation)	0 ... +55 °C		
Dimensions W x H x D	12 x 69.8 x 100 mm		
Approvals	CE; UL; CSA; OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-511	wago.com/753-511	wago.com/750-511/000-001
Accessories			
Pluggable connector	753-110		
Coding keys	753-150		

SSI Transmitter Interface



Figure: 750-630

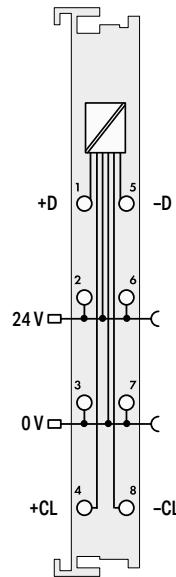


Item Description	SSI Transmitter Interface			
Version	Adjustable	24 Bits; 125 kHz; Gray Code	24 Bits; 125 kHz; Gray Code; Status Byte	15 Bits; 125 kHz; Gray Code; Status Byte
Item No.	750-630/003-000	750-630	750-630/000-004	750-630/000-005
Order Text	SSI Interface; adjust	SSI Interface; 24bits; 125kHz; Gray	SSI Interface; 24bits; 125kHz; Gray; Status	SSI Interface; 15bits; 125kHz; Gray; Status

Technical Data

Encoder connection	On + D; - D; Off + Cl; - Cl				
Encoder supply	24 VDC; via power jumper contacts				
Transmission rate	62.5 ... 250 kHz	125 kHz			
Serial input	Data width: 1 ... 32 bits	Data width: 24 bits	Data width: 15 bits		
Signal output	Differential signal (RS-422)				
Signal input	Differential signal (RS-422)				
Code	Gray code/binary code	Gray code			
Supply voltage (field)	5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)				
Current consumption – system supply (5 V)	20 mA				
Data width (internal)	1 x 32 bits	1 x 32-bit; 1 x 8-bit control/status (optional)			
Isolation	500 V (system/field)				
Surrounding air temperature (operation)	0 ... +55 °C				
Dimensions W x H x D	12 x 69.8 x 100 mm				
Approvals	CE; IP67; Marine; OrdLoc/HazLoc; ATEX/IECEx				
Data sheet and further information, see:	wago.com/750-630				

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 522 or www.wago.com

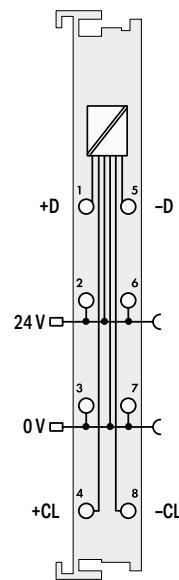

SSI Transmitter Interface

24 Bits; 250 kHz; Gray Code	25 Bits; 125 kHz; Gray Code	13 Bits; 125 kHz; Gray Code	24 Bits; 125 kHz; Bin. Code	25 Bits; 125 kHz; Bin. Code	29 Bits; 125 kHz; Bin. Code	24 Bits; 250 kHz; Bin. Code	13 Bits; 250 kHz; Bin. Code
750-630/000-006	750-630/000-008	750-630/000-012	750-630/000-001	750-630/000-011	750-630/000-013	750-630/000-002	750-630/000-009
SSI Interface; 24bits; 250kHz; Gray	SSI Interface; 25bits; 125kHz; Gray	SSI Interface; 13bits; 125kHz; Gray	SSI Interface; 24bits; 125kHz; Bin	SSI Interface; 25bits; 125kHz; Bin	SSI Interface; 29bits; 125kHz; Bin	SSI Interface; 24bits; 250kHz; Bin	SSI Interface; 13bits; 250kHz; Bin

On + D; - D; Off + CL; - CL

24 VDC; via power jumper contacts

250 kHz	125 kHz	250 kHz
Data width: 24 bits	Data width: 25 bits	Data width: 13 bits

Differential signal (RS-422)

Differential signal (RS-422)

Gray code

Binary code

5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)

20 mA

1 x 32 bits

500 V (system/field)

0 ... +55 °C

12 x 69.8 x 100 mm



CE; IP67; Marine; OrdLoc/HazLoc; ATEX/IECEx

wago.com/750-630

Incremental Encoder Interface





Figure: 750-631/000-004

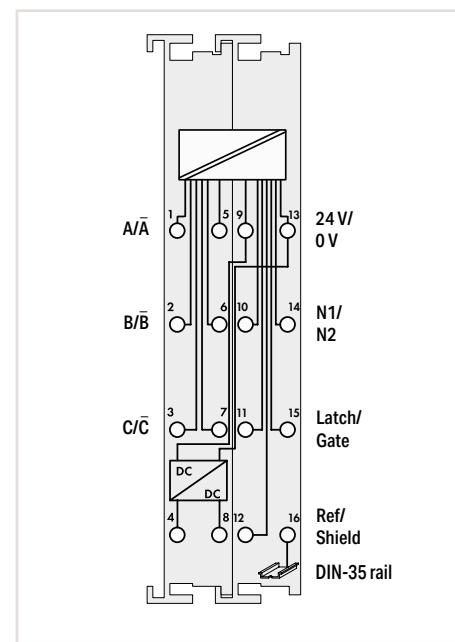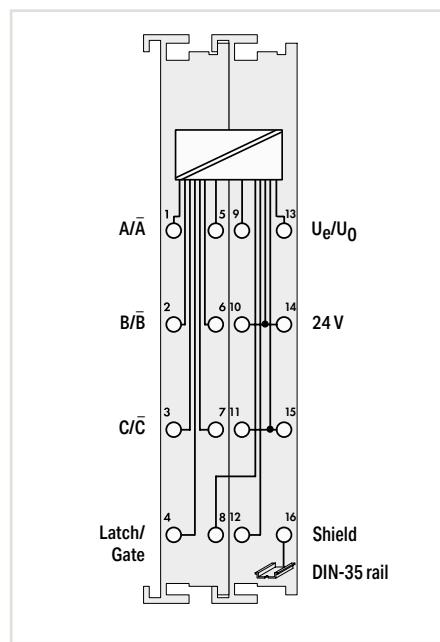

Item Description	Incremental Encoder Interface; RS-422; 16 bits	
Version	Standard	
Item No.	750-631/000-004	750-637
Order Text	Inc. Encoder; RS422; 16bits	
Technical Data		
Encoder connection	A; /A; B; /B; C; /C (RS-422 inputs)	A; /A; B; /B; C; /C (RS-422 inputs)
Counter Modules	16 bits (binary)	32 bits (binary)
Limit frequency	1000 kHz	250 kHz
Quadrature decoder	4x evaluation	4x evaluation
Zero impulse latch	16 bits	32 bits
Commands	Reading; setting; activating	Reading; setting; activating
Current consumption (typ.)	10 mA; without encoder	35 mA; without encoder
Encoder operating voltage	5 VDC	5 VDC
Encoder output current (max.)	200 mA	300 mA
Output voltage		24 VDC
Output current (max.)		0.5 A; short-circuit-protected
Voltage range for signal (0)	$U_{ABC} = 0 \text{ V}; U_{ABC/} = 5 \text{ V}$; Latch, gate $\leq 5.0 \text{ V}$; External error $U \geq 5.0 \text{ V}$ or open input	$U_{ABC} = \text{RS-422}$; Latch, Gate, Ref.: $-3 \dots +5 \text{ VDC}$
Voltage range for signal (1)	$U_{ABC} = 5 \text{ V}; U_{ABC/} = 0 \text{ V}$; Latch, gate $\geq 15.0 \text{ V}$; External error $U < 0.5 \text{ V}$	$U_{ABC} = \text{RS-422}$; Latch, Gate, Ref.: $15 \dots 30 \text{ VDC}$
Input current (typ.)		Latch 5 mA; Gate 7 mA; Ref. 7 mA
Current consumption – system supply (5 V)	50 mA	110 mA
Data width (internal)	2-byte output; 5-byte input 2x 8-bit control/status (optional) 3 additional output bytes (reserved)	1 x 32-bit data; 2 x 8-bit control/status
Isolation	500 V (system/field)	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	24 x 69.8 x 100 mm	24 x 69.8 x 100 mm
Approvals	CE; IEC; UL OrdLoc/HazLoc	CE; IEC; UL Marine; IEC; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-631/000-004	

“ Mini-WSB marker card and mounting accessories,
see Section “Accessories and Tools”

“ Approvals and corresponding ratings,
see page 522 or www.wago.com

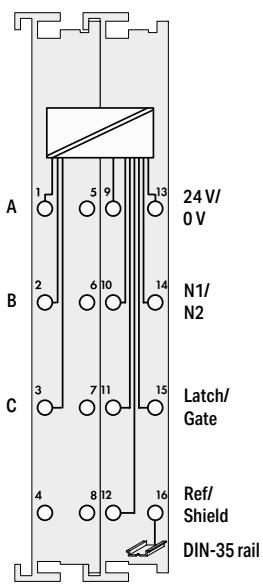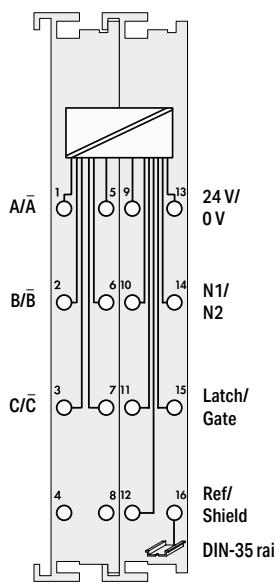

Incremental Encoder Interface; 24 VDC; Differential input; 32 bits

Standard

750-637/000-001

Inc. Encoder; 24 VDC; Diff; 32bits

Incremental Encoder Interface; 24 VDC; Single-ended; 32 bits

Standard

750-637/000-002

Inc. Encoder; 24 VDC; SE; 32bits

A; /A; B; /B; C; /C (differential inputs)

32 bits (binary)

250 kHz

4x evaluation

32 bits

Reading; setting; activating

35 mA; without encoder

24 VDC

300 mA

24 VDC

0.5 A; short-circuit-protected

($U_{ABC} - U_{ABC}$): -30 ... +15 VDC;
Latch, Gate, Ref.: -3 ... +5 VDC

($U_{ABC} - U_{ABC}$): 15 ... 30 VDC;
Latch, Gate, Ref.: 15 ... 30 VDC

Latch 5 mA; Gate 7 mA; Ref. 7 mA

110 mA

1 x 32-bit data; 2 x 8-bit control/status

A; B; C (single-ended inputs)

32 bits (binary)

250 kHz

4x evaluation

32 bits

Reading; setting; activating

35 mA; without encoder

24 VDC

300 mA

24 VDC

0.5 A; short-circuit-protected

-3 ... +5 VDC

15 ... 30 VDC

Latch 5 mA; Gate 7 mA; Ref. 7 mA

110 mA

1 x 32-bit data; 2 x 8-bit control/status

500 V (system/field)

0 ... +55 °C

24 x 69.8 x 100 mm

ATEX/IECEx

wago.com/750-637

500 V (system/field)

0 ... +55 °C

24 x 69.8 x 100 mm

ATEX/IECEx

wago.com/750-637


Digital Impulse Interface



Figure: 750-635



Figure: 753-635

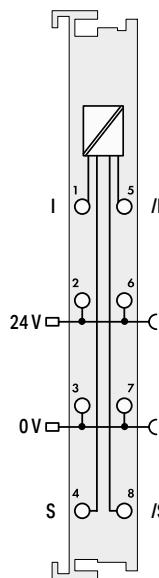

5.6

Item Description	Digital Impulse Interface	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-635	753-635
Order Text	Digital impulse interface	Digital impulse interface
Technical Data		
Pluggable connector	● Start/stop; Initialization; U _v ; Ground; Shield connection via encoder housing	
Encoder connection	1	RS-422
Number of inputs	Differential signal (RS-422)	
Data transmission	Differential signal (RS-422)	
Signal output	1 μm	
Signal input	2 ms	
Resolution	≤ 4 m	
Update time	500 m	
Position sensor length	24 VDC (-15 % ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Line length (max.)	45 mA	
Supply voltage (field)	1 x 24-bit data; 1 x 8-bit control/status	
Current consumption – system supply (5 V)	500 V (system/field)	
Data width (internal)	0 ... +55 °C	
Isolation	12 x 69.8 x 100 mm	
Surrounding air temperature (operation)	CE; KC; OrdLoc/HazLoc; ATEX/IECEx	
Dimensions W x H x D	wago.com/750-635	wago.com/753-635
Approvals		
Data sheet and further information, see:		
Accessories		
Pluggable connector	Item No.	
Coding keys	753-110	753-150

This digital impulse interface connects position sensors equipped with a start/stop interface. After receiving a read pulse, these sensors deliver a time-delayed reply impulse. The time delay is proportional to the sensor distance. Each sensor may have up to four position transmitters (permanent magnets). Their position data can be accessed serially by the control and are stored in the process image of the fieldbus coupler as a 24-bit value.


Position sensors, from manufacturers such as Balluff, with the following features can be used:

- Start/stop interface with RS-422 differential signals
- 24 V sensor supply

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 522 or www.wago.com

Real-Time Clock Module

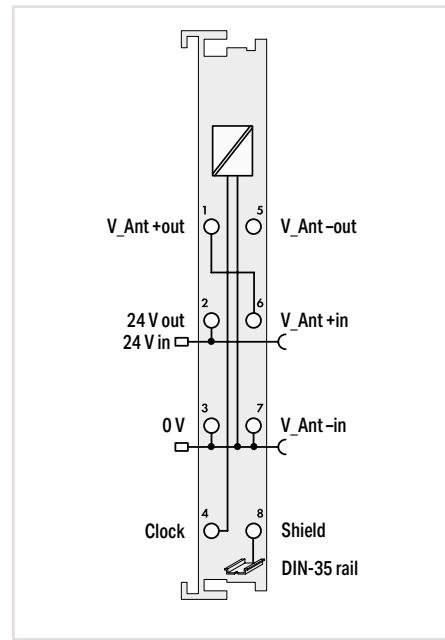

Item Description	Real-Time Clock Module
Version	Standard
Item No.	750-640
Order Text	RTC Module
Technical Data	
Drift (clock)	< 2 min./year
Buffer length	> 6 days
Timer	32 channels and switch points (32 x on/off)
Voltage range for signal (0)	-24 ... +1 V
Voltage range for signal (1)	3 ... 24 V
Input filter	10 ms
Supply voltage (field)	5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	20 mA
Data width (internal)	1 x 40-bit data (input/output); (5-byte user data); 1 x 8-bit control/status (optional)
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-640


This RTC module provides higher-level control systems with the actual time. The time is buffered and continues to run in the event of a power failure. When an external receiver is connected, the clock can be set using the time signal from DCF77, WWVB, or MSF.

By default, the module is set to receive DCF77 signals. The receiver can be supplied directly via the module.

Connecting an external receiver to operate the RTC module is not absolutely necessary.

2-Channel Vibration Velocity/Bearing Condition Monitoring VIB I/O Module

5.6

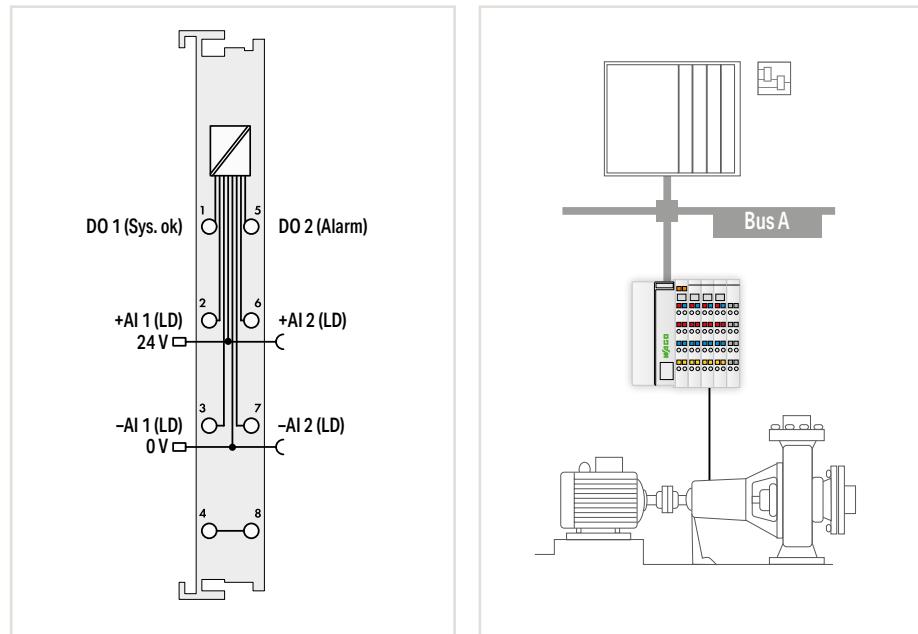



Item Description	2-Channel Vibration Velocity/Bearing Condition Monitoring VIB I/O Module
Version	750-645
Item No.	2VIB VRMS/SPM Multi
Order Text	
Technical Data	
Encoder inputs	+AI1; -AI1; +AI2; -AI2
Number of inputs	2
Oscillating velocity (RMS)	0 ... 100 mm/s
Shock impulse (SPM)	-10 ... +80 dbSV
Number of outputs	2 (alarm and system OK)
Configuration	Both alarm and warning threshold can be set via process image and engineering software.
Outputs	24 VDC; 0.5 A; short-circuit protected
Supply voltage (field)	24 VDC (-15 % ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	30 mA
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm
Approvals	CE; KC; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-645
Accessories	Item No.
Tandem-piezo acceleration sensor	750-925

This module is used for online monitoring of machine vibration levels. It records the two key parameters required for condition monitoring: vibration velocity and bearing condition. Vibration velocity is a measurement for machines' energy and therefore, a suitable indicator for the vibration forces acting on the machine. Bearing condition is evaluated on the basis of high-frequency shock impulse signals. Shock impulses are momentary impulses arising from mechanical damage to roller bearings or the bearing surfaces. By recording the measurement results and evaluation in a trend curve, bearing damage can be detected at an early stage. A special Tandem-Piezo® acceleration sensor serves as encoder to facilitate simultaneous measurement of machine vibrations and high-frequency shock impulse signals.

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 522 or www.wago.com

Stepper Controller

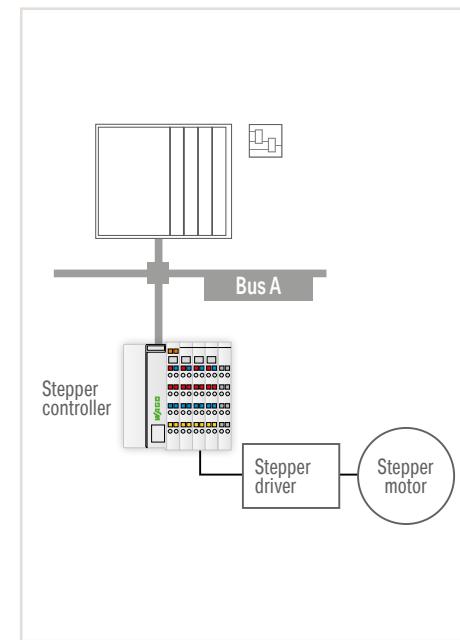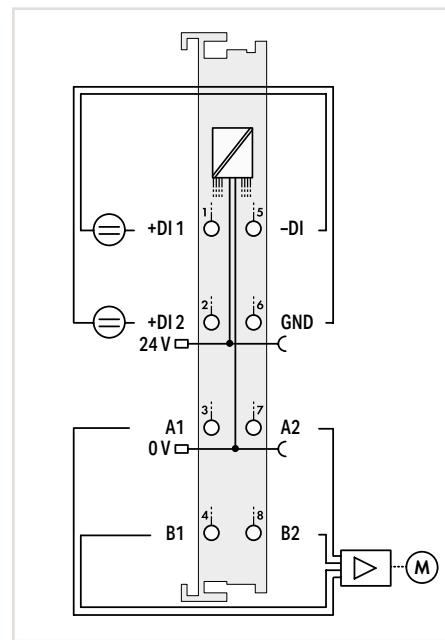

5.6

Item Description	Stepper Controller; RS-422/24 VDC; 20 mA
Version	Standard
Item No.	750-670
Order Text	Stepper Controller; RS422/24 VDC; 20mA
Technical Data	
Number of outputs	1 channel (2 differential outputs A1; A2; B1; B2)
Signal voltage	5 VDC (internal); 5 ... 24 VDC (external)
Load type	RS-422; TTL; Optocoupler
Output current (max.)	30 mA; short-circuit-protected
Output frequency	200 µHz ... 500 kHz
Number of inputs	2 x 24 VDC
Voltage range for signal (0)	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC
Input filter	100 µs; software filter can be connected
Resolution	Path: 23 bits + sign bit; Speed: 15 bits + 16-bit prescaler; Acceleration: 15 bits + 16-bit prescaler
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	98 mA
Data width (internal)	12-byte input/output
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm
Approvals	CE; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-670

Item Description	Stepper Controller; RS-422/24 VDC; 20 mA
Version	Standard
Item No.	750-670
Order Text	Stepper Controller; RS422/24 VDC; 20mA
Technical Data	
Number of outputs	1 channel (2 differential outputs A1; A2; B1; B2)
Signal voltage	5 VDC (internal); 5 ... 24 VDC (external)
Load type	RS-422; TTL; Optocoupler
Output current (max.)	30 mA; short-circuit-protected
Output frequency	200 µHz ... 500 kHz
Number of inputs	2 x 24 VDC
Voltage range for signal (0)	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC
Input filter	100 µs; software filter can be connected
Resolution	Path: 23 bits + sign bit; Speed: 15 bits + 16-bit prescaler; Acceleration: 15 bits + 16-bit prescaler
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	98 mA
Data width (internal)	12-byte input/output
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm
Approvals	CE; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-670

This stepper controller is used to control different drive power sections with pulse/direction interface or incremental encoder input.

The 64-fold microstepping prevents step losses due to resonance in the acceleration phases and reduces wear on the mechanical parts. Adjustable current limits for stop, acceleration and constant speed help minimize motor power dissipation. Two configurable inputs for Start/Stop, limit switches, reference cams, Jog/Tip, etc., are evaluated directly and without any further delay by the internal software.

Versatile functions, such as positioning with different acceleration slopes, command tables, camshaft controller, auto referencing and other event-dependent properties provide this controller with a wide spectrum of possible uses.

Operating modes:

- Step positioning
- Reference motion
- Jog
- Tip
- Command table
- Cam switch

Functions include:



- Absolute/relative positioning
- Setpoint change on the fly
- Rotary axis

Additional operating modes:

- Pulse width modulation
- Frequency generator
- Single-shot mode

Stepper Controller

5.6

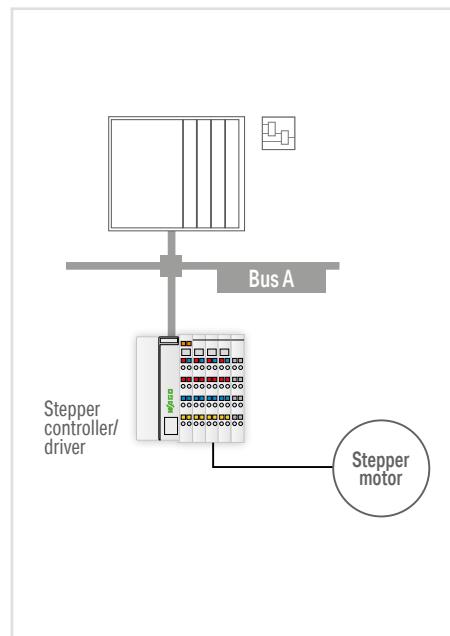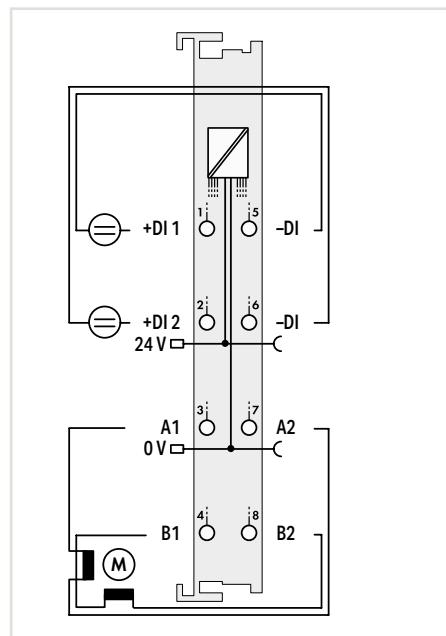

Item Description	Stepper Controller; 24 VDC; 1.5 A
Version	Standard
Item No.	750-671
Order Text	Stepper Controller; 24 VDC; 1.5 A
Technical Data	
Number of outputs	1 stepper motor (2-phase/bipolar)
Output current (max.)	Up to 2 x 1.5 A peak value; 1 A rms
Output frequency	7812 Hz
Number of inputs	2 x 24 VDC
Voltage range for signal (0)	-3 ... +5 VDC
Voltage range for signal (1)	15 ... 30 VDC
Input filter	100 µs; software filter can be connected
Resolution	Path: 23 bits + sign bit; Speed: 15 bits + 16-bit prescaler; Acceleration: 15 bits + 16 bit- prescaler
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	85 mA
Data width (internal)	12-byte input/output
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm
Approvals	CE; ATEX/IECEx
Data sheet and further information, see:	

This stepper controller has an on-board power driver designed to control 2-phase stepper motors up to 24 V/1.5 A.

The 64-fold microstepping prevents step losses due to resonance in the acceleration phases and reduces wear on the mechanical parts. Adjustable current limits for stop, acceleration and constant speed help minimize motor power dissipation. Two configurable inputs for Start/Stop, limit switches, reference cams, Jog/Tip, etc., are evaluated directly and without any further delay by the internal software.

Versatile functions, such as positioning with different acceleration slopes, command tables, camshaft controller, auto referencing and other event-dependent properties provide this controller with a wide spectrum of possible uses.

Operating modes:

- Step positioning
- Reference motion
- Jog
- Tip
- Command table
- Cam switch



Functions include:

- Absolute/relative positioning
- Setpoint change on the fly
- Rotary axis

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 522 or www.wago.com

Stepper Controller

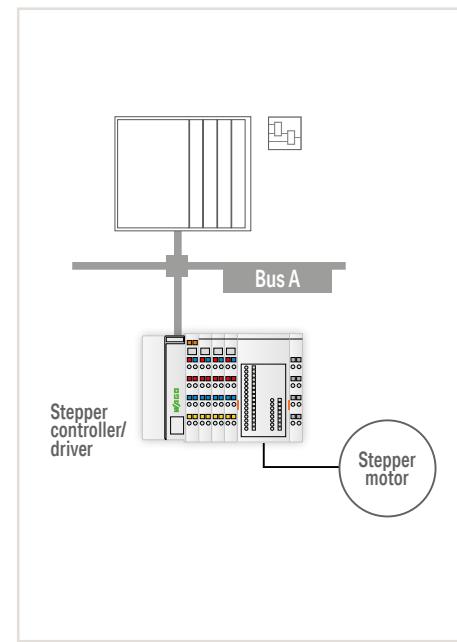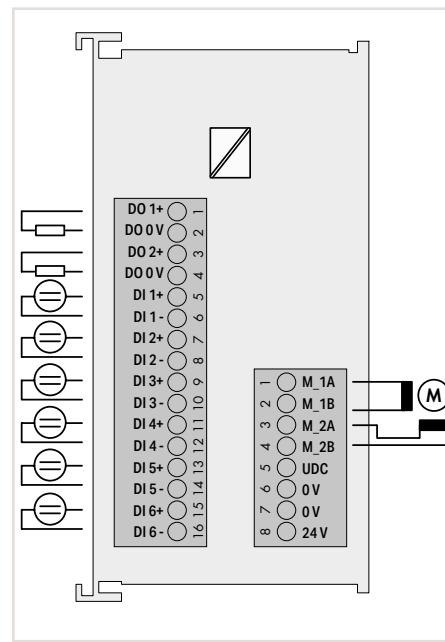

5.6

Item Description

Item No.

Order Text

Technical Data

Number of motor outputs	1 stepper motor (2 phases)
Supply voltage (motor)	55 VDC; Absolute upper limit: 71.5 V; Absolute lower limit: 18 V
Max. output current (motor)	2 x 5.0 A (2 x 7.5 A transient)
Stepper frequency	7812 Hz
Resolution	Path: 23 bits + sign bit; Speed: 15 bits + 16-bit prescaler; Acceleration: 15 bits + 16-bit prescaler
Number of digital outputs	2
Control voltage	24 VDC (-25 ... +30 %)
Max. output current (digital outputs)	0.5 A; short-circuit-protected
Output frequency	5 Hz
Number of digital inputs	2 x 24 VDC
Input filter	100 µs; software filter can be connected
Current consumption – system supply (5 V)	70 mA
Data width (internal)	12-byte input/output
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	48 x 69.8 x 100 mm
Approvals	CE, UL
Data sheet and further information, see:	wago.com/750-672

This stepper controller has an on-board power driver designed to control 2-phase stepper motors.

The 64-fold microstepping prevents step losses due to resonance in the acceleration phases and reduces wear on the mechanical parts. Adjustable current limits for stop, acceleration and constant speed help minimize motor power dissipation.

Six configurable inputs are directly processed by the internal software without delay. Two outputs can be linked with internal functions or freely allocated. Versatile functions enable a wide application range.

Inputs:

- Start/stop
- Limit switch (positive and negative direction)
- Reference cam
- Jog/tip (positive and negative direction)

Outputs (default setting):

- Target reached
- Error

Operating modes:

- Single positioning with different acceleration ramps
- Reference motion
- Jog
- Tip
- Command table
- Cam switch

Functions include:


- Absolute/relative positioning
- Setpoint change on the fly
- Rotary axis

Protection:

- Short circuit monitoring of motor connections: Winding short circuit and short circuit to 0 V and 24 V
- 24 V supply: Reverse voltage protection
- Motor supply: Reverse voltage protection via external fuse

Servo Stepper Controller

5.6

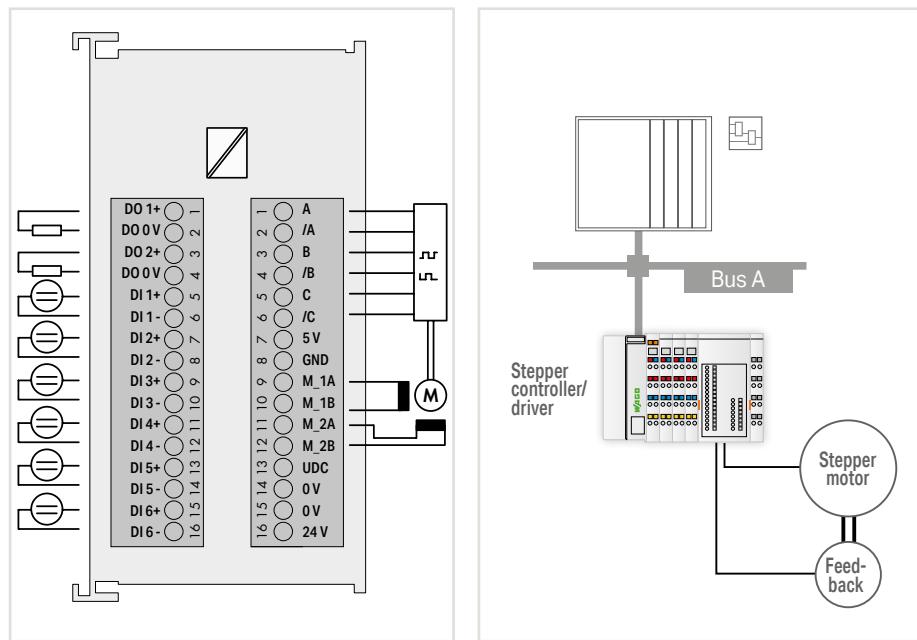

Item Description	Servo Stepper Controller; 55 VDC; 7.5 A	
Item No.	750-673	
Order Text	Servo Stepper Controller; 55 VDC; 7.5A	
Technical Data		
Number of motor outputs	1 stepper motor (2 phases)	
Supply voltage (motor)	55 VDC; Absolute upper limit: 71.5 V; Absolute lower limit: 18 V	
Max. output current (motor)	2 x 5.0 A (2 x 7.5 A transient)	
Stepper frequency	7812 Hz	
Resolution	Path: 23 bits + sign bit; Speed: 15 bits + 16-bit prescaler; Acceleration: 15 bits + 16 bit- prescaler	
Number of digital outputs	2	
Control voltage	24 VDC (-25 ... +30 %)	
Max. output current (digital outputs)	0.5 A; short-circuit-protected	
Output frequency	5 Hz	
Number of digital inputs	2 x 24 VDC	
Input filter	100 µs; software filter can be connected	
Signal voltage (encoder)	RS-485/422 compatible	
Encoder frequency	1 MHz	
Sensor supply	5 VDC; 300 mA; short-circuit-protected	
Quadrature decoder	4x evaluation	
Counter Modules	32 bits; binary	
Current consumption – system supply (5 V)	70 mA	
Data width (internal)	12-byte input/output	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	48 x 69.8 x 100 mm	
Approvals	CE, UL	
Data sheet and further information, see:	wago.com/750-673	

„ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

„ Approvals and corresponding ratings, see page 522 or www.wago.com

This servo stepper controller has an on-board power driver and an incremental encoder evaluation for controlling 2-phase stepper motors.

The 64-fold microstepping prevents step losses due to resonance in the acceleration phases and reduces wear on the mechanical parts. Together with the incremental encoder, the integrated vector control contributes to efficient, dynamic rotation speed characteristics.

Six configurable inputs are directly processed by the internal software without delay. Two outputs can be linked with internal functions or freely allocated. Versatile functions enable a wide application range.

Inputs:

- Start/stop
- Limit switch (positive and negative direction)
- Reference cam
- Jog/tip (positive and negative direction)

Outputs (default setting):

- Target reached
- Error

Operating modes:

- Single positioning with different acceleration ramps
- Reference motion
- Jog
- Tip
- Command table
- Cam switch

Functions include:

- Absolute/relative positioning
- Setpoint change on the fly
- Rotary axis


Protection:

- Short circuit monitoring of motor connections: Winding short circuit and short circuit to 0 V and 24 V
- 24 V supply: Reverse voltage protection
- Motor supply: Reverse voltage protection via external fuse

DC Drive Controller



Figure: 750-636

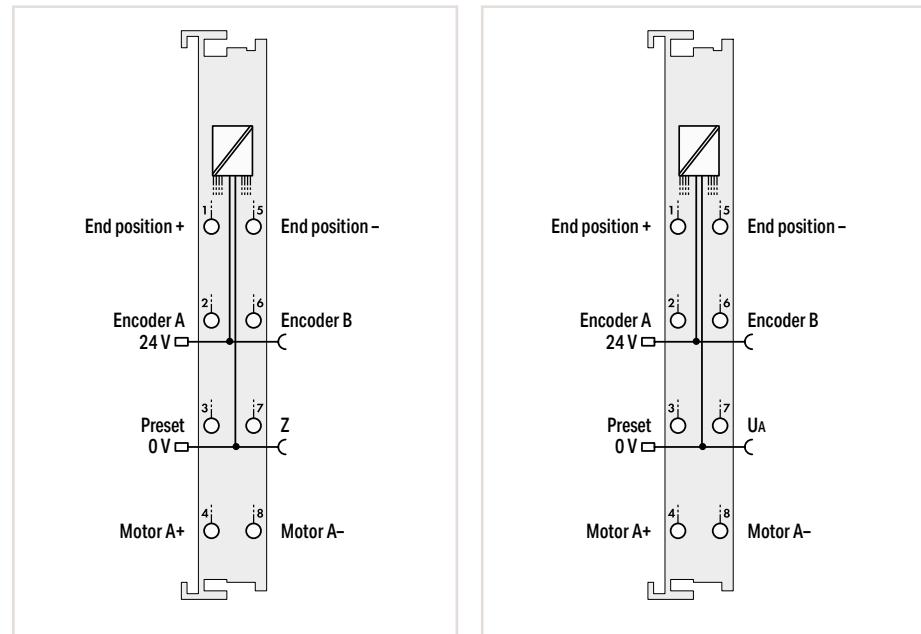

5.6

Item Description	DC Drive Controller; 24 VDC; 5 A		DC Drive Controller; 24 VDC; 5 A	
Version	Standard	Extended temperature	Separate motor power supply	Interference-free
Item No.	750-636	750-636/025-000	750-636/000-700	750-636/000-800
Order Text	DC-Drive Controller; 24 VDC; 5 A	DC-Drive Controller; 24 VDC; 5 A; T	DC-Drive Controller; 24 VDC; 5 A; UA	DC-Drive Controller; 24 VDC; 5 A; IF
Technical Data				
Interference-free				•
Number of outputs	1 (A+; A-; H-bridge output)		1 (A+; A-; H-bridge output)	
Motor voltage	24 VDC (-20 ... +15 %)		24 VDC (-20 ... +15 %)	
Separate motor voltage		24 VDC (-20 ... +30 %)	24 VDC (-20 ... +30 %)	
Output current (max.)	5 A (15 A/500 ms); short-circuit-protected		5 A (15 A/500 ms); short-circuit-protected	
PWM frequency (typ.)	20 kHz		20 kHz	
Number of digital inputs	3; Type 1; high-side switching		3; Type 1; high-side switching	
Signal voltage (0)	-3 ... +1.5 VDC		-3 ... +1.5 VDC	
Signal voltage (1)	2.4 ... 30 VDC		2.4 ... 30 VDC	
Encoder connection	A; B; Zero low-side switching		A; B; Zero low-side switching	
Signal voltage	5 ... 24 VDC; Open collector		5 ... 24 VDC; Open collector	
Limit frequency	50 kHz		50 kHz	
Quadrature decoder	1x, 2x, 4x evaluation		1x, 2x, 4x evaluation	
Supply voltage (field)	5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)		5 ... 14 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	55 mA		55 mA	
Data width (internal)	32-bit set/actual value; 16-bit control or status		32-bit set/actual value; 16-bit control or status	
Isolation	500 V (system/field)		500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C	
Dimensions W x H x D	12 x 67.8 x 100 mm		12 x 67.8 x 100 mm	
Approvals	CE; UL		CE; UL	
Data sheet and further information, see:	wago.com/750-636		wago.com/750-636	

This DC drive controller is a single-channel, intelligent positioning controller for 24 VDC motors up to 5 A with incremental position feedback.

Three 24 V inputs record the limit switches and a preset signal.



An incremental encoder interface evaluates signals from the position sensor and determines actual value.

Current reduction is possible via pulse width modulation (PWM).

As an option, the motor voltage can be supplied separately.

Proportional Valve Module

5.6

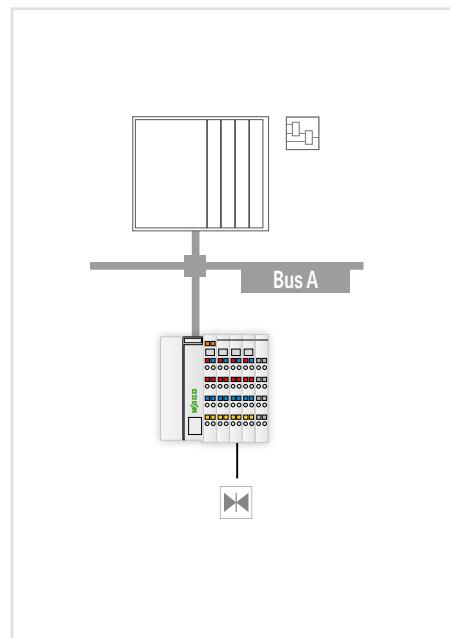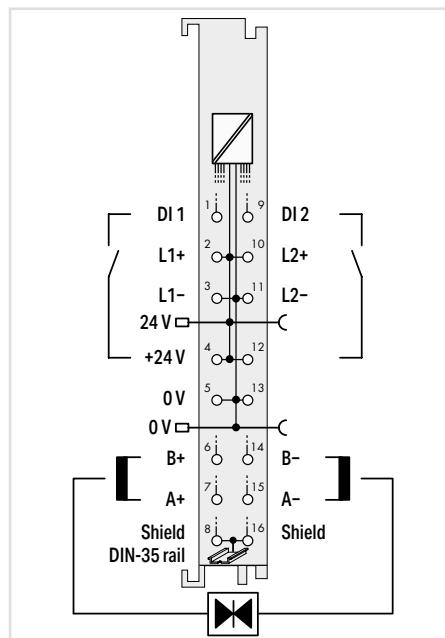

Item Description	Proportional valve controller
Version	Standard with 16 connectors
Item No.	750-632
Order Text	
Technical Data	
Number of outputs	2 bipolar outputs (A+; A- and B+; B-)
Output current (max.)	1-channel operation: 2 A; 2-channel operation: 1.6 A per channel
Output type	H-bridge output with current-regulated PWM output (short-circuit-proof and thermal overload-proof for each channel)
Dither frequency	250 Hz; 125 Hz; 62.5 ... 1 Hz (parameterizable)
PWM frequency (typ.)	50 kHz
Nominal output voltage	24 VDC (-25 ... +30 %)
Load type	Operating range: inductive (1 mH ... 600 mH); Internal load resistance (> 8 Ohm) 2; Type 1; high-side switching
Number of digital inputs	24 VDC (-25 % ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Supply voltage (field)	125 mA
Current consumption – system supply (5 V)	6 bytes (single-channel operating mode), 12 bytes (dual-channel operating mode)
Data width (internal)	500 V (system/field)
Isolation	0 ... +55 °C
Surrounding air temperature (operation)	12 x 69 x 100 mm
Dimensions W x H x D	CE; IEC 60945; Marine; OrdLoc/HazLoc; ATEX/IECEx
Approvals	wago.com/750-632
Data sheet and further information, see:	

This proportional valve module controls two single-coil valves or one valve. The module features two current-controlled PWM outputs with adjustable dither. Both unipolar and bipolar valve control are possible. Additionally, operation of a valve with two unipolar coils is also provided. The module is single-channel in this operating model! Characteristic curve adaptations, such as zero offset, dual gain compensation or range limitations, can be adjusted via parameters. The module functions can be internally triggered via digital outputs without any detours.

“ Mini-WSB marker card and mounting accessories,
see Section “Accessories and Tools”

“ Approvals and corresponding ratings,
see page 522 or www.wago.com

Communication Modules




Housing design (750 Series)

Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 67.8 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 60.6 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

Housing design (753 Series)

Dimensions W x H x D	Housing with 4 LEDs: 12 x 69.8 x 100 mm Housing with 8 LEDs: 12 x 69 x 100 mm
Height from upper-edge of DIN-rail	Housing with 4 LEDs: 62.6 mm Housing with 8 LEDs: 61.8 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG

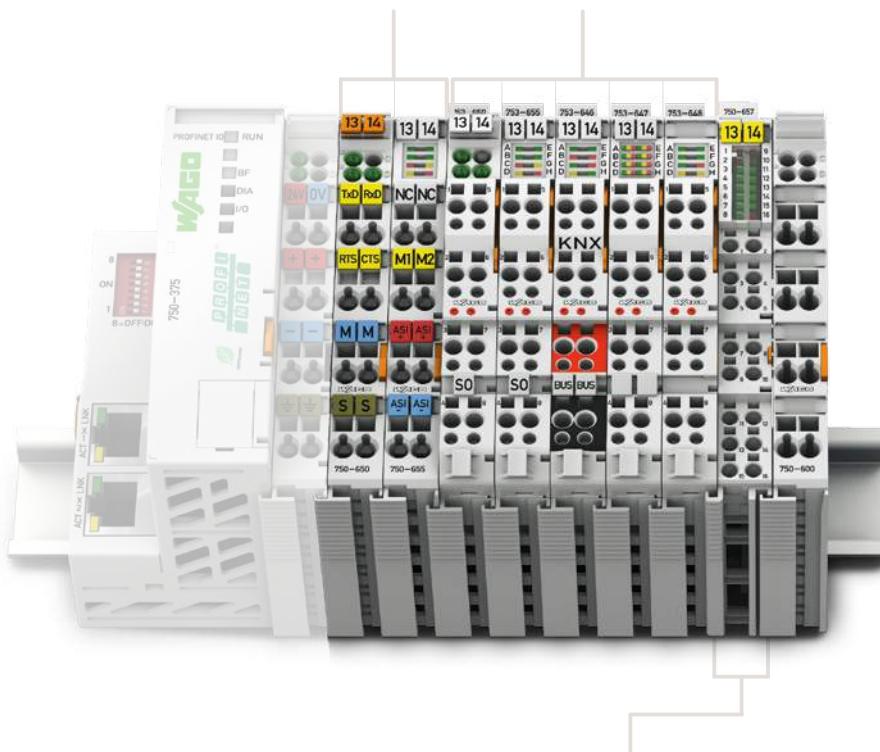

Housing design (750 Series), with Push-in CAGE CLAMP® connections (up to 16 connection points)

Dimensions W x H x D	12 x 69 x 100 mm
Height from upper-edge of DIN-rail	61.8 mm
Connection technology	Push-in CAGE CLAMP®
Conductor cross section	Solid: 0.08 ... 1.5 mm² / 28 ... 16 AWG Fine-stranded: 0.25 ... 1.5 mm² / 22 ... 16 AWG
Strip length	8 ... 9 mm / 0.33 inch



I/O System –
750 XTR Series

I/O-System – 750 and 753 Series, Communication Modules

Contents

Function	Description	Item Number			Page
		Standard	Extended Temperature	Pluggable	
Serial Interfaces	Serial Interface RS-232 C; 9600 baud	750-650		753-650	278
	Serial Interface RS-232 C; 9600 baud; 5 bytes	750-650/000-001			278
	Serial Interface RS-232 C; 9600 baud; Even; 7/2 bits	750-650/000-002			278
	Serial Interface RS-232 C; 9600 baud; Even; 8/1 bits	750-650/000-006			278
	Serial Interface RS-232 C; 19200 baud; None; 8/1 bits	750-650/000-010			279
	Serial Interface RS-232 C; 19200 baud; Even; 8/1 bits	750-650/000-011			279
	Serial Interface RS-232 C; 2400 baud; None; 8/1 bits	750-650/000-012			279
	Serial Interface RS-232 C; 4800 baud; Even; 8/1 bits; 5 bytes	750-650/000-015			279
	Serial Interface RS-232 C; Adjustable	750-650/003-000		753-650/003-000	279
	Serial Interface RS-485	750-653	750-653/025-018	753-653	280
	Serial Interface RS-485; 9600 baud; Even; 7/2 bits	750-653/000-001			280
	Serial Interface RS-485; 9600 baud; Even; 8/1 bits	750-653/000-002			280
	Serial Interface RS-485; 19200 baud; None; 8/1 bits; 5 bytes	750-653/000-006			281
	Serial Interface RS-485; 2400 baud; None; 8/1 bits	750-653/000-007			281
	Serial Interface RS-485; Adjustable	750-653/003-000	750-653/025-000	753-653/003-000	281
	Serial Interface RS-232/485	750-652*	750-652/025-000	753-652	282
	Serial TTY Interface; 9600 baud; None; 8/1 bits	750-651			283
Serial TTY Interface; 9600 baud; Even; 8/1 bits	750-651/000-002			283	
EnOcean	Radio Receiver EnOcean	750-642			284
KNX	KNX/EIB/TP1 Interface			753-646	285
DALI	DALI Multi-Master			753-647	286
LON®	LON® FTT Interface			753-648	287
MP-Bus	MP-Bus Master	750-643			288
M-Bus	M-Bus Master			753-649	289
SMI	SMI Master Module; for drives with 230 VAC			753-1630	290
	SMI Master Module; Low voltage			753-1631	290
AS-Interface Master	AS-Interface Master	750-655		753-655	291
IO-Link Master	IO-Link Master	750-657			292
CAN Gateway	CAN Gateway	750-658*			293
Data Exchange	Serial Data Exchange Interface	750-654			294
*This module is also available as a 750 XTR Series variant.		See Section 6			


Serial Interface RS-232 C



Figure: 750-650



Figure: 753-650

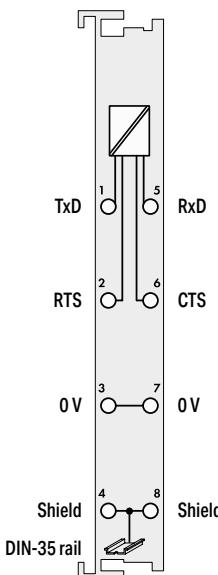


5.7

Item Description		Serial Interface RS-232 C									
Version		9600 baud	9600 baud; Pluggable (delivery without connector)	9600 baud; 5 bytes	9600 baud; Even; 7/2 bits	9600 baud; Even; 8/1 bits					
Item No.		750-650	753-650	750-650/000-001	750-650/000-002	750-650/000-006					
Order Text		RS232 C Interface; 9600Bd	RS232 C Interface; 9600Bd	RS232 C Interface; 9600Bd; 5byte	RS232 C Interface; 9600Bd; E; 7/2	RS232 C Interface; 9600Bd; E; 8/1					
Technical Data											
Pluggable connector			•								
Signal type			RS-232								
Transmission channels			1 TxD / 1 RxD; full-duplex								
Baud rate			9600 Bd								
Parity			None	Even							
Number of data bits			8	7	8						
Number of stop bits			1	2	1						
Buffer			120-byte input / 16-byte output								
Supply voltage (system)			5 VDC; via data contacts								
Current consumption – system supply (5 V)			55 mA								
Data width (internal)		1 x 24-bit input/output (3-byte user data); 1 x 8-bit control/status	1 x 24-bit input/ output (5-byte user data); 1 x 8-bit control/ status	1 x 24-bit input/output (3-byte user data); 1 x 8-bit control/status							
Isolation		500 V (system/field)									
Surrounding air temperature (operation)		0 ... +55 °C									
Dimensions W x H x D		12 x 69.8 x 100 mm									
Approvals		CE; IC; Marine; OrdLoc/HazLoc; ATEX/IECEx									
Data sheet and further information, see:		wago.com/750-650	wago.com/753-650	wago.com/750-650							
Accessories		Item No.									
Pluggable connector		753-110									
Coding keys		753-150									

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 522 or www.wago.com

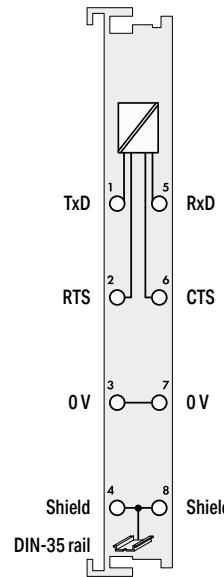**Serial Interface RS-232 C**

4800 baud; Even; 8/1 bits; 5 bytes	2400 baud; None; 8/1 bits	19,200 baud; None; 8/1 bits	19,200 baud; Even; 8/1 bits	Adjustable	Adjustable; Pluggable (delivery without connector);
750-650/000-015	750-650/000-012	750-650/000-010	750-650/000-011	750-650/003-000	753-650/003-000
RS232 C Interface; 4800Bd; E; 8/1	RS232 C Interface; 2400Bd; N; 8/1	RS232 C Interface; 19200Bd; N; 8/1	RS232 C Interface; 19200Bd; E; 8/1	RS232 C Interface; adjust	RS232 C Interface; adjust

RS-232

1 TxD / 1 RxD; full-duplex

4800 Bd	2400 Bd	19,200 Bd	1200 ... 57,600 Bd
Even	None	Even	None/even; adjustable
8			7/8; adjustable
1			1/2; adjustable

120-byte input / 16-byte output

5 VDC; via data contacts

55 mA

1 x 24-bit input/output (5-byte user data); 1 x 8-bit control/status	1 x 24-bit input/output (3-byte user data); 1 x 8-bit control/status	1 x 24-bit input/output (3-byte user data); 1 x 40-bit input/output (5-byte user data); 1 x 8-bit control/status
--	---	--

500 V (system/field)

0 ... +55 °C

12 x 69.8 x 100 mm

CE; IP65; Marine; OrdLoc/HazLoc; ATEX/IECEx

wago.com/750-650[wago.com/
750-650/003-000](http://wago.com/750-650/003-000)[wago.com/
753-650/003-000](http://wago.com/753-650/003-000)**Item No.**

753-110

753-150


Serial Interface RS-485



Figure: 750-653



Figure: 753-653

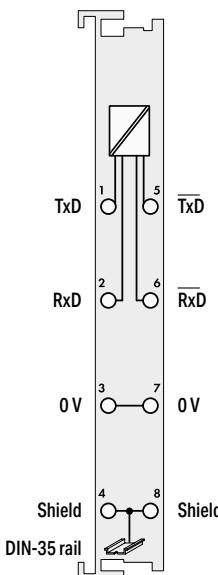


5.7

Item Description		Serial Interface RS-485				
Version		Standard	Pluggable (delivery without connector)	9600 baud; Even; 7/2 bits	9600 baud; Even; 8/1 bits	9600 baud; None; 8/1 bits; Extended temperature
Item No.		750-653	753-653	750-653/000-001	750-653/000-002	750-653/025-018
Order Text		RS485 Interface	RS485 Interface	RS485 Interface; 9600Bd; E; 7/2	RS485 Interface; 9600Bd; E; 8/1	RS485 Interface; 9600Bd; N; 8/1
Technical Data						
Pluggable connector			•	RS-422/-485		
Signal type				1 TxD / 1 RxD; full-duplex		
Transmission channels				9600 Bd		
Baud rate				120-byte input / 16-byte output		
Parity		None		Even		None
Number of data bits		8		7		8
Number of stop bits		1		2		1
Buffer		5 VDC; via data contacts				
Supply voltage (system)		65 mA				
Current consumption – system supply (5 V)		1 x 24-bit input/output (3-byte user data); 1 x 8-bit control/status				
Data width (internal)		1 x 40-bit input/output (5-byte user data); 1 x 8-bit control/status				
Isolation		500 V (system/field)				
Surrounding air temperature (operation)		0 ... +55 °C				
Dimensions W x H x D		12 x 69.8 x 100 mm				
Approvals		CE; UL; Marine; OrdLoc/HazLoc; ATEX/IECEx				
Data sheet and further information, see:		wago.com/750-653	wago.com/753-653		wago.com/750-653	
Accessories		Item No.				
Pluggable connector		753-110				
Coding keys		753-150				

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 522 or www.wago.com

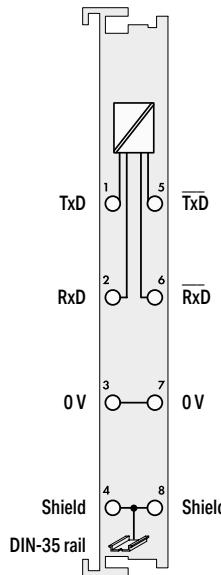**Serial Interface RS-485**

19,200 baud; None; 8/1 bits	2400 baud; None; 8/1 bits	Adjustable	Adjustable; Extended temperature	Adjustable; Pluggable (delivery without connector)
750-653/000-006	750-653/000-007	750-653/003-000	750-653/025-000	753-653/003-000
RS485 Interface; 19200Bd; N; 8/1	RS485 Interface; 2400Bd; N; 8/1	RS485 Interface; adjust	RS485 Interface; adjust; T	RS485 Interface; adjust

RS-422/-485

1 TxD / 1 RxD; full-duplex

19,200 Bd	2400 Bd	1200 ... 19,200 Bd
None		None/even; adjustable
8		7/8; adjustable
1		1/2; adjustable
120-byte input / 16-byte output		
5 VDC; via data contacts		
65 mA		
1 x 40-bit input/ output (5-byte user data); 1 x 8-bit control/ status	1 x 24-bit input/ output (3-byte user data); 1 x 8-bit control/ status	1 x 40-bit input/output (3/5-byte user data); 1 x 8-bit control/status

500 V (system/field)

0 ... +55 °C -20 ... +60 °C 0 ... +55 °C

12 x 69.8 x 100 mm

CE; ■ Marine; ■ OrdLoc/HazLoc; ■ ATEX/IECEx

wago.com/750-653[wago.com/
753-653](http://wago.com/753-653)**Item No.**

753-110

753-150


Serial Interface RS-232/485



Figure: 750-652



Figure: 753-652

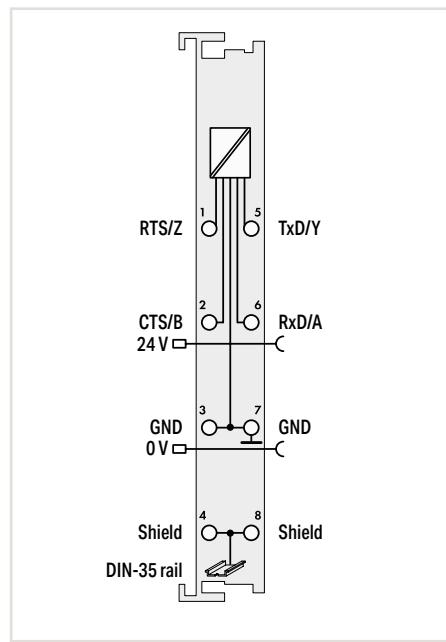

5.7

Item Description	Serial Interface RS-232/485		
Version	Standard	Extended temperature	Pluggable (delivery without connector)
Item No.	750-652	750-652/025-000	753-652
Order Text	RS232/485 Interface	RS232/485 Interface; T	RS232/485 Interface

Technical Data

Pluggable connector	•
Signal type	RS-232 / RS-422 / RS-485
Transmission channels	1 TxD / 1 RxD; full-duplex; half-duplex
Baud rate	9600 Bd (default setting); 300 ... 11,5200 Bd
Parity	None/Odd/Even
Number of data bits	7/8; adjustable
Number of stop bits	1/2; adjustable
Buffer	2560 bytes for reception / 512 bytes for transmission
Supply voltage (field)	24 VDC; via power jumper contacts (power supply via blade contact; transmission via spring contact)
Supply voltage (system)	5 VDC; via data contacts
Current consumption – system supply (5 V)	85 mA
Data width (internal)	8, 24 or 48 bytes (parameterizable)
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm 12 x 69 x 100 mm
Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx K
Data sheet and further information, see:	wago.com/750-652 wago.com/753-652

Accessories	Item No.
Pluggable connector	753-110
Coding keys	753-150


“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 522 or www.wago.com

Serial TTY Interface



Figure: 750-651

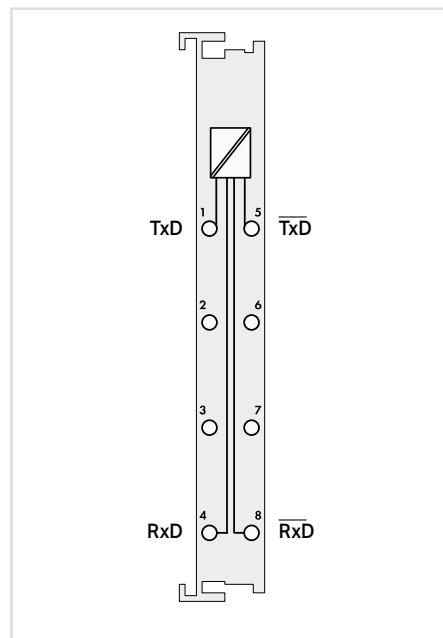


5.7

Item Description	Serial TTY Interface	
Version	9600 baud; None; 8/1 bits	9600 baud; Even; 8/1 bits
Item No.	750-651	750-651/000-002
Order Text	TTY Interface; 9600Bd; N; 8/1	
Technical Data		
Signal type	TTY; 20 mA	
Transmission channels	1 TxD / 1 RxD; full-duplex	
Baud rate	9600 Bd	
Load impedance	< 500 Ω	
Parity	None	Even
Number of data bits	8	
Number of stop bits	1	
Buffer	128-byte input / 16-byte output	
Supply voltage (system)	5 VDC; via data contacts	
Current consumption – system supply (5 V)	55 mA	
Data width (internal)	1 x 24-bit input/output (3-byte user data); 1 x 8-bit control/status	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE; UL; Marine; CSA; OrdLoc/HazLoc	
Data sheet and further information, see:	wago.com/750-651	

Radio Receiver EnOcean



5.7

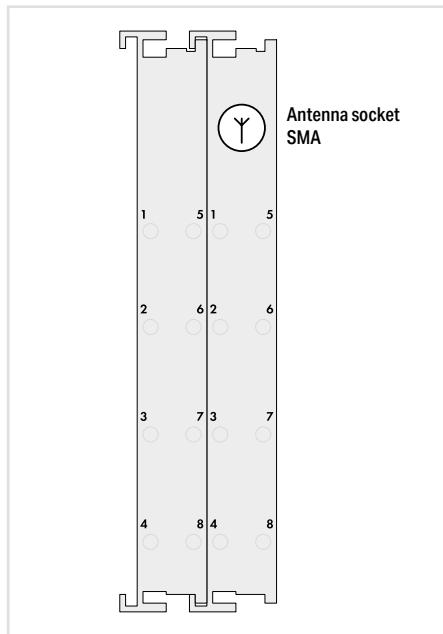

Item Description	Radio Receiver EnOcean
Version	Standard
Item No.	750-642
Order Text	Radio Receiver EnOcean
Technical Data	
Antenna	External via SMA socket
Frequency band	868.3 MHz
Transmission range	Up to 300 m in open field (30 m typical in buildings, see manual)*
Transmission protocol (radio telegram)	EnOcean
Supply voltage (system)	5 VDC; via data contacts
Current consumption – system supply (5 V)	80 mA
Data width (internal)	1 x 24-bit input/output (3-byte user data); 1 x 8-bit control/status
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 72 x 100 mm
Approvals	CE; IC; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-642
Accessories	
External antenna	

This radio receiver obtains radio telegrams from maintenance-free, self-powered and wireless switches/sensors based on EnOcean radio technology.

The energy required for switch or sensor operation is produced by converting one type of energy (heat, solar or mechanical energy) into usable electrical energy.

The LED (RSSI) indicates a sufficient input level.


Preprogrammed function blocks for WAGO Controllers make integration easy.

*The maximum range in the field decreases with use in buildings and changes depending on the building materials used and the spatial geometry. Therefore, range specifications within buildings can only represent typical values which can normally be achieved. More detailed information is available in the manual.

„ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

„ Approvals and corresponding ratings, see page 522 or www.wago.com

KNX/EIB/TP1 Interface

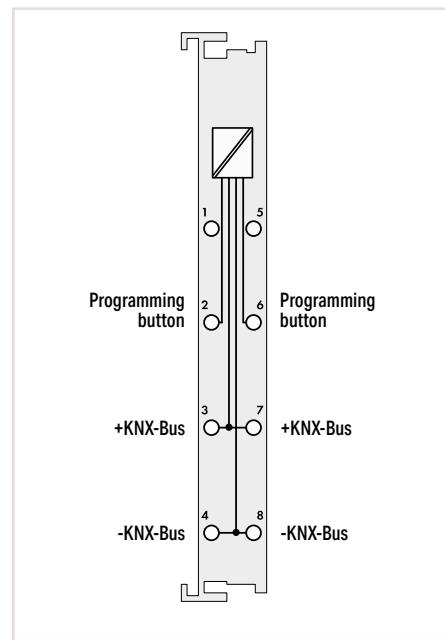

Item Description	KNX/EIB/TP1 Interface
Version	Pluggable
Item No.	753-646
Order Text	KNX/EIB/TP1 Interface
Technical Data	
Pluggable connector	●
Specification	KNX/TP1 bus: 1.0
Number of communication objects	253
Number of group addresses	254
Number of associations	254
Baud rate	9.6 kBd
Additional connections	Programming button
Applicability	On controllers
Current consumption – system supply (5 V)	25 mA
Data width (internal)	24 bytes
Isolation	2500 V rms
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69 x 100 mm
Approvals	CE; ■■■■■ Marine; ■■■■■ OrdLoc
Data sheet and further information, see:	wago.com/753-646
Accessories	
Pluggable connector	Included
Coding keys	Included

The KNX/EIB/TP1 Module connects to a KNX/EIB/TP1 network. This module supports two different functions:

1. Device mode:

With this module, all programmable fieldbus controllers relevant for building automation can be connected to a KNX/TP1 network. The module is a standard KNX device and is linked via ETS3/4 Professional Commissioning Tool.


An ETS3/4 plug-in is required so that data from the application program can be allocated to group addresses for the programming software.

2. Router mode:

When connected to a KNX/IP Controller (e.g., 750-889), the combination becomes a KNXnet/IP router. The module is switched to the router mode automatically. An application program is not required for operation in router mode. Additional modules that are connected to a KNX IP Controller are addressed in device mode by the application.

The bus connections are internally bridged inside the plug, so the bus is not interrupted when the plug is pulled from the module. The plug is included with delivery.

DALI Multi-Master

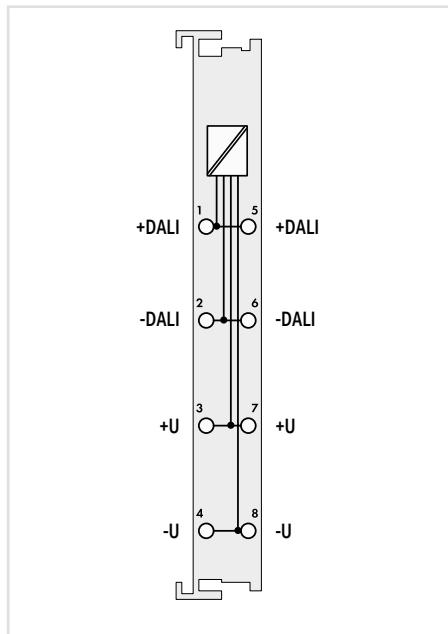

Item Description	DALI Multi-Master
Version	Pluggable
Item No.	753-647
Order Text	DALI Multi-Master
Technical Data	
Pluggable connector	●
Number of participants	64 control gears (EVG) + 16 multi-sensors (max. 64 addresses for control devices (sensors))
Baud rate	1200 bit/s
Bus length (max.)	300 m
Bus topology	Star/line/combination
Supply voltage (DALI)	18 V (external)
Number of groups	16 (+ 16 virtual groups)
Number of scenes	16
Applicability	On programmable fieldbus controllers
Current consumption – system supply (5 V)	85 mA
Data width (internal)	24 bytes
Isolation	1500 V DALI bus/local bus
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69 x 100 mm
Approvals	CE; KC; Marine; UL OrdLoc
Data sheet and further information, see:	wago.com/753-647
Accessories	
DALI Multi-Master DC/DC Converter (for supplying a single module)	Item No.
Switched-Mode Power Supply; for DALI Multi-Master (753-647); 1-phase; Output volt- age: 18 VDC; Output current: 1.1 A	753-620
Pluggable connector	787-1007
Coding keys	Included
	Page
	330
	493
	Included
	Included

This manufacturer-independent DALI standard ensures interoperability of DALI devices in lighting applications. This standard is substitute for the 1-10 V dimmer interface.

In addition to 64 DALI actuators (ECGs), a DALI Multi-Master Module supports up to 16 multi-sensors (max. 64 sensor addresses). Each DALI ECG can be assigned to 16 groups and 16 scenes. The DALI Multi-Master Module also offers 16 additional virtual groups on the DALI bus.

DALI control devices can be seamlessly integrated with all other building systems. Several DALI masters can be connected to a single fieldbus node. The maximum number of modules that can be connected to a controller depends on the memory required by the application. Function blocks prepared for DALI are available for programming fieldbus nodes.


Alternatively, an "EASY Mode" allows lighting functions to be readily controlled without any PLC programming.

The DALI Configurator (Section "Software" / Page 39) simplifies commissioning of the DALI network. It provides the following functions: easy commissioning, configuration, service, support and maintenance of the DALI network.

“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 522 or www.wago.com

LON® FTT Interface

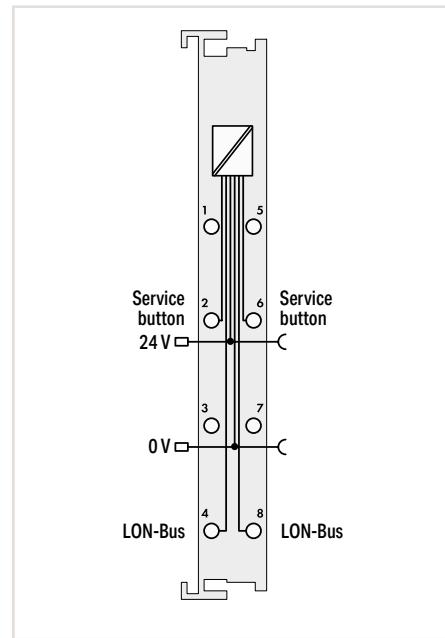


5.7

Item Description	LON® FTT Interface
Version	Pluggable
Item No.	753-648
Order Text	LON FTT Interface
Technical Data	
Pluggable connector	●
Number of network variables	249
Number of aliases	127
Baud rate	78 kbit/s
Bus length (max.)	500 m (free topology) / 2700 m (bus)
Transmission medium	Twisted Pair – FTT
Additional connections	Service button
Applicability	On controllers; max. 2 per controller
Supply voltage (field)	24 VDC; via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	30 mA
Data width (internal)	24 bytes
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; UL; CSA; OrdLoc/HazLoc
Data sheet and further information, see:	wago.com/753-648
Accessories	
Pluggable connector	Included
Coding keys	Included

The LON® FTT Interface is a full-fledged and flexible LON® device within LonWorks® FT or LP network. The module's network variable interface defines 249 network variables of any type and supports both LonMark® objects and configuration properties.

MP-Bus Master

5.7

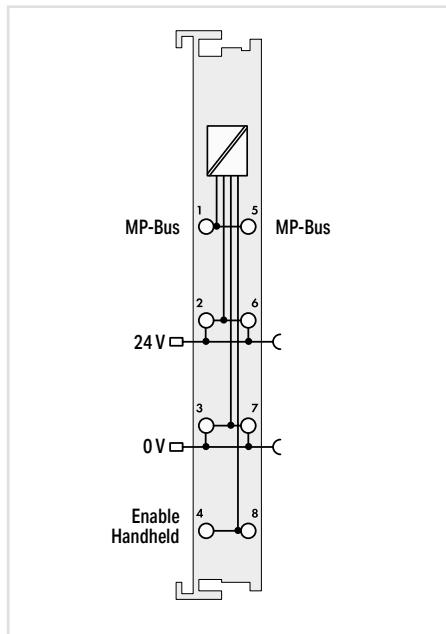

Item Description	MP-Bus Master
Version	Standard
Item No.	750-643
Order Text	MP-Bus Master
Technical Data	
Number of participants	Max. 8 slaves
Supply voltage (MP-Bus)	24 VDC; via power jumper contacts
Bus length (max.)	800 m
Applicability	On controllers
Supply voltage (field)	24 VDC; via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	15 mA
Data width (internal)	8 bytes
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-643


This module acts as a master for the MP bus (Multi-Point bus from Belimo/Switzerland) and allows the bus to be integrated into a higher level bus network. The MP-Bus controls HVAC actuators for dampers, regulator valves or VAV air volume controls.

The actuators have connections for active and passive sensors (temperature, humidity, ON/OFF switch), which may also be accessed via MP-Bus. An MP-Bus master can manage up to 8 slaves (actuators) + 8 sensors (1 sensor per slave) via a common bus line, which considerably reduces actuator and sensor wiring.

„ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

„ Approvals and corresponding ratings, see page 522 or www.wago.com

M-Bus Master

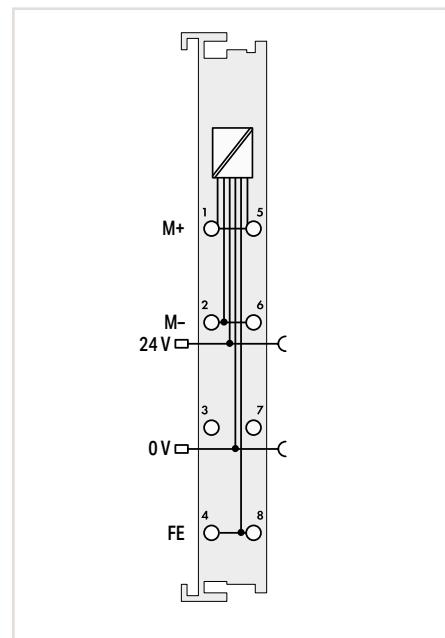



5.7

Item Description	M-Bus Master
Version	Pluggable
Item No.	753-649
Order Text	M-Bus Master
Technical Data	
Pluggable connector	●
Transmission channels	1; bidirectional
Baud rate	up to 1000 m at 9600 baud; up to 2000 m at 2400 baud; up to 6000 m at 300 baud
M-Bus loads (max.)	40 (1.5 mA each)
Topology	Star, tree and line topology
Supply voltage (field)	24 VDC (-2.5 ... +5 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	130 mA
Supply voltage (system)	5 VDC; via data contacts
Current consumption – system supply (5 V)	29 mA
Isolation	500 V (system/field)
Cable type	2-line; shielded or unshielded
Data width	24 bytes (mailbox 2.0 with 22-byte length)
Startup and configuration	WAGO-I/O-PRO V2.3; e!COCKPIT
Approvals	CE; UL
Data sheet and further information, see:	wago.com/753-649
Accessories	
Pluggable connector	Item No.
Coding keys	Included
	Included

SMI Master Module



Figure: 753-1630

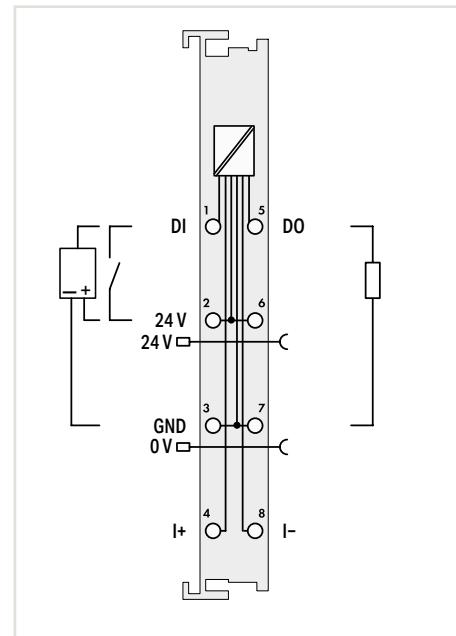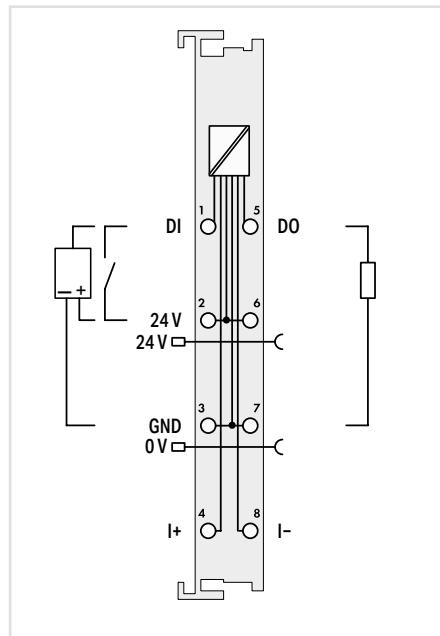

Item Description	SMI Master; 230 VAC	SMI Master LoVo; 24 VDC
Version	Pluggable	Pluggable
Item No.	753-1630	753-1631
Order Text	SMI Master; 230 VAC	SMI Master LoVo; 24 VDC
Technical Data		
Number of channels	1 x SMI (1 ... 16 SMI slaves per channel)	1 x SMI (1 ... 16 SMI slaves per channel)
Interface specification	SMI Master interface per SMI specification	SMI Master interface per SMI specification
Number of digital inputs	1	1
Input characteristic	Type 1	Type 1
Input voltage (max.)	31.2 VDC	31.2 VDC
Number of digital outputs	1	1
Output current per channel	0.5 ADC; short-circuit protected	0.5 ADC; short-circuit protected
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	11.8 mA	11.8 mA
Supply voltage (system)	5 VDC; via data contacts	5 VDC; via data contacts
Current consumption – system supply (5 V)	33 ... 42 mA	33 ... 42 mA
Isolation	3 kVAC RMS; 4 kV surge (system/SMI); 1.5 kVAC RMS; 2.5 kV surge (system/field)	3 kVAC RMS; 4 kV surge (system/SMI); 1.5 kVAC RMS; 2.5 kV surge (system/field)
Cable type	2-line; unshielded	2-line; unshielded
Cable length	350 m	350 m
Data width	12-byte data	12-byte data
Startup and configuration	Via WAGO SMI Configurator or IEC libraries	Via WAGO SMI Configurator or IEC libraries
Approvals	CE; K	CE; K
Data sheet and further information, see:	wago.com/753-1630	wago.com/753-1631
Accessories	Item No.	Item No.
Pluggable connector	Included	Included
Coding keys	Included	Included

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 522 or www.wago.com



AS-Interface Master



Figure: 750-655



Figure: 753-655

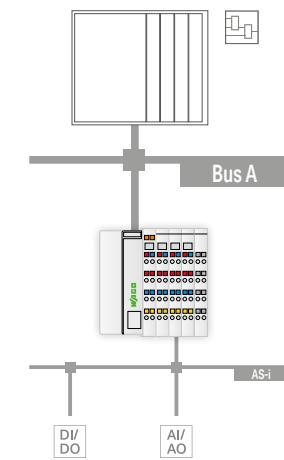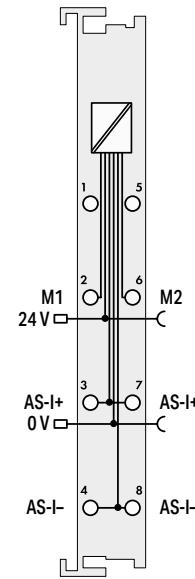

Item Description
Version
Item No.
Order Text

Technical Data
Pluggable connector
AS-i master class
Number of slaves
Slave profiles
Cable length
AS-i cycle time
Supply voltage (AS-i)
Supply voltage (field)

Current consumption – system supply (5 V)
Data width (internal)
Isolation
Surrounding air temperature (operation)
Dimensions W x H x D

Approvals
Data sheet and further information, see:

Accessories
Pluggable connector
Coding keys

AS-Interface Master	
Standard	Pluggable (delivery without connector)
750-655	753-655
AS-Interface Master	AS-Interface Master

M4	•
62	
V3.0 with transaction types 1 ... 5	
100 m (with repeater 300 m)	
0.3 ... 10 ms	
26.5 ... 31.6 V	
24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
55 mA	
12 ... 48 bytes (max.); Configurable, including 1 byte control/status	
500 V (system/field)	
0 ... +55 °C	
12 x 67.8 x 100 mm	12 x 69 x 100 mm

CE; IP65; Marine; OrdLoc/HazLoc; ATEX/IECEx	wago.com/750-655	wago.com/753-655
---	------------------	------------------



The AS-Interface Master Module connects AS-Interface devices to a higher-level fieldbus. It acts as a master for the AS-Interface and via the fieldbus coupler, as a slave for the fieldbus. The AS-i functions are provided both cyclically and acyclically via the fieldbus.

Diagnostics, which go far beyond the AS-i specifications, simplify detection of both sporadic configuration errors and AS-i communication interference sources. An auto-installation mode allows an AS-Interface network to be created via sequential slave installation, with no addressing tool required.

Both signal transmission and operating status, as well as trouble-free local bus communication, are indicated via LEDs.

IO-Link Master


5.7

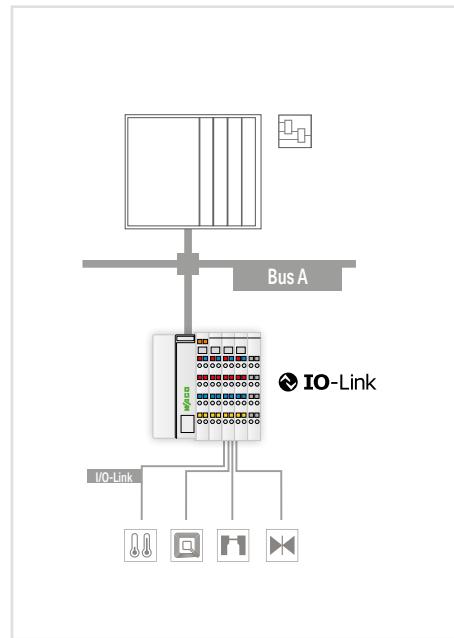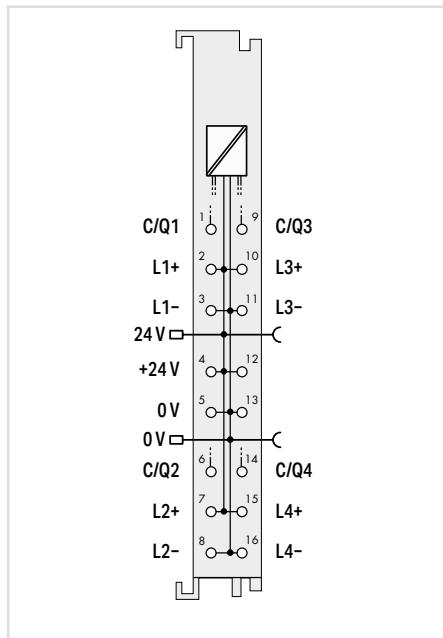

Item Description	IO-Link Master
Version	Standard with 16 connectors
Item No.	750-657
Order Text	IO-Link Master
Technical Data	
Number of I/O-Link ports	4
Baud rate	4.8 Kbit/s; 38.4 Kbit/s; 230.4 Kbit/s
Cable length	20 m
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption – system supply (5 V)	40 mA
Data width (internal)	4 ... 24 bytes
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69 x 100 mm
Approvals	CE; KC; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-657

Four different IO-Link devices or standard digital sensors/actuators can simultaneously connect to the IO-Link Master. Process data, as well as acyclic data for identification, configuration, parameterization and diagnostics can be communicated to the respective device via a 3-wire connection.


The functions and performance data are defined in device description files for master and devices; these are easy to customize via engineering tool. If a device must be replaced, the IO-Link devices' configuration and parameterization can be automatically restored without maintenance personnel. Project design, installation and operation are simplified!

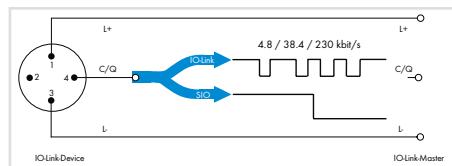

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 522 or www.wago.com

CAN Gateway

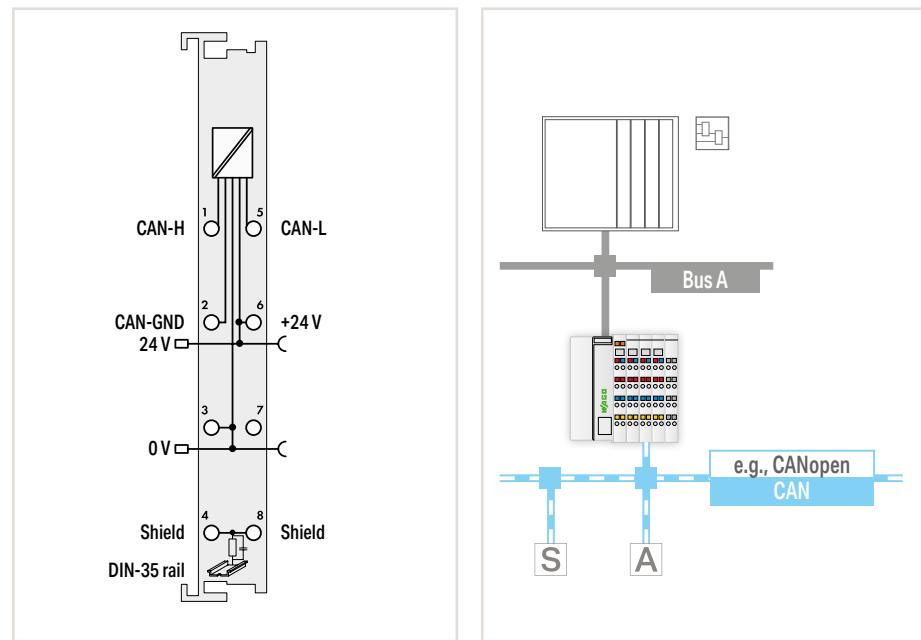

5.7

Item Description	CAN Gateway	
Version	Standard	
Item No.	750-658	
Order Text	CAN Gateway	
Technical Data		
Number of CAN interfaces	1	
Baud rate	10 kbit/s; 20 kbit/s; 50 kbit/s; 125 kbit/s; 250 kbit/s; 500 kbit/s; 800 kbit/s (automatic baud rate)	
Data formats	Per 2.0 A standard (11-bit ID); Per 2.0 B extended (29-bit ID)	
Supply voltage (field)	24 VDC; via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption – system supply (5 V)	50 mA	
Data transfer time	5 ms (at 32-bit I/O)	
Data width (internal)	4 ... 24 bytes	
Isolation	500 V (system/field)	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 67.8 x 100 mm	
Approvals	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-658	



The CAN Gateway allows a CAN bus to be installed as a sub-bus beneath a fieldbus coupler or controller. It enables special sensors/actuators that are only available with the widely used CAN bus to also be integrated under other bus systems. Function blocks allow the gateway to read and write higher-protocol telegrams (e.g., CANopen).

The module offers three different operating modes:

- Sniffer mode: Detailed analysis of the CAN bus through passive "snooping"
- Transparent mode: Active CAN subscriber that can send and receive any type of CAN telegram
- Mapped mode: Enables direct generation of CAN telegrams from the process image, or selective copying of process values from received CAN telegrams into the input process image (cyclic or event-based)

Serial Data Exchange Interface

5.7

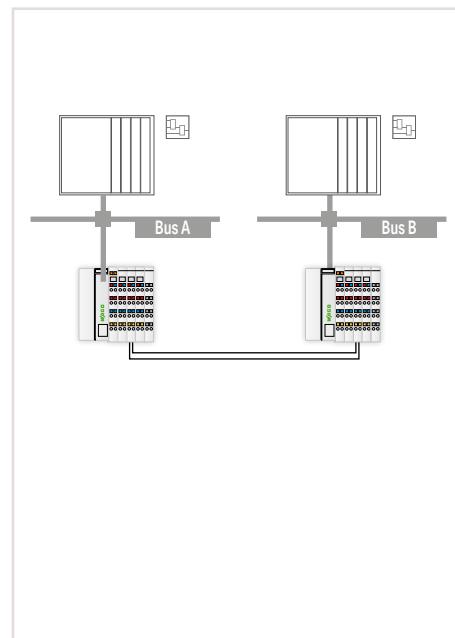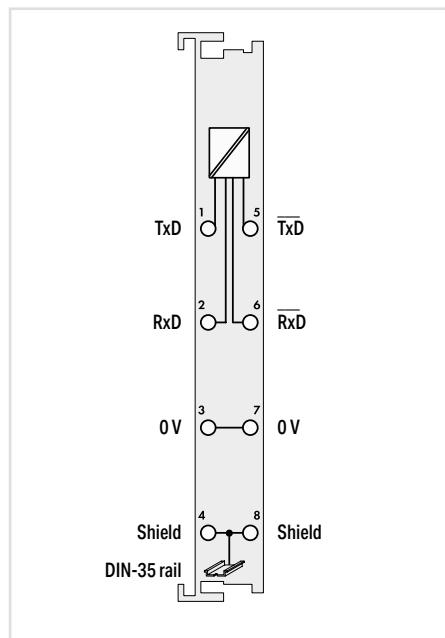

Item Description	Serial Data Exchange Interface
Version	Standard
Item No.	750-654
Order Text	Data Exchange Interface
Technical Data	
Transmission channels	1 TxD / 1 RxD; full-duplex
Baud rate	62500 Bd (8 N 1)
Bit transfer	Via 2 twisted pairs with differential signals
Line impedance	120 Ω
Line length (max.)	1000 m
Current consumption – system supply (5 V)	65 mA
Data width (internal)	1 x 32-bit input/output; 1 x 8-bit control/status
Isolation	500 V (system/field)
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; IP65; Marine; ATEX OrdLoc
Data sheet and further information, see:	wago.com/750-654

This data exchange interface allows the exchange of data between different fieldbus systems. Two modules form a communication pair that is installed in fieldbus nodes and connected by two twisted wire pairs. The data exchange is done in full duplex operation, independent of the fieldbus system used. The data at the output of the fieldbus coupler is transmitted to the communication partner. This module then transmits the data to the input process image of its fieldbus coupler and vice versa. The "function" LED indicates a data exchange with the coupler. The status of the data transmission is indicated by the TxD and RxD LEDs.

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 522 or www.wago.com

Functional Safety




Housing design (750/753 Series)

Dimensions W x H x D	750 Series: 12 or 24 x 67.8 x 100 mm 753 Series: 12 or 24 x 69 x 100 mm
Height from upper-edge of DIN-rail	750 Series: 60.6 mm; 753 Series: 61.8 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	750 Series: 8 ... 9 mm / 0.33 inch 753 Series: 9 ... 10 mm / 0.37 inch

Specialty housing

Dimensions W x H x D	48 x 69.8 x 100
Height from upper-edge of DIN-rail	62.6 mm
Connection technology	Push-in CAGE CLAMP®
Conductor cross section	0.05 ... 1.5 mm² / 20 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

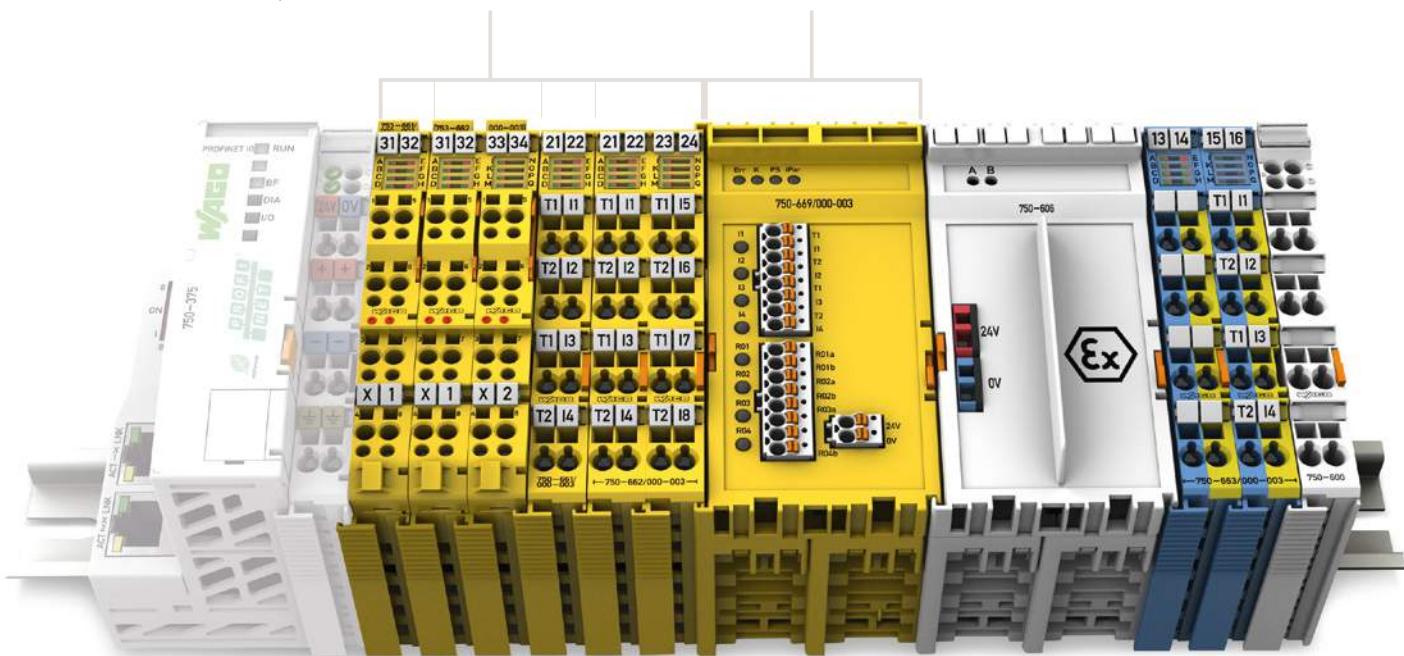


Functional Safety

In the European Union, the machinery directive defines the requirements for machine and system safety. This ensures a uniform standard for the protection of "life and limb" for people within a machine's operating area.

The required risk assessment is based on harmonized standards (e.g., EN 13849) and identifies existing risks and required risk reduction (SIL or PL quality). Based on the risk assessment, safety functionality can be implemented, e.g., by presence detection or protection zone violations using secure switches or light arrays to immediately shut down the "risk." For this purpose, the safety signals are detected by the "yellow" safety modules and transmitted via "PROFIsafe" to the fail-safe PLC for further processing. The result is then executed via safe actuator (e.g., output module or controller).

The unique characteristic safety values of the WAGO modules facilitate calculation of the final safety function up to Cat. 4/PLe according to EN 13849, or SIL3 according to EN 62061 or IEC 61511.

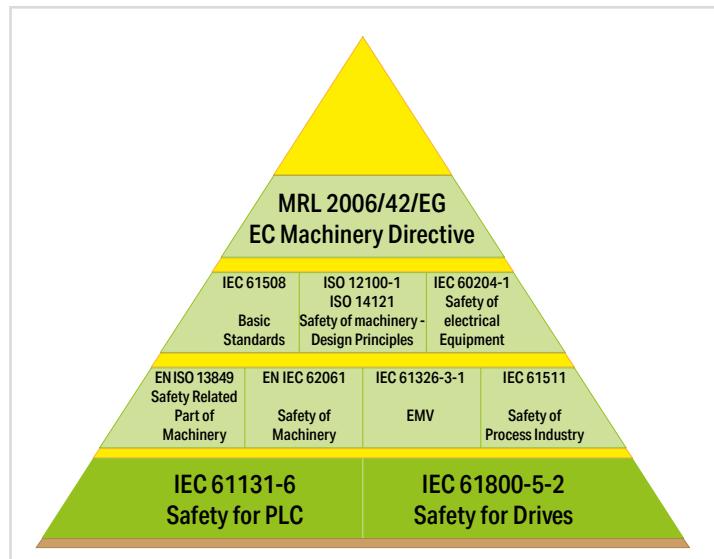

I/O System – 750 and 753 Series, Functional Safety

Contents

Function	Description	Item Number		Page
		Standard	Pluggable	
Fail-Safe Digital Inputs PROFIsafe	Fail-Safe Digital Input, 8 Channels; 24 VDC; PROFIsafe	750-660/000-001		302
	Fail-Safe Digital Input, 4 Channels; 24 VDC; PROFIsafe V 2.0 iPar	750-661/000-003	753-661/000-003	303
	Fail-Safe Digital Input, 8 Channels; 24 VDC; PROFIsafe V 2.0 iPar	750-662/000-003	753-662/000-003	303
Fail-Safe Digital Inputs/Outputs PROFIsafe	Fail-Safe Digital Input/Output, 4/4 Channels; 24 VDC; 0.5 A; PROFIsafe	750-665/000-001		302
	Fail-Safe Digital Input/Output, 4/2 Channels; 24 VDC; 10 A; PROFIsafe V 2.0 iPar	750-666/000-003	753-666/000-003	304
	Fail-Safe Digital Input/Output, 4/4 Channels; 24 VDC; 2 A; PROFIsafe V 2.0 iPar	750-667/000-003	753-667/000-003	304
	Fail-Safe Digital Input/Relay Output, 4/4 Channels; 48 VAC/60 VDC; 6 A; PROFIsafe V 2.0 iPar	750-669/000-003		306
Intrinsically Safe Digital Input for Functional Safety	Intrinsically Safe 4-Channel Digital Input; 24 VDC; PROFIsafe V 2.0 iPar	750-663/000-003		307
	Classification of binary 24 V interfaces with testing in the field of functional safety according to position paper CB24I of ZVEI (German Electrical and Electronic Manufacturer's Association)			298
Supply Modules Ex i 	The intrinsically safe I/O module with inputs for functional safety (750-663/000-003) must only be operated using an Ex i 24 VDC power supply (e.g., 750-606, 750-625/000-001)! General information (e.g., installation regulations) on explosion protection is available in the WAGO-I/O-SYSTEM 750 manuals!			
	Supply Module; 24 VDC; Diagnostics; Intrinsically safe	750-606		310
	Power Supply; 24 VDC; Intrinsically safe	750-625/000-001		310
Filter Modules 	The mixed operation of safe and conventional I/O modules streamlines system configuration. For increased electromagnetic immunity (EMC standard), WAGO offers compact power supply filter modules (see Section 4.10). Specific power supply features must be considered, which are described in the corresponding manuals.			
	Field Supply Filter (Surge); 24 VDC; Higher isolation	750-624/020-000		334
	Supply Filter; 24 VDC; Higher isolation	750-626/020-000		336

Position Paper CB24i of the German Electrical and Electronic Manufacturer's Association (ZVEI)

Fail-safe digital interfaces differ from conventional digital interfaces through higher safety testing for both inputs and outputs.

They include dynamic digital interfaces of different characteristics and functions. At first glance, the combination of inputs to outputs results in a variety of possible variants due to the different applications.

For this reason, ZVEI has issued the Position Paper CB24i in order to increase functional safety and simplify engineering processes.

The purpose of this paper is to:


- describe terms
- define characteristics of interface types
- specify product information (technical data) per interface type to be supplied by the manufacturer.

This paper provides a technical description for all interface types. No safety-related assessment is made.


The variety of possible combinations was divided into just four interface types:

5.8


For both interface types C and D, four "performance" classes are also available to match the time requirements of the test pulses.

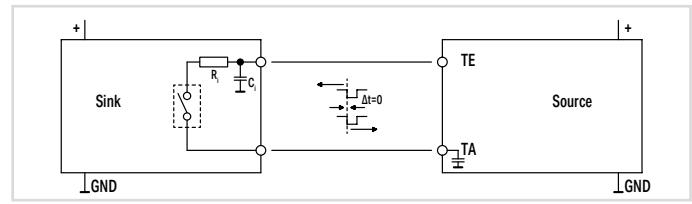


Interface type A

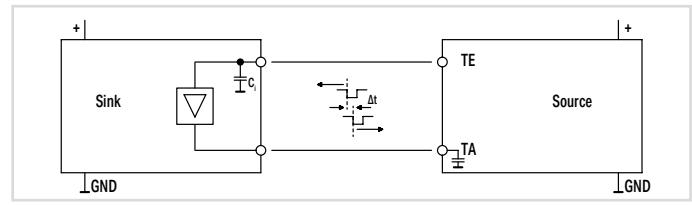

Interface type B

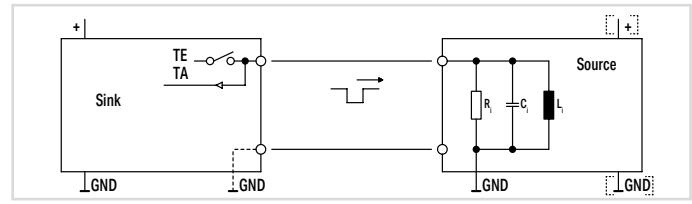

Interface type C

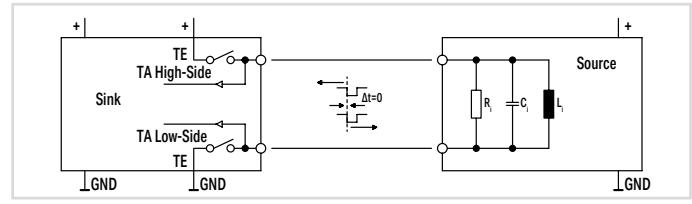

Interface type D

The identifying key has the following structure:

Source/Sink	Interface type (and class)	Additional measures "M"	Sink/Source	Suitable interface type (and class)	Suitable interface type (and class)	Suitable interface type (and class)
-------------	----------------------------	-------------------------	-------------	-------------------------------------	-------------------------------------	-------------------------------------

The first position describes the interface type and, if necessary, the class of the product. The second position indicates if additional measures are necessary. Next, the interface type suitable for this product is specified. Up to three interface types can be indicated.

A row can only contain interface types of the same kind. Depending on the product, several identifying keys may also be used.

Examples:

a) Manufacturer information for a source of interface type C/class 2 (e.g., sensor):

Source	C2		Sink	C1	C2	
--------	----	--	------	----	----	--

Explanation: In this case, a source of type C2 is compatible with a sink of type C1 and also with a sink of type C2.

b) Manufacturer information for a sink of interface type C/class 2 (e.g., safety PLC):

Sink	C2		Source	C2	C3	
------	----	--	--------	----	----	--

Explanation: In this case, a sink of type C2 is compatible with a source of type C2 and also with a sink of type C3.

c) Manufacturer information for a sink of interface type A (e.g., safety evaluation unit):

Sink	A	M	Source	A		
------	---	---	--------	---	--	--

Explanation: In this case, a sink of type A is compatible with a source of type A subject to "M" additional measures.

Complete information can be found in the ZVEI Position Paper CB24i.

This position paper is available for download in German and English via the ZVEI website.

Classification of Binary 24 V Interfaces with Testing in the Field of Functional Safety per ZVEI Position Paper CB24I

WAGO – Functional Safety		Identifying Key per ZVEI Position Paper CB24I										
Description	Item No.	Source/Sink	Interface type	Additional measures "M"	Measures			Sink/Source	Suitable interface type	Suitable interface type	Suitable interface type	
					Parameterize filter time, short circuit test	Parameterize/switch off test pulse duration	Protected wiring					
Inputs												
Fail-Safe Digital Input, 8 Channels; 24 VDC; PROFIsafe	750-660/000-001	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
Fail-Safe Digital Input, 4 Channels; 24 VDC; PROFIsafe V 2.0 iPar	750-661/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
Fail-Safe Digital Input, 4 Channels; 24 VDC; PROFIsafe V 2.0 iPar	753-661/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
Fail-Safe Digital Input, 8 Channels; 24 VDC; PROFIsafe V 2.0 iPar	750-662/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
Fail-Safe Digital Input, 8 Channels; 24 VDC; PROFIsafe V 2.0 iPar	753-662/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
Inputs/Outputs												
Fail-Safe Digital Input/Output, 4/4 Channels; 24 VDC; 0.5 A; PROFIsafe	750-665/000-001	Sink	A	M				Source	A	-	-	-
		Source	C0	M				Sink	C0	-	-	-
Fail-Safe Digital Input/Output, 4/2 Channels; 24 VDC; 10 A; PROFIsafe V 2.0 iPar	750-666/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
		Source	C0	M		x		Sink	C0	C1	C2	C3
		Source	D0	M		x		Sink	D0	D1	D2	D3
Fail-Safe Digital Input/Output, 4/2 Channels; 24 VDC; 10 A; PROFIsafe V 2.0 iPar	753-666/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
		Source	C0	M		x		Sink	C0	C1	C2	C3
		Source	D0	M		x		Sink	D0	D1	D2	D3
Fail-Safe Digital Input/Output, 4/4 Channels; 24 VDC; 2 A; PROFIsafe V 2.0 iPar	750-667/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
		Source	C0	M		x		Sink	C0	C1	C2	C3
		Source	D0	M		x		Sink	D0	D1	D2	D3
Fail-Safe Digital Input/Output, 4/4 Channels; 24 VDC; 2 A; PROFIsafe V 2.0 iPar	753-667/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
		Source	C0	M		x		Sink	C0	C1	C2	C3
		Source	D0	M		x		Sink	D0	D1	D2	D3
Fail-Safe Digital Input/Relay Output, 4/4 Channels; 48 VAC/60 VDC; 6 A; PROFIsafe V 2.0 iPar	750-669/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3
		Source	A	-				Sink	A	-	-	-
		Source	C0	M			x	Sink	C0	C1	C2	C3
Intrinsically Safe Input												
Intrinsically Safe 4-Channel Digital Input; 24 VDC; PROFIsafe V 2.0 iPar	750-663/000-003	Sink	A	-				Source	A	-	-	-
		Sink	C0	M	x			Source	C0	C1	C2	C3

Classification of Binary 24 V Interfaces with Testing in the Field of Functional Safety per ZVEI Position Paper CB24I

Interface Type A – Sink	Item: 75x-661/000-003; 75x-662/000-003; 75x-666/000-003; 75x-667/000-003; 750-669/000-003			Item: 75x-663/000-003		
Parameter	Min.	Typ. (24 V)	Max.	Min.	Typ. (24 V)	Max.
Input current I_i (in the ON state)	>2 mA	-	<9 mA	>2 mA	3 mA	<9 mA
Output voltage U_i	Field power supply -0.2 V	-	-	Field power supply -0.2 V	-	-
Input capacitance C_i	-	-	12 nF	-	-	12 nF
Additional measure "M"	<ul style="list-style-type: none"> Parameterize filter time; activate short circuit test 			<ul style="list-style-type: none"> Parameterize filter time; activate short circuit test 		

Interface Type C – Sink, Class C0	Item: 75x-661/000-003; 75x-662/000-003; 75x-666/000-003; 75x-667/000-003; 750-669/000-003			Item: 75x-663/000-003		
Parameter	Min.	Typ. (24 V)	Max.	Min.	Typ. (24 V)	Max.
Test pulse duration t_i	0.5 ms	-	200 ms	0.5 ms	-	200 ms
Test pulse interval T	18 ms	42 ms	1230 ms	18 ms	42 ms	1230 ms
Input resistance R	-	3.6 kΩ	8.5 kΩ	-	2.4 kΩ	8.5 kΩ
Input capacitance C_L	-	-	12 nF	-	-	12 nF
Inductance L_L	-	-	-	-	-	-
Additional measure "M"	<ul style="list-style-type: none"> Parameterize filter time Deactivate short circuit test 			<ul style="list-style-type: none"> Parameterize filter time Deactivate short circuit test 		

Interface Type C – Sink, Class C1	Item: 75x-661/000-003; 75x-662/000-003; 75x-666/000-003; 75x-667/000-003; 750-669/000-003			Item: 75x-663/000-003		
Parameter	Min.	Typ. (24 V)	Max.	Min.	Typ. (24 V)	Max.
Test pulse duration t_i	2 ms	-	200 ms	2 ms	-	200 ms
Test pulse interval T	18 ms	42 ms	1230 ms	18 ms	42 ms	1230 ms
Input resistance R	-	3.6 kΩ	8.5 kΩ	-	2.4 kΩ	8.5 kΩ
Input capacitance C_L	-	-	12 nF	-	-	12 nF
Inductance L_L	-	-	-	-	-	-
Additional measure "M"	<ul style="list-style-type: none"> Parameterize filter time to at least 2 ms Deactivate short circuit test 			<ul style="list-style-type: none"> Parameterize filter time to at least 2 ms Deactivate short circuit test 		

Interface Type C – Sink, Class C2	Item: 75x-661/000-003; 75x-662/000-003; 75x-666/000-003; 75x-667/000-003; 750-669/000-003			Item: 75x-663/000-003		
Parameter	Min.	Typ. (24 V)	Max.	Min.	Typ. (24 V)	Max.
Test pulse duration t_i	1 ms	-	200 ms	1 ms	-	200 ms
Test pulse interval T	18 ms	42 ms	1230 ms	18 ms	42 ms	1230 ms
Input resistance R	-	3.6 kΩ	8.5 kΩ	-	2.4 kΩ	8.5 kΩ
Input capacitance C_L	-	-	12 nF	-	-	12 nF
Inductance L_L	-	-	-	-	-	-
Additional measure "M"	<ul style="list-style-type: none"> Parameterize filter time to at least 1 ms Deactivate short circuit test 			<ul style="list-style-type: none"> Parameterize filter time to at least 1 ms Deactivate short circuit test 		

Interface Type C – Sink, Class C3	Item: 75x-661/000-003; 75x-662/000-003; 75x-666/000-003; 75x-667/000-003; 750-669/000-003			Item: 75x-663/000-003		
Parameter	Min.	Typ. (24 V)	Max.	Min.	Typ. (24 V)	Max.
Test pulse duration t_i	0.5 ms	-	200 ms	0.5 ms	-	200 ms
Test pulse interval T	18 ms	42 ms	1230 ms	18 ms	42 ms	1230 ms
Input resistance R	-	3.6 kΩ	8.5 kΩ	-	2.4 kΩ	8.5 kΩ
Input capacitance C_L	-	-	12 nF	-	-	12 nF
Inductance L_L	-	-	-	-	-	-
Additional measure "M"	<ul style="list-style-type: none"> Parameterize filter time to at least 0.5 ms Deactivate short circuit test 			<ul style="list-style-type: none"> Parameterize filter time to at least 0.5 ms Deactivate short circuit test 		

Classification of Binary 24 V Interfaces with Testing in the Field of Functional Safety per ZVEI Position Paper CB24I

Interface Type A – Source		Item: 750-669/000-003		
Parameter		Min.	Typ.	Max.
Switching current I_s		3 mA	-	6 A per contact
Switching voltage U_s		10 V	-	60 VDC / 48 VAC
Internal resistance R_s (in the switched state)		-	-	100 mΩ
Load capacitance C_L		-	-	-
Load inductance L_L		-	-	1.2 H
Potential-free		Yes		

Interface Type C – Source, Class C0		Item: 75x-666/000-003			Item: 75x-667/000-003		
Parameter		Min.	Typ.	Max.	Min.	Typ.	Max.
Test pulse duration t_i		2 ms	-	500 ms	1 ms	-	500 ms
Leakage current $I_{Leakage}$ of the output in the OFF state		-	-	<1 mA	-	-	1.2 mA
Nominal current I_N of the output in the ON state		-	-	10 A	20 mA	2 A	2.4 A
Capacitive load C_L		-	-	10,000 µF	-	-	2.2 µF
Inductive load L_L		-	-	1.2 H	-	-	1.2 H
Additional measure "M"		<ul style="list-style-type: none"> Parameterize test pulse duration Parameterize output tolerance time 			<ul style="list-style-type: none"> Parameterize test pulse duration 		

Interface Type D – Source, Class D0		Item: 75x-666/000-003			Item: 75x-667/000-003		
Parameter		Min.	Typ.	Max.	Min.	Typ.	Max.
Test pulse duration t_i		2 ms	-	500 ms	1 ms	-	500 ms
Leakage current $I_{Leakage}$ of the output in the OFF state		-	-	<1 mA	-	-	1.2 mA
Nominal current I_N of the output in the ON state		-	-	10 A	20 mA	2 A	2.4 A
Capacitive load C_L		-	-	10,000 µF	-	-	2.2 µF
Inductive load L_L		-	-	1.2 H	-	-	1.2 H
Additional measure "M"		<ul style="list-style-type: none"> Parameterize test pulse duration Parameterize output tolerance time 			<ul style="list-style-type: none"> Parameterize test pulse duration 		

Interface Type D – Source, Class D1		Item: 75x-667/000-003		
Parameter		Min.	Typ.	Max.
Test pulse duration t_i		-	-	1 ms
Leakage current $I_{Leakage}$ of the output in the OFF state		-	-	1.2 mA
Nominal current I_N of the output in the ON state		20 mA	2 A	2.4 A
Capacitive load C_L		-	-	2.2 µF
Inductive load L_L		-	-	1.2 H
Additional measure "M"		<ul style="list-style-type: none"> Parameterize test pulse duration to 1 ms 		

Interface Type D – Source, Class D1, D2, D3		Item: 75x-666/000-003			Item: 75x-667/000-003		
Parameter		Min.	Typ.	Max.	Min.	Typ.	Max.
Test pulse duration t_i		-	-	-	-	-	-
Leakage current $I_{Leakage}$ of the output in the OFF state		-	-	<1 mA	-	-	1.2 mA
Nominal current I_N of the output in the ON state		20 mA	2 A	10 A	20 mA	2 A	2.4 A
Capacitive load C_L		-	-	10,000 µF	-	-	2.2 µF
Inductive load L_L		-	-	1.2 H	-	-	1.2 H
Additional measure "M"		<ul style="list-style-type: none"> Parameterize test pulse duration to 0 ms (off) Parameterize output tolerance time Program safety application for automatic test: Switch off the output once every 8 h Parameterize output configuration 			<ul style="list-style-type: none"> Parameterize test pulse duration to 0 ms (off) Program safety application for automatic test: Switch off the output once every 8 h 		



Fail-Safe Digital Input or Digital Input/Output; 24 VDC; PROFIsafe



Figure: 750-660/000-001



Figure: 750-665/000-001

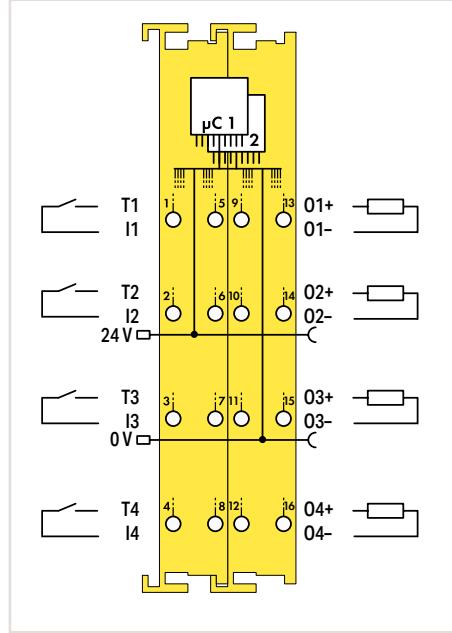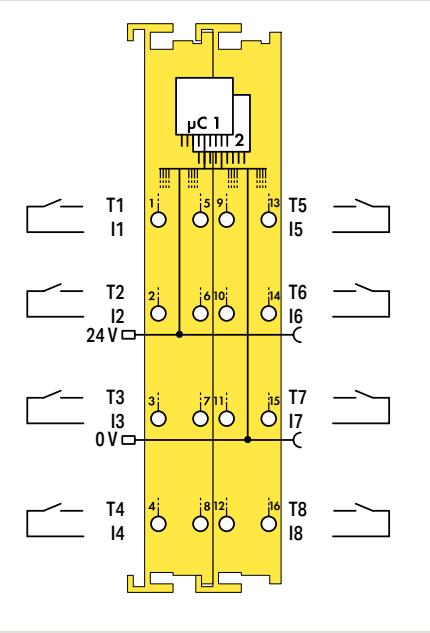

5.8

Item Description	Fail-Safe Digital Input, 8 Channels; 24 VDC; PROFIsafe			
Version	Standard			
Item No.	750-660/000-001			
Order Text	8FDI; 24 VDC; PROFIsafe			
Technical Data				
Number of digital inputs	8			
Achievable safety classes	8 x Cat. 2/SIL 2 or 4 x Cat. 4/SIL 3			
Protocol	PROFIsafe V1.3			
Configuration options	PROFIsafe address adjustable via DIP switch or engineering software			
Sensor connection	Fail-safe input with test pulse			
Input characteristic	Clock sensitive			
Input current per channel for signal (1) typ.	2.2 mA			
Number of digital outputs				
Output circuit design				
Actuator connection				
Switching frequency (max.) with load type				
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)			
Proof test interval	10 years			
Supply voltage (system)	5 VDC; via data contacts			
Current consumption – system supply (5 V)	40 mA			
Surrounding air temperature (operation)	0 ... +55 °C			
Dimensions W x H x D	24 x 70.9 x 100 mm			
Safety Standards	IEC 61508, parts 1-7, 1998 and 2000; EN 954-1 Cat. 4			
Approvals	CE; KC; UL OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-660/000-001			
<ul style="list-style-type: none"> “ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools" “ Approvals and corresponding ratings, see page 522 or www.wago.com 				

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 522 or www.wago.com



Fail-Safe Digital Input; 24 VDC; PROFIsafe V 2.0 iPar



Figure: 750-661/000-003



Figure: 750-662/000-003

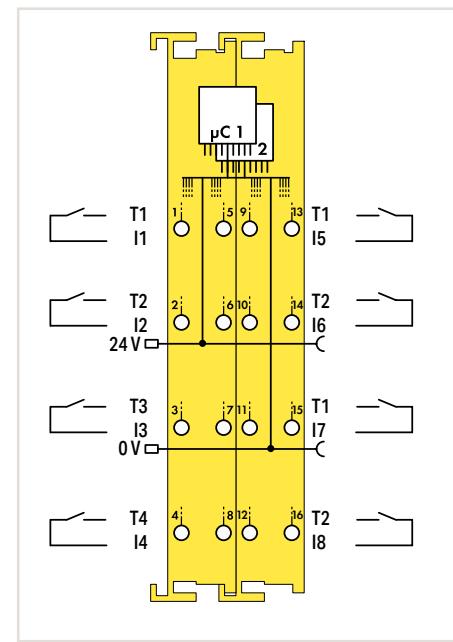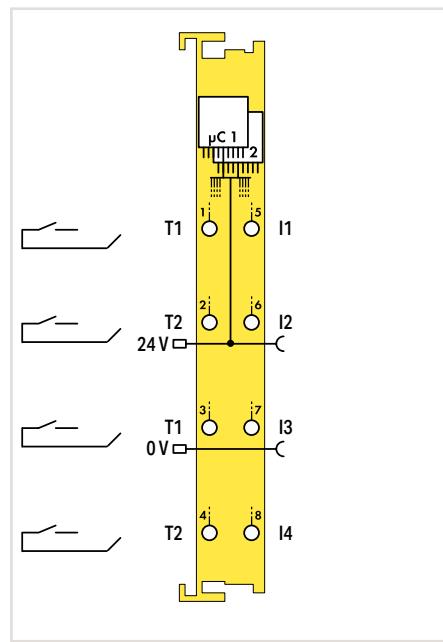

Item Description	Fail-Safe Digital Input, 4 Channels; 24 VDC; PROFIsafe V 2.0 iPar		Fail-Safe Digital Input, 8 Channels; 24 VDC; PROFIsafe V 2.0 iPar	
Version	Standard		Standard	
Item No.	750-661/000-003		753-661/000-003	
Order Text	4FDI; 24 VDC; PROFIsafe V2 iPar		4FDI; 24 VDC; PROFIsafe V2 iPar	

Technical Data	4	8
Pluggable connector	•	•
Number of digital inputs	4	8
Achievable safety classes	SIL 3; Cat. 4, PL e	SIL 3; Cat. 4, PL e
Protocol	PROFIsafe V2	PROFIsafe V2
Configuration options	PROFIsafe address adjustable via DIP switch or engineering software	PROFIsafe address adjustable via DIP switch or engineering software
Sensor connection	Fail-safe input with test pulse	Fail-safe input with test pulse
Input characteristic	Clock sensitive	Clock sensitive
Input current per channel for signal (1) typ.	2.2 mA	2.2 mA
Input characteristic	Type 1	Type 1
Signal frequency (max.)	50 Hz	50 Hz
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Supply voltage (system)	5 VDC; via data contacts	5 VDC; via data contacts
Current consumption – system supply (5 V)	145 mA	148 mA
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	24 x 70.9 x 100 mm	24 x 70.9 x 100 mm
Safety Standards	IEC 61508, Parts 1-7, Edition 2: 2010; EN ISO 13849-1: 2008 + AC: 2009; EN 62061	IEC 61508, Parts 1-7, Edition 2: 2010; EN ISO 13849-1: 2008 + AC: 2009; EN 62061
Approvals	CE; UL; Marine; ATEX/IECEx	CE; UL; Marine; ATEX/IECEx
Data sheet and further information, see:	wago.com/ 750-661/000-003	wago.com/ 753-661/000-003
Accessories	Item No.	Item No.
Pluggable connector, safety	753-120	753-120
Coding keys	753-150	753-150

Support for iPar servers allows automatic parameter restoration when replacing an I/O module.



Fail-Safe Digital Input/Output, 4/2 Channels; 24 VDC; 10 A; PROFIsafe V 2.0 iPar



Figure: 750-666/000-003



Figure: 753-666/000-003

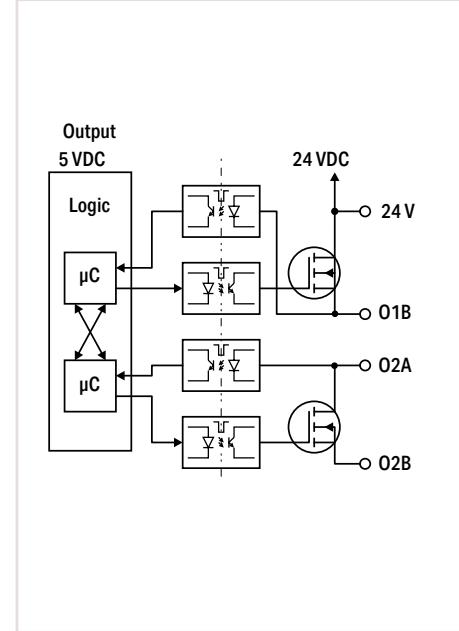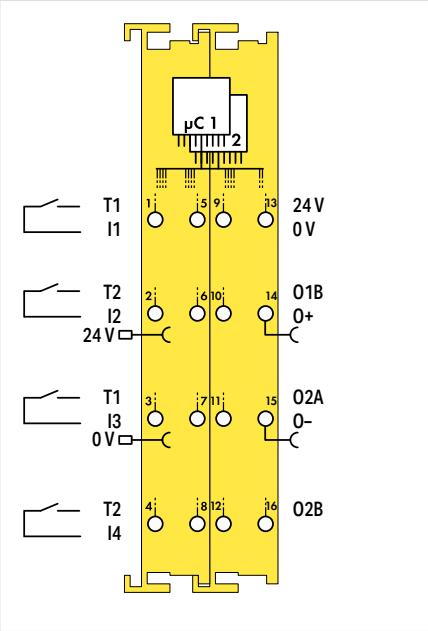

5.8

Item Description	Fail-Safe Digital Input/Output, 4/2 Channels; 24 VDC; 10 A; PROFIsafe V 2.0 iPar	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-666/000-003	753-666/000-003
Order Text	4FDI/2FDO; 24 VDC; 10A; PROFIsafe V2 iPar	4FDI/2FDO; 24 VDC; 10A; PROFIsafe V2 iPar

Technical Data

Pluggable connector	•
Number of digital inputs	4
Achievable safety classes	SIL 3; Cat. 4, PL e
Protocol	PROFIsafe V2
Configuration options	PROFIsafe address adjustable via DIP switch or engineering software
Sensor connection	Fail-safe input with test pulse
Input characteristic	Clock sensitive
Input current per channel for signal (1) typ.	2.2 mA
Signal frequency (max.)	50 Hz
Number of digital outputs	2
Output circuit design	Power outputs
Actuator connection	2 x (fail-safe output with test pulse)
Output current per channel	10 A
Output current (module) max.	20 A (single operation)
Protection against incorrect wiring	Short-circuit-protected
Switching frequency (max.) with load type	50 Hz, ohmic load; 0.1 Hz, inductive load
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)

Supply voltage (system)	5 VDC; via data contacts
Current consumption – system supply (5 V)	190 mA
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 70.9 x 100 mm
Safety Standards	IEC 61508, Parts 1-7, Edition 2: 2010; EN ISO 13849-1: 2008 + AC: 2009; EN 62061

Approvals	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-666/000-003 wago.com/753-666/000-003

Accessories	Item No.
Pluggable connector, safety	753-120
Coding keys	753-150

„ Approvals and corresponding ratings,
see page 522 or www.wago.com

This module enables a fail-safe 2-channel switch-off (single failure protection) when the power outputs are used in a bipolar configuration. If a fail-safe 1-channel switch-off is adequate, two independent switching channels are available.

The module is capable of safely shutting off the supply voltage of entire actuator groups which are connected to the standard modules arranged to the right.

The 2-channel circuit types P-M and P-P as well as the 1-channel circuit types P, P or P, M are available.

Support for iPar servers allows automatic parameter restoration when replacing an I/O module.


Fail-Safe Digital Input/Output, 4/4 Channels; 24 VDC; 2 A; PROFIsafe V 2.0 iPar



Figure: 750-667/000-003



Figure: 753-667/000-003

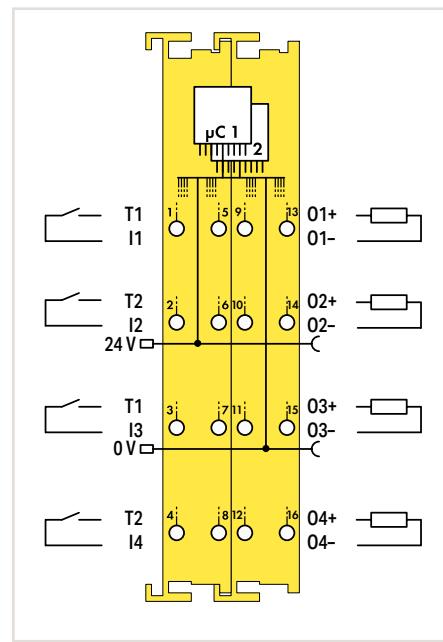

Item Description	Fail-Safe Digital Input/Output, 4/4 Channels; 24 VDC; 2 A; PROFIsafe V 2.0 iPar	
Version	Pluggable (delivery without connector)	
Item No.	750-667/000-003	753-667/000-003
Order Text	4FDI/4FDO; 24 VDC; 2A; PROFIsafe V2 iPar	4FDI/4FDO; 24 VDC; 2A; PROFIsafe V2 iPar


Technical Data

Pluggable connector	●
Number of digital inputs	4
Achievable safety classes	SIL 3; Cat. 4, PL e
Protocol	PROFIsafe V2
Configuration options	PROFIsafe address adjustable via DIP switch or engineering software
Sensor connection	Fail-safe input with test pulse
Input characteristic	Clock sensitive
Input current per channel for signal (1) typ.	2.2 mA
Signal frequency (max.)	50 Hz
Number of digital outputs	4
Output circuit design	Power outputs
Actuator connection	4 x (fail-safe output with test pulse)
Output current per channel	2 A
Output current (module) max.	8 A
Protection against incorrect wiring	Short-circuit-protected
Switching frequency (max.) with load type	50 Hz, ohmic load; 0.1 Hz, inductive load
Supply voltage (field)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Supply voltage (system)	5 VDC; via data contacts
Current consumption – system supply (5 V)	180 mA
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 70.9 x 100 mm
Safety Standards	IEC 61508, Parts 1-7, Edition 2: 2010; EN ISO 13849-1: 2008 + AC: 2009; EN 62061
Approvals	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/ 750-667/000-003 wago.com/ 753-667/000-003
Accessories	Item No.
Pluggable connector, safety	753-120
Coding keys	753-150

The 2-channel circuit types P-M and P-P as well as the 1-channel circuit types P, P or P, M are available at each output. When two 1-channel P circuits are used, Categories 4/PLe or SIL3 are possible.

Support for iPar servers allows automatic parameter restoration when replacing an I/O module.

Fail-Safe Digital Input/Relay Output, 4/4 Channels; 48 VAC/60 VDC; 6 A; PROFIsafe V 2.0 iPar

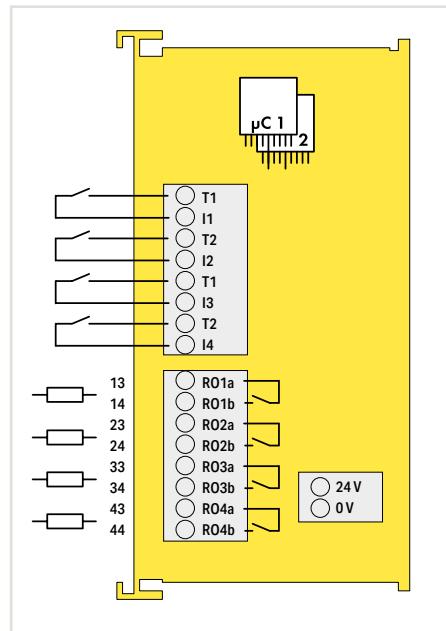


5.8

Item Description	Fail-Safe Digital Input/Relay Output, 4/4 Channels; 48 VAC/60 VDC; 6 A; PROFIsafe V 2.0 iPar	Support for iPar servers allows automatic parameter restoration when replacing an I/O module.
Item No.	750-669/000-003	
Order Text	4FDI/4FRO; 48VAC/ 60VDC; 6A; PROFIsafe V2 iPar	
Technical Data		
Number of digital inputs	4	
Achievable safety classes	SIL 3; Cat. 4, PL e	
Protocol	PROFIsafe V2	
Configuration options	PROFIsafe address adjustable via DIP switch or engineering software	
Sensor connection	4 x (fail-safe input with test pulse)	
Input characteristic	Clock sensitive	
Input current per channel for signal (1) typ.	2.2 mA	
Input characteristic	Type 1	
Signal frequency (max.)	50 Hz	
Number of digital outputs	4	
Output circuit design	Relay outputs	
Actuator connection	4 x (fail-safe output with test pulse)	
Load switching voltage range	5 ... 60 VDC (SELV/PELV); 5 ... 48 VAC	
Isolation voltage	Relay outputs: 48 VAC; 60 VDC	
Switching current (min.)	3 mA	
Output current per channel	6 A	
Output current (module) max.	24 A	
Switching delay	50 ms	
Supply voltage (field)	24 VDC via wiring level (push-in CAGE CLAMP® connector)	
Supply voltage (system)	5 VDC; via data contacts	
Current consumption – system supply (5 V)	120 mA	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	24 x 70.9 x 100 mm	
Safety Standards	IEC 61508, Parts 1-7, Edition 2: 2010; EN ISO 13849-1: 2008 + AC: 2009; EN 62061	
Approvals	CE, UL	
Data sheet and further information, see:	wago.com/750-669/000-003	

" Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

" Approvals and corresponding ratings,
see page 522 or www.wago.com

Intrinsically Safe 4-Channel Digital Input; 24 VDC; PROFIsafe V 2.0 iPar

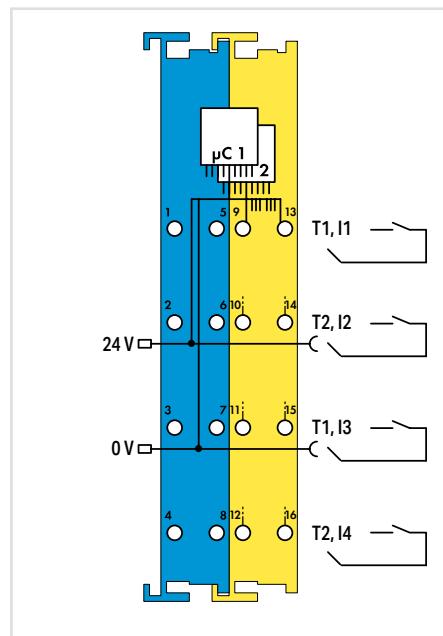

Item Description	Intrinsically Safe 4-Channel Digital Input; 24 VDC; PROFIsafe V 2.0 iPar	5.8
Item No.	750-663/000-003	
Order Text	4F-Ex i DI; 24 VDC; PROFIsafe V2 iPar	
Technical Data		
Protocol	PROFIsafe V2	
Configuration options	PROFIsafe address adjustable via DIP switch or engineering software	
Sensor inputs	I4; clock sensitive to T1 ... T2	
Input current (typ.)	3 mA	
Input frequency (max.)	50 Hz	
Input filter (digital)	0 ... 200 ms, parameterizable in steps	
Clock outputs	2	
Supply voltage (field)	24 VDC (Ex i power supply: U_o = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current consumption, field supply (module with no external load)	20 mA	
Current consumption – system supply (5 V)	145 mA	
Isolation	$U_m = 375$ V system/supply	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	24 x 67.8 x 100 mm	
Functional Safety		
Achievable risk reduction	SIL 3 per IEC 61508:2010; SIL 3 per IEC 61511:2005; SIL 3 per IEC 62061:2005; Cat. 4, PL e per EN ISO 13849:2008	
Safety standards	IEC 61508; IEC 62061; EN ISO 13849; IEC 61511	
Explosion Protection		
Safety-relevant data (circuit)	$U_o = 27.3$ V; $I_o = 23$ mA; $P_o = 157$ mW; Linear characteristic curve	
Reactances Ex ia IIC	$L_o = 61$ mH; $C_o = 64$ nF	
Reactances Ex ia IIB	$L_o = 100$ mH; $C_o = 552$ nF	
Reactances Ex ia IIA	$L_o = 100$ mH; $C_o = 2.28$ µF	
Reactances Ex ia I	$L_o = 100$ mH; $C_o = 2.95$ µF	
Ex guideline		
Approvals	EN IEC 60079-0, -7, -11 Marine; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO	
Marking	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I	
Data sheet and further information, see:	wago.com/750-663/000-003	

Intrinsically Safe Modules Ex i




Specialty Housing

Dimensions W x H x D	48 x 70.9 x 100
Height from upper-edge of DIN-rail	63.7 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 1.5 mm ² / 28 ... 16 AWG
Strip length	5 ... 6 mm / 0.22 inch

Housing Design (750 Series)


Dimensions W x H x D	12 or 24 x 67.8 x 100 mm
Height from upper-edge of DIN-rail	60.6 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch

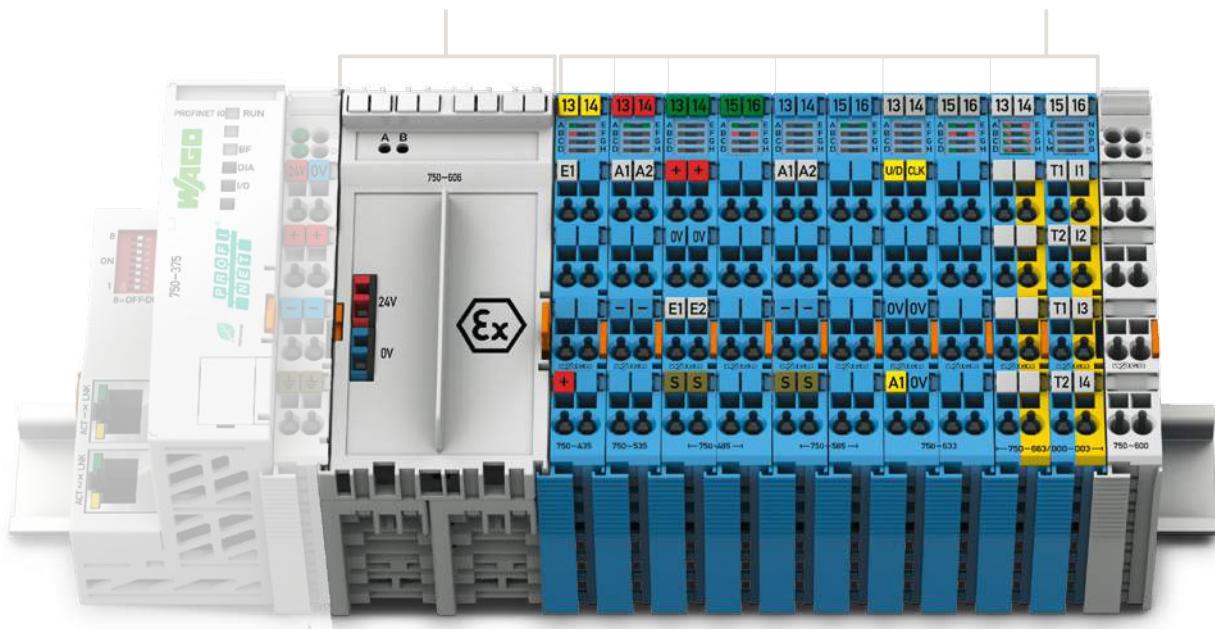

Use in Hazardous Areas

In many plants across the chemical and petrochemical industries, as well as in the production and process automation sectors, installations are operated that process explosive gas- or dust-air mixtures. This is why electrical equipment must be explosion-proof in order to avoid injuries to personnel and damage to equipment.


The modules within the WAGO-I/O-SYSTEM 750 are designed for use in both non-hazardous and hazardous areas. The direct application of fieldbus technology in potentially explosive areas is typically resource-intensive. When used in hazardous areas of Zone 2/22, the WAGO-I/O-SYSTEM 750 offers a safe, easy and economical connection to the sensors and actuators of Zones 0/20 and 1/21. The "blue" Ex i I/O modules were specially developed for this purpose. They form an intrinsically safe section that can be integrated into a standard fieldbus node, offering all the advantages of state-of-the-art fieldbus technology. The WAGO-I/O-SYSTEM 750 is also approved for mining applications.

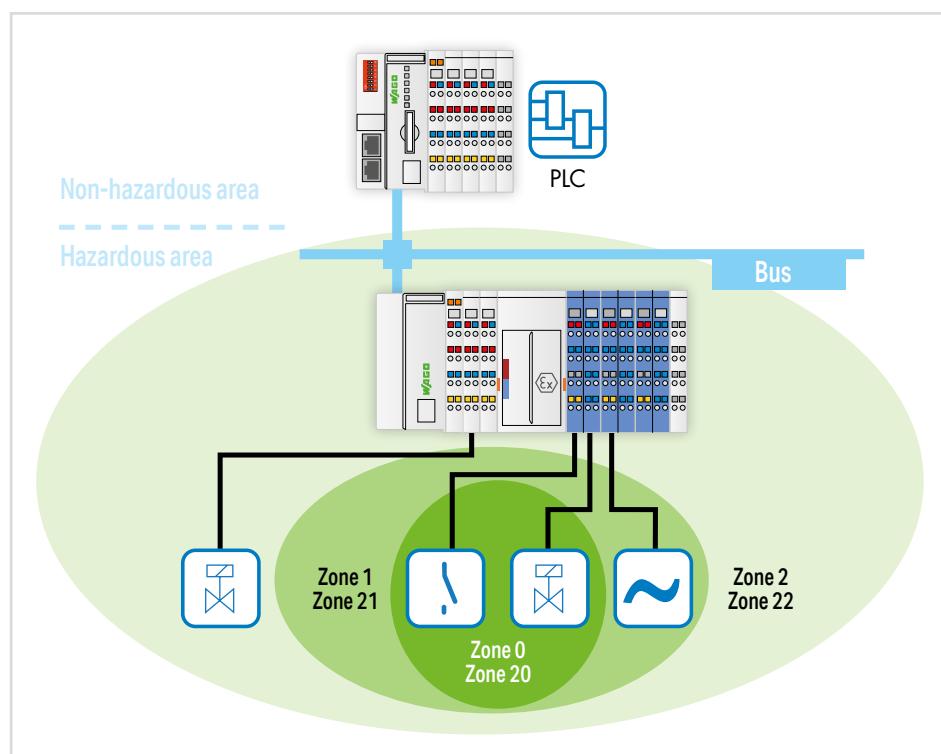

I/O System – 750 and 753 Series; Intrinsically Safe Modules Ex i

Contents

Function	Description	Item Number	Page
Power Supplies Ex i	Power Supply; 24 VDC; Diagnostics; Intrinsically safe	750-606*	310
	Power Supply; 24 VDC; Intrinsically safe	750-625/000-001	310
Digital Inputs Ex i for Proximity Sensors per EN 60947-5-6	1-Channel Digital Input; NAMUR; Intrinsically safe	750-435	311
	2-Channel Digital Input; NAMUR; Intrinsically safe	750-438	311
	Intrinsically Safe 4-Channel Digital Input; 24 VDC; PROFIsafe V 2.0 iPar	750-663/000-003	312
	8-Channel Digital Input; NAMUR; Intrinsically safe	750-439*	313
Digital Outputs Ex i	2-Channel Digital Output; 24 VDC; Intrinsically safe	750-535*	314
	4-Channel Digital Output; 24 VDC; Valve; Intrinsically safe	750-539	314
	2-Channel Relay Output; Changeover contact; Potential-free; Intrinsically safe	750-538	315
Analog Inputs Ex i	2-Channel Analog Input; 4 ... 20 mA; Intrinsically safe	750-485	316
	4-Channel Analog Input; 0/4 ... 20 mA; NAMUR NE43; Intrinsically safe	750-486*	316
	2-Channel Analog Input; 4 ... 20 mA HART; Intrinsically safe	750-484*	317
	2-Channel Analog Input; 4 ... 20 mA HART; NAMUR NE43; Intrinsically safe	750-484/000-001	317
	2-Channel Analog Input; RTD; Intrinsically safe	750-481/003-000*	318
	2-Channel Analog Input; TC; Intrinsically safe	750-487/003-000	318
Analog Outputs Ex i	2-Channel Analog Output; 0 ... 20 mA; Intrinsically safe	750-585*	319
	2-Channel Analog Output; 4 ... 20 mA; Intrinsically safe	750-586	319
Function Module Ex i	Up/Down Counter; Intrinsically safe	750-633*	320
*This module is also available as a variant of the 750 XTR Series.			See Section 6

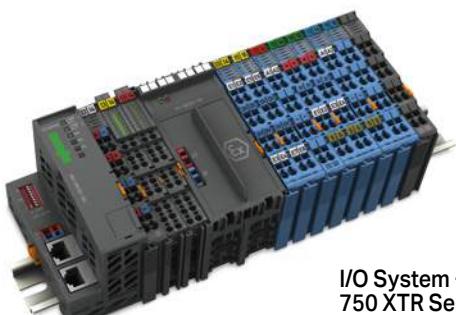5.9
Ex i

I/O System –
750 XTR Series

Power Supply; Ex i



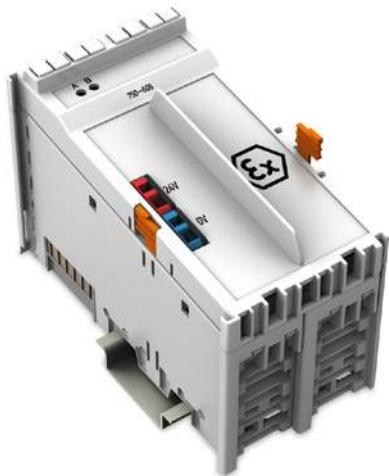


Figure: 750-606

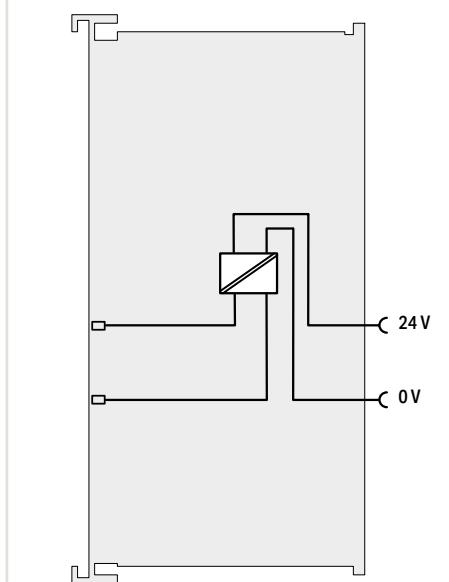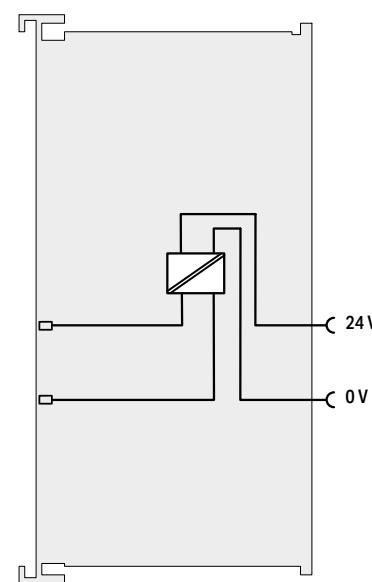

Item Description	Power Supply; 24 VDC; Diagnostics; Intrinsically safe	
Item No.	750-606	Power Supply; 24 VDC; Intrinsically safe
Order Text	Power Supply; 24 VDC; Diagn; Ex i	Power Supply; 24 VDC; Ex i
5.9		
Technical Data		
Current consumption – system supply (5 V)	7.5 mA	7.5 mA
Input voltage	24 VDC (-25 ... +30 %)	24 VDC (-25 ... +30 %)
Supply voltage (field)	24 VDC (adjacent Ex i modules are supplied with $U_o = \text{max. } 27.3 \text{ V}$; via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact))	24 VDC (adjacent Ex i modules are supplied with $U_o = \text{max. } 27.3 \text{ V}$; via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact))
Current carrying capacity (power jumper contacts)	1 ADC	1 ADC
Fuse	Electronic	Electronic
Data width	2 bits (input voltage failure, fuse triggered)	
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	24 x 70.9 x 100 mm	24 x 70.9 x 100 mm
Explosion Protection		
Power supply (input)	$U_n = 24 \text{ VDC}; P_{\text{max}} = 29 \text{ W}; U_m = 253 \text{ V}$	$U_n = 24 \text{ VDC}; P_{\text{max}} = 29 \text{ W}; U_m = 253 \text{ V}$
Power supply (output)	$U_o = 27.3 \text{ V}$ (intrinsically safe output voltage per protection level ia); $I_o = 1 \text{ A}$	$U_o = 27.3 \text{ V}$ (intrinsically safe output voltage per protection level ia); $I_o = 1 \text{ A}$
Ex guideline	EN IEC 60079-0, -7, -11	EN IEC 60079-0, -7, -11
Approvals	CE; IC; Marine; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO	CE; IC; Marine; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO
Marking	II 3G Ex ec IIC T4 Gc	II 3G Ex ec IIC T4 Gc
Data sheet and further information, see:	wago.com/750-606	wago.com/750-625/000-001

The supply modules monitor the voltage supply of the downstream intrinsically safe segment and separate the intrinsically safe from the non-intrinsically safe section of the I/O system. The input and output sides are electrically isolated from each other.

Note: If, due to load conditions, more than one supply module is required per station, four spacer modules (750-616) must be placed between the intrinsically safe sections.

General information (e.g., installation regulations) on explosion protection is available in the WAGO-I/O-SYSTEM 750 manuals!


“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 523, 518 or www.wago.com

Digital Input; NAMUR; Ex i




Figure: 750-435

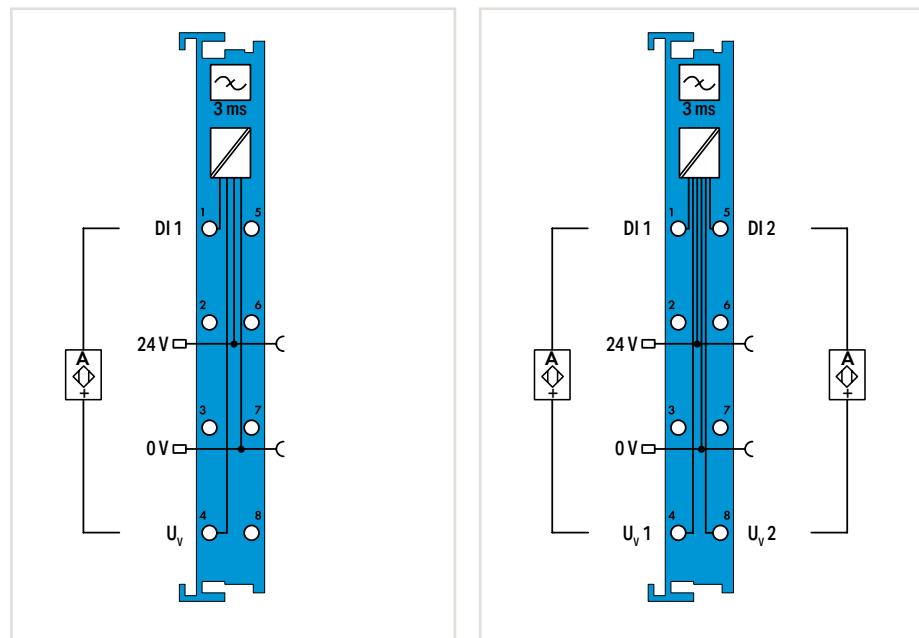

Item Description	1-Channel Digital Input; NAMUR; Intrinsically safe	2-Channel Digital Input; NAMUR; Intrinsically safe
Item No.	750-435	750-438
Order Text	1DI; NAMUR; Ex i	2DI; NAMUR; Ex i
Technical Data		
Number of digital inputs	1	2
Signal type	NAMUR	NAMUR
Sensor connection	2-wire	2-wire
Input characteristic	High-side switching	High-side switching
Input filter (digital)	3 ms	3 ms
Open-circuit voltage	8.2 VDC	8.2 VDC
Diagnostics	Short circuit; wire break	-/-
Supply voltage (sensor)	8.2 VDC; short-circuit-protected; isolated channels	8.2 VDC; short-circuit-protected; isolated channels
Supply voltage (field)	24 VDC (Ex i power supply: $U_0 = \text{max. } 27.3 \text{ V}$; via power jumper contacts (power supply via blade contact; transmission via spring contact))	24 VDC (Ex i power supply: $U_0 = \text{max. } 27.3 \text{ V}$; via power jumper contacts (power supply via blade contact; transmission via spring contact))
Current consumption, field supply (module with no external load)	13 mA	16 mA
Current consumption – system supply (5 V)	2.5 mA	2.5 mA
Data width (internal)	2 bits	2 bits
Isolation	$U_m = 375 \text{ V}$ system/supply	$U_m = 375 \text{ V}$ system/supply
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm	12 x 67.8 x 100 mm
Explosion Protection		
Safety-relevant data (circuit)	$U_o = 12 \text{ V}; I_o = 16 \text{ mA}; P_o = 48 \text{ mW};$ Linear characteristic curve $L_o = 180 \text{ mH}; C_o = 1.4 \mu\text{F}$	$U_o = 12 \text{ V}; I_o = 13.5 \text{ mA}; P_o = 40.5 \text{ mW};$ Linear characteristic curve $L_o = 190 \text{ mH}; C_o = 1.4 \mu\text{F}$
Reactances Ex ia IIC	$L_o = 560 \text{ mH}; C_o = 9 \mu\text{F}$	$L_o = 600 \text{ mH}; C_o = 9 \mu\text{F}$
Reactances Ex ia IIA	$L_o = 900 \text{ mH}; C_o = 36 \mu\text{F}$	$L_o = 1 \text{ H}; C_o = 36 \mu\text{F}$
Reactances Ex ia I	$L_o = 1 \text{ H}; C_o = 38 \mu\text{F}$	$L_o = 1 \text{ H}; C_o = 38 \mu\text{F}$
Reactances	Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)	Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)
Ex guideline	EN IEC 60079-0, -7, -11	EN IEC 60079-0, -7, -11
Approvals	CE; ; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO	CE; ; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO
Marking	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I
Data sheet and further information, see:	wago.com/750-435	wago.com/750-438

Digital Input; NAMUR; Ex i

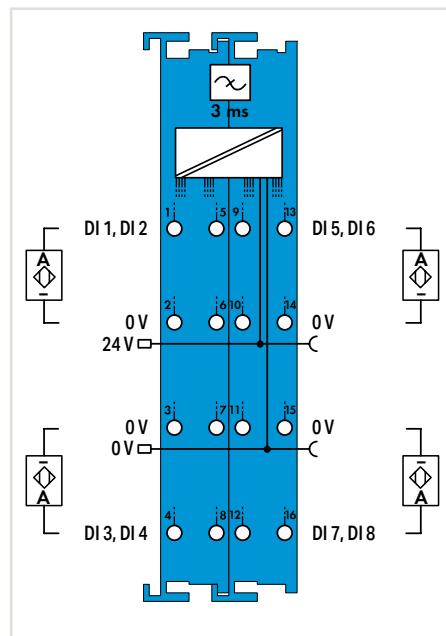


Item Description	8-Channel Digital Input; NAMUR; Intrinsically safe
Item No.	750-439
Order Text	8DI; NAMUR; Ex i
5.9	
Technical Data	
Number of digital inputs	8
Signal type	NAMUR
Sensor connection	2-wire
Input characteristic	High-side switching
Input filter (digital)	3 ms
Open-circuit voltage	8.2 VDC
Diagnostics	Short circuit; wire break (can be switched off)
Supply voltage (sensor)	8.2 VDC; short-circuit-protected; isolated channels
Supply voltage (field)	24 VDC (Ex i power supply: U_o = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	11 mA
Current consumption – system supply (5 V)	56 mA
Data width (internal)	16 bits
Isolation	U_m = 375 V system/supply
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 67.8 x 100 mm
Explosion Protection	
Safety-relevant data (circuit)	U_o = 11.76 V; I_o = 12.4 mA; P_o = 36.67 mW; Linear characteristic curve
Reactances Ex ia IIC	L_o = 100 mH; C_o = 1 µF
Reactances Ex ia IIB	L_o = 100 mH; C_o = 9.9 µF
Reactances Ex ia IIA	L_o = 100 mH; C_o = 39 µF
Reactances Ex ia I	L_o = 100 mH; C_o = 30 µF
Ex guideline	EN IEC 60079-0, -7, -11
Approvals	CE; IECEx; Marine; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO
Marking	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I
Data sheet and further information, see:	wago.com/750-439

“ Mini-WSB marker card and mounting accessories,
see Section “Accessories and Tools”

“ Approvals and corresponding ratings,
see page 518, 522 or www.wago.com

Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)

Intrinsically Safe 4-Channel Digital Input; 24 VDC; PROFIsafe V 2.0 iPar

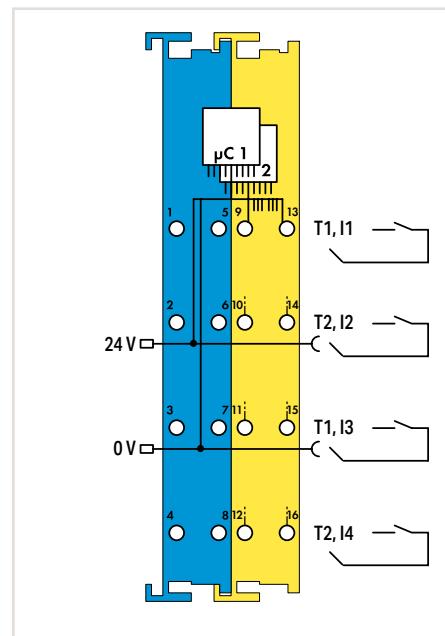

Item Description	Intrinsically Safe 4-Channel Digital Input; 24 VDC; PROFIsafe V 2.0 iPar
Item No.	750-663/000-003
Order Text	4F-Ex i DI; 24 VDC; PROFIsafe V2 iPar
Technical Data	
Protocol	PROFIsafe V2
Configuration options	PROFIsafe address adjustable via DIP switch or engineering software
Sensor inputs	4; clock sensitive to T1 ... T2
Input current (typ.)	3 mA
Input frequency (max.)	50 Hz
Input filter (digital)	0 ... 200 ms (configurable in steps)
Clock outputs	2
Supply voltage (field)	24 VDC (Ex i power supply: U_o = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	20 mA
Current consumption – system supply (5 V)	145 mA
Isolation	$U_m = 375$ V system/supply
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 67.8 x 100 mm
Functional Safety	
Achievable risk reduction	SIL 3 per IEC 61508:2010; SIL 3 per IEC 61511:2005; SIL 3 per IEC 62061:2005; Cat. 4, PL e per EN ISO 13849:2008
Safety standards	IEC 61508; IEC 62061; EN ISO 13849; IEC 61511
Explosion Protection	
Safety-relevant data (circuit)	$U_o = 27.3$ V; $I_o = 23$ mA; $P_o = 157$ mW; Linear characteristic curve
Reactances Ex ia IIC	$L_o = 61$ mH; $C_o = 64$ nF
Reactances Ex ia IIB	$L_o = 100$ mH; $C_o = 552$ nF
Reactances Ex ia IIA	$L_o = 100$ mH; $C_o = 2.28$ µF
Reactances Ex ia I	$L_o = 100$ mH; $C_o = 2.95$ µF
Ex guideline	EN IEC 60079-0, -7, -11
Approvals	CE; Marine; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO
Marking	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I
Data sheet and further information, see:	wago.com/750-663/000-003

This module combines intrinsic safety with functional safety and was specifically developed for reliable acquisition from potential-free, contact-based emergency stop switches, safety interlock switches, mode selectors and safety sensors that are located in hazardous environments.

Thus, safety functions with fail-safe sensors from Ex Zones 0 and 1 can be implemented.

Support for iPar servers allows automatic parameter restoration when replacing an I/O module.

Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)



Digital Output; 24 VDC; Ex i



Figure: 750-535



Figure: 750-539

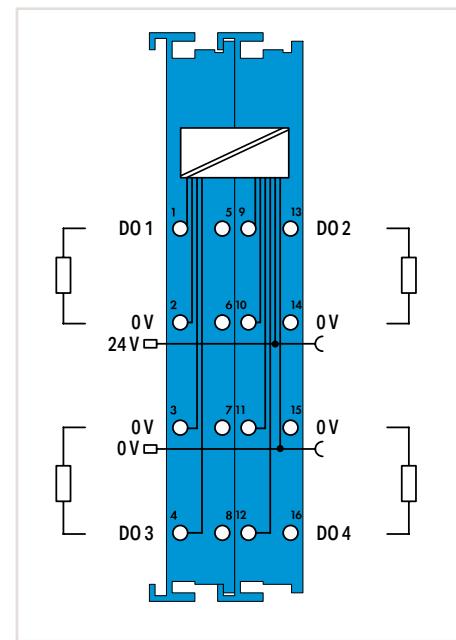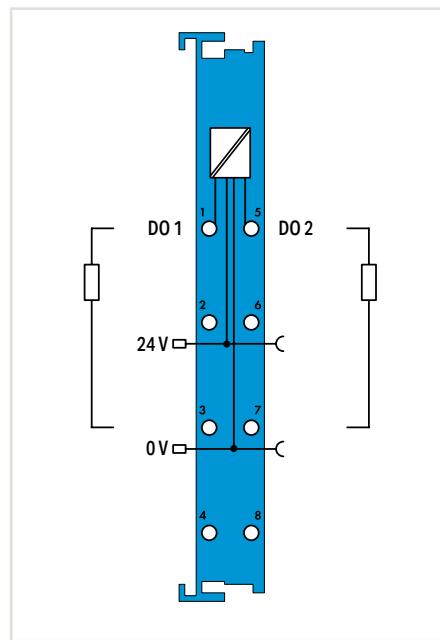


Item Description	2-Channel Digital Output; 24 VDC; Intrinsically safe			
Item No.	750-535			
Order Text	2DO; 24 VDC; Ex i			
5.9				
Technical Data				
Number of digital outputs	2	4		
Signal type	24 VDC	24 VDC		
Output characteristic	High-side switching	High-side switching		
Load type	Resistive; inductive; lamp load	Resistive; inductive; lamp load		
Actuator connection	2-wire	2-wire		
Switching frequency (max.)	1 kHz	100 Hz		
Supply voltage (field)	24 VDC (Ex i power supply: $U_o = \text{max. } 27.3 \text{ V}$; via power jumper contacts (power supply via blade contact; transmission via spring contact))	24 VDC (Ex i power supply: $U_o = \text{max. } 27.3 \text{ V}$; via power jumper contacts (power supply via blade contact; transmission via spring contact))		
Current consumption, field supply (module with no external load)	8.5 mA	10 mA		
Current consumption – system supply (5 V)	7 mA	20 mA		
Data width (internal)	2 bits	4-bit output; 4-bit input (diagnostics)		
Isolation	$U_m = 375 \text{ V}$ system/supply	$U_m = 375 \text{ V}$ system/supply		
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C		
Dimensions W x H x D	12 x 67.8 x 100 mm	24 x 67.8 x 100 mm		
Explosion Protection				
Safety-relevant data (circuit)	$U_o = 27.3 \text{ V}; I_o = 106 \text{ mA}; P_o = 723 \text{ mW};$ Linear characteristic curve	$U_o = 27.3 \text{ V}; I_o = 117.5 \text{ mA}; P_o = 800.1 \text{ mW};$ Linear characteristic curve		
Reactances Ex ia IIC	$L_o = 3 \text{ mH}; C_o = 88 \text{ nF}$	$L_o = 13 \mu\text{H}; C_o = 88 \text{ nF}$		
Reactances Ex ia IIB	$L_o = 12 \text{ mH}; C_o = 680 \text{ nF}$	$L_o = 8.1 \text{ mH}; C_o = 683 \text{ nF}$		
Reactances Ex ia IIA	$L_o = 18 \text{ mH}; C_o = 2.2 \mu\text{F}$	$L_o = 14 \text{ mH}; C_o = 2.28 \mu\text{F}$		
Reactances Ex ia I	$L_o = 20 \text{ mH}; C_o = 3.6 \mu\text{F}$	$L_o = 21 \text{ mH}; C_o = 3.6 \mu\text{F}$		
Reactances	Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)	Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)		
Ex guideline	EN IEC 60079-0, -7, -11	EN IEC 60079-0, -7, -11		
Approvals	CE; Marine; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO	CE; Marine; ATEX/IECEx		
Marking	④ ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I	④ ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I		
Data sheet and further information, see:	wago.com/750-535	wago.com/750-539		

“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 519 or www.wago.com

Relay Output; Ex i

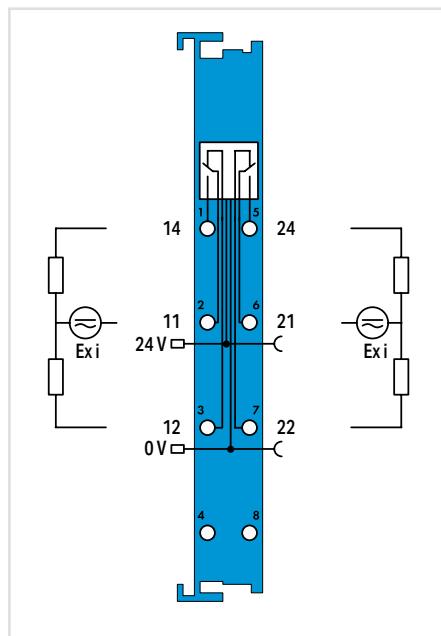



Item Description	2-Channel Relay Output; Changeover contact; Potential-free; Intrinsically safe
Item No.	750-538
Order Text	2RO; Changeover contacts; Pot-free; Ex i
Technical Data	
Number of digital outputs	2
Signal type	100 VAC; 30 VDC*
Output circuit design	Relay with 2 changeover contacts
Output characteristic	Potential-free
Output current per channel	0.5 AAC; 1 ADC*
Actuator connection	2-wire
Switching frequency (max.)	0.33 Hz
Supply voltage (field)	24 VDC (Ex i power supply: U_0 = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	24 mA
Current consumption – system supply (5 V)	26 mA
Data width (internal)	2 bits
Isolation	$U_m = 375$ V system/supply
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 67.8 x 100 mm
Explosion Protection	
Safety-relevant data (circuit)	Relay output: $U_i = DC\ 30\ V; I_i = 1\ A; P_i = 30\ W;$ $U_i = AC\ 100\ V; I_i = 0.5\ A; P_i = 50\ VA;$ $L_i = \text{negligible};$ $C_i = \text{negligible}$
Ex guideline	EN IEC 60079-0, -7, -11
Approvals	CE, Marine; ATEX/IECEx; INMETRO
Marking	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I
Data sheet and further information, see:	wago.com/750-538

*Details on relay!
Both maximum switching current and voltage must comply with EN 60079-11.

Analog Input; 4 ... 20 mA or 0/4 ... 20 mA; Ex i



Figure: 750-486

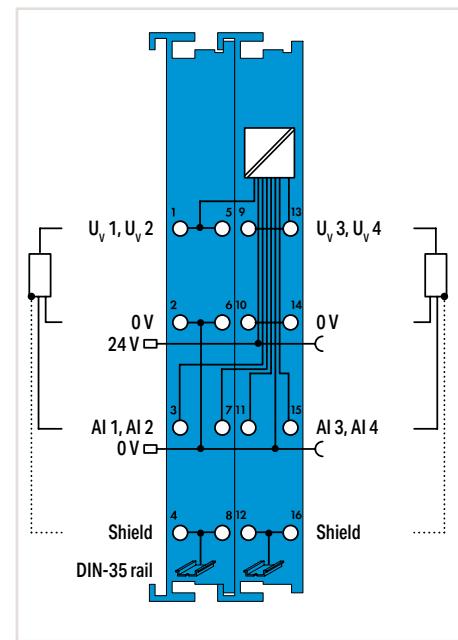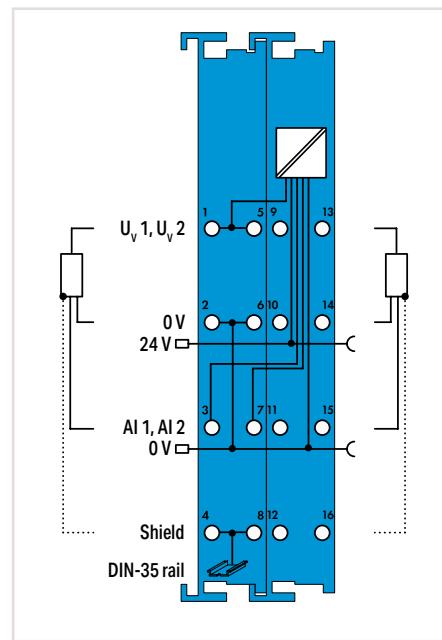

Item Description	2-Channel Analog Input; 4 ... 20 mA; Intrinsically safe	4-Channel Analog Input; 0/4 ... 20 mA; NAMUR NE43; Intrinsically safe
Item No.	750-485	750-486
Order Text	4AI; 4-20mA; Ex i	4AI; 0/4-20mA; NE43; Ex i

5.9


Technical Data	2-Channel Analog Input; 4 ... 20 mA;	4-Channel Analog Input; 0/4 ... 20 mA; NAMUR NE43;
Number of analog inputs	2	4
Signal type	4 ... 20 mA	0 ... 20 mA; 4 ... 20 mA; 3.6 ... 21 mA
Signal characteristic	Single-ended	Single-ended
Input resistance	< 100 Ω	< 200 Ω
Resolution	12 bits	12 bits + sign bit
Conversion time	< 2 ms	< 10 ms
Measuring error (max.) at 25 °C	±0.2 % of the upper-range value	±0.1 % of the upper-range value
Temperature error (max.)	±0.01 %/K of the upper-range value	±0.01 %/K of the upper-range value
Supply voltage (field)	24 VDC (Ex i power supply: U_o = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)	24 VDC (Ex i power supply: U_o = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	11 mA	19 mA
Current consumption – system supply (5 V)	31 mA	45 mA
Transmitter supply	U_v = 16 V at 20 mA	U_v = 15 V at 20 mA
Data width	2 x 16-bit data; 2 x 8-bit control/status (optional)	4 x 16-bit data; 4 x 8-bit control/status (optional)
Isolation	U_m = 375 V system/supply	U_m = 375 V system/supply
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	24 x 67.8 x 100 mm	24 x 67.8 x 100 mm
Explosion Protection		
Safety-relevant data (circuit)	U_o = 27.3 V; I_o = 90 mA; P_o = 0.61 mW; Linear characteristic curve	U_o = 27.3 V; I_o = 98.4 mA; P_o = 0.672 mW; Linear characteristic curve
Reactances Ex ia IIC	L_o = 5 mH; C_o = 88 nF	L_o = 970 µH; C_o = 88 nF
Reactances Ex ia IIB	L_o = 18 mH; C_o = 680 nF	L_o = 13 mH; C_o = 683 nF
Reactances Ex ia IIA	L_o = 40 mH; C_o = 2.2 µF	L_o = 22 mH; C_o = 2.28 µF
Reactances Ex ia I	L_o = 100 mH; C_o = 3.5 µF	L_o = 31 mH; C_o = 3.6 µF
Reactances	Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)	Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)
Ex guideline	EN IEC 60079-0, -7, -11	EN IEC 60079-0, -7, -11
Approvals	CE; ; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO	CE; ; ATEX/IECEx
Marking	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I
Data sheet and further information, see:	wago.com/750-485	wago.com/750-486

- “ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"
- “ Approvals and corresponding ratings, see page 520 or www.wago.com

Analog Input; 4 ... 20 mA HART; Ex i



Figure: 750-484

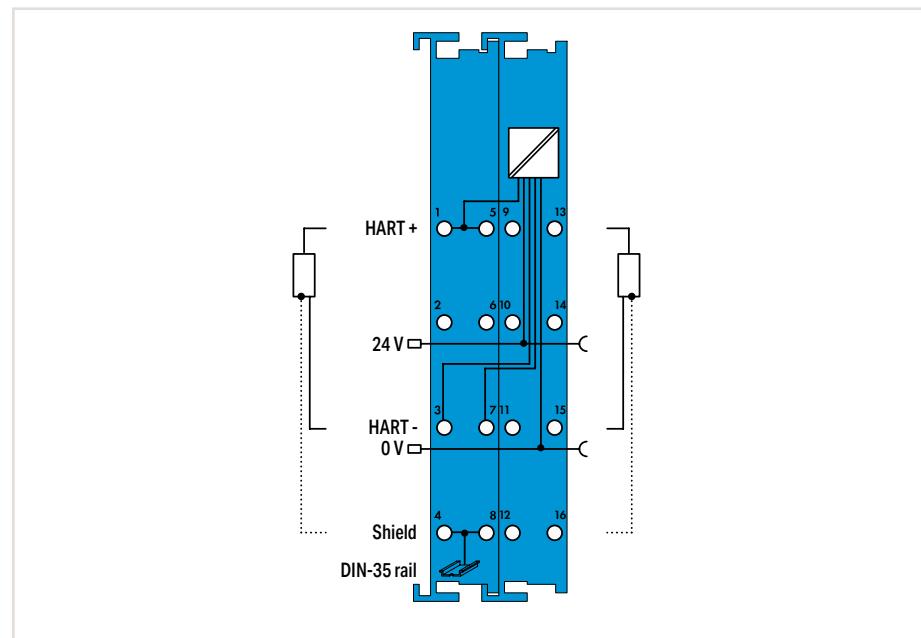

Item Description	2-Channel Analog Input; 4 ... 20 mA HART; Intrinsically safe	2-Channel Analog Input; 4 ... 20 mA HART; NAMUR NE43; Intrinsically safe
Item No.	750-484	750-484/000-001
Order Text	2AI; 4-20 mA HART; Ex i	2AI 4-20 mA HART NAMUR NE43 Ex i


Technical Data	
Number of analog inputs	2
Signal type	4 ... 20 mA
Signal characteristic	Single-ended
Resolution	12 bits
Conversion time	10 ms
Measuring error (max.) at 25 °C	0.2 % of the upper-range value
Temperature error (max.)	±0.01 %/K of the upper-range value
Supply voltage (field)	24 VDC (Ex i power supply: $U_0 = \text{max. } 27.3 \text{ V}$; via power jumper contacts (power supply via blade contact; transmission via spring contact))
Current consumption, field supply (module with no external load)	26 mA
Current consumption – system supply (5 V)	25 mA
Transmitter supply	$U_V = 16.5 \text{ V}$ at 20 mA
Data width	2 x 2-byte data; 2 x 2-byte data + 2n x 4-byte data ($n = \text{number of dynamic variables}$); 2 x 2-byte data + 6-byte mailbox
Isolation	$U_m = 375 \text{ V}$ system/supply
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 67.8 x 100 mm
Explosion Protection	
Safety-relevant data (circuit)	$U_0 = 27.3 \text{ V}$; $I_0 = 92.7 \text{ mA}$; $P_0 = 630 \text{ mW}$; Linear characteristic curve
Reactances Ex ia IIC	$L_o = 1.5 \text{ mH}$; $C_o = 87 \text{ nF}$
Reactances Ex ia IIB	$L_o = 15 \text{ mH}$; $C_o = 670 \text{ nF}$
Reactances Ex ia IIA	$L_o = 38 \text{ mH}$; $C_o = 2.2 \mu\text{F}$
Reactances Ex ia I	$L_o = 36 \text{ mH}$; $C_o = 3.49 \mu\text{F}$
Reactances	Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)
Ex guideline	EN IEC 60079-0, -7, -11
Approvals	INMETRO
Marking	II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIC I (M1) [Ex ia Ma] I
Data sheet and further information, see:	wago.com/750-484
	wago.com/750-484/000-001

In addition to analog signal processing, this module offers optional HART communication for parameterizing or recording dynamic variables.

Analog Input; for Resistance Sensors or Thermocouples; Ex i



Figure: 750-481/003-000

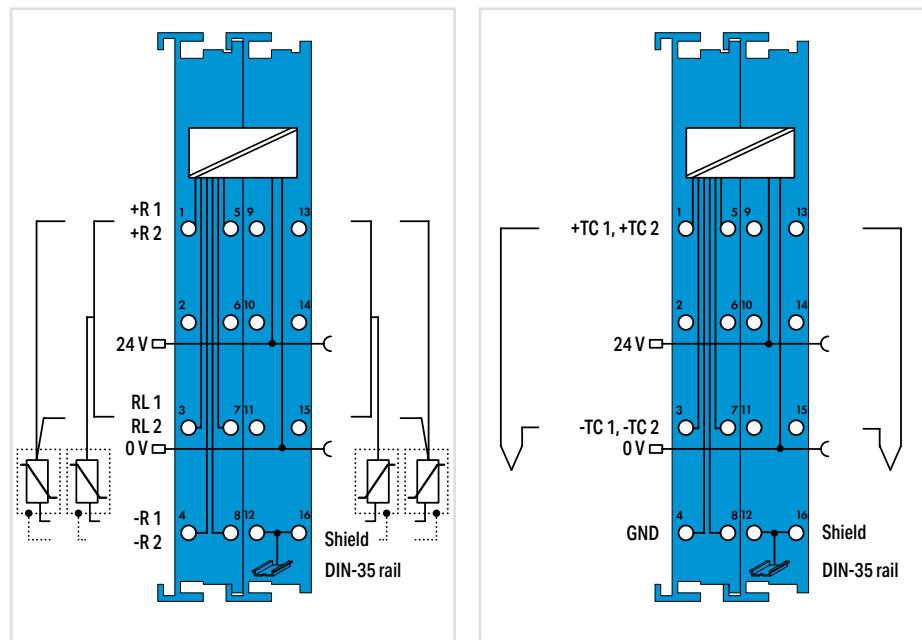

Item Description

2-Channel Analog Input; Resistance measurement; Intrinsically safe

Item No.

750-481/003-000

Order Text

2AI; RTD; Ex i

2-Channel Analog Input; Thermocouple; Intrinsically safe

750-487/003-000

2AI; TC; Ex i

5.9

Technical Data

Number of analog inputs

2

Resistance thermometers: Pt100; Pt200; Pt500;
Pt1000; Ni100; Ni120; Ni1000;
Resistors: 1.2 kΩ; 5 kΩ;
Potentiometer setting: 0 ... 100 %

Sensor connection

2-wire; 3-wire

Temperature range

-200 ... +850 °C (Pt); -60 ... +250 °C (Ni);
-80 ... +320 °C (Ni 120)

Resolution

0.1 °C; 0.1 Ω; 0.0049 %

Conversion time

150 ... 500 ms (per channel)

Measuring error (max.) at 25 °C

±0.2 % of the upper-range value

Temperature error (max.)

±0.01 %/K of the upper-range value

Cold junction compensation

±0.2 K/K of the upper-range value (type K)

Supply voltage (field)

Integrated or external

Current consumption, field supply (module with no external load)

12 mA

Current consumption – system supply (5 V)

25 mA

Data width

2 x 16-bit data; 2 x 8-bit control/status (optional)

Isolation

$U_m = 375$ V system/supply

Surrounding air temperature (operation)

0 ... +55 °C

Dimensions W x H x D

24 x 67.8 x 100 mm

Explosion Protection

$U_o = 7.2$ V; $I_o = 5.8$ mA; $P_o = 10.5$ mW;
Linear characteristic curve

Safety-relevant data (circuit)

$L_o = 0.9$ H; $C_o = 13.5$ µF

Reactances Ex ia IIC

$L_o = 1$ H; $C_o = 240$ µF

Reactances Ex ia IIB

$L_o = 1$ H; $C_o = 1000$ µF

Reactances Ex ia IIA

$L_o = 1$ H; $C_o = 1000$ µF

Reactances Ex ia I

Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)

Reactances

$EN\ IEC\ 60079-0, -7, -11$

Ex guideline

CE; Marine; OrdLoc/HazLoc/AEx;

Approvals

ATEX/IECEx; INMETRO

Marking

ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc
II (1) D [Ex ia Da] IIIC
I (M1) [Ex ia Ma] I

Data sheet and further information, see:

wago.com/750-481/003-000

2-wire

-100 ... +1,800 °C

0.1°C or 0.01 mV for voltage measurement

≤ 320 ms (both channels)

Thermocouples: Type B; E; J; K; L; N; R; S; T; U;

Voltage encoders: ±30 mV; ±60 mV; ±120 mV

24 VDC (Ex i power supply: U_o = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)

12 mA

25 mA

2 x 16-bit data; 2 x 8-bit control/status (optional)

$U_m = 375$ V system/supply

0 ... +55 °C

24 x 67.8 x 100 mm

$U_o = 14.4$ V; $I_o = 29.1$ mA; $P_o = 52.4$ mW;

Linear characteristic curve

$L_o = 52$ mH; $C_o = 650$ nF

$L_o = 100$ mH; $C_o = 4.0$ µF

$L_o = 300$ mH; $C_o = 15.8$ µF

$L_o = 400$ mH; $C_o = 17.9$ µF

Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)

$EN\ IEC\ 60079-0, -7, -11$

CE; Marine; OrdLoc/HazLoc/AEx;

ATEX/IECEx; INMETRO

ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc

II (1) D [Ex ia Da] IIIC


I (M1) [Ex ia Ma] I

wago.com/750-487/003-000

Analog Output; 0 ... 20 mA or 4 ... 20 mA; Ex i



Figure: 750-585

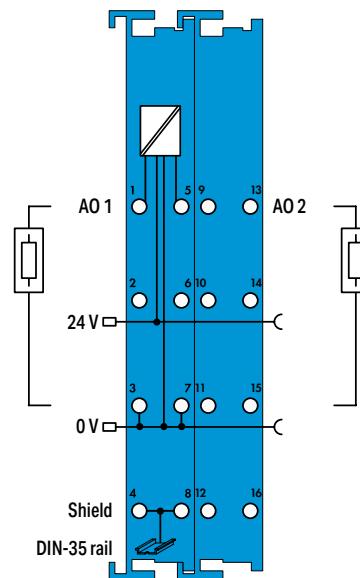


Item Description	2-Channel Analog Output; 0 ... 20 mA; Intrinsically safe	
Item No.	750-585	750-586
Order Text	2AO; 0-20mA; Ex i	
Technical Data		
Number of analog outputs	2	4 ... 20 mA
Signal type	0 ... 20 mA	4 ... 20 mA
Signal characteristic	Single-ended	
Load impedance	< 500 Ω	
Resolution	12 bits	
Conversion time	< 2 ms	
Output error (max.) at 25 °C	±0.2 % of the upper-range value	
Temperature error (max.)	±0.01 %/K of the upper-range value	
Supply voltage (field)	24 VDC (Ex i power supply: $U_0 = \text{max. } 27.3 \text{ V}$; via power jumper contacts (power supply via blade contact; transmission via spring contact))	
Current consumption, field supply (module with no external load)	19 mA	
Current consumption – system supply (5 V)	21 mA	
Data width	2 x 16-bit data	
Isolation	$U_m = 375 \text{ V}$ system/supply	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	24 x 67.8 x 100 mm	
Explosion Protection		
Safety-relevant data (circuit)	$U_o = 27.3 \text{ V}; I_o = 57.5 \text{ mA}; P_o = 392 \text{ mW}$; Linear characteristic curve $L_o = 11 \text{ mH}; C_o = 88 \text{ nF}$ $L_o = 56 \text{ mH}; C_o = 680 \text{ nF}$ $L_o = 90 \text{ mH}; C_o = 2.2 \mu\text{F}$ $L_o = 110 \text{ mH}; C_o = 3.5 \mu\text{F}$	
Reactances Ex ia IIC	Reactances without accounting for the concurrence of capacitance (C_o) and inductance (L_o)	
Reactances Ex ia IIB	EN IEC 60079-0, -7, -11	
Reactances Ex ia IIA	CE, KC, Marine; OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO	
Reactances Ex ia I	ATEX/IECEx: II 3 (1) G [Ex ec] ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I	
Reactances		
Ex guideline		
Approvals		
Marking		
Data sheet and further information, see:	wago.com/750-585	wago.com/750-586

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 520, 521 or www.wago.com

Up/Down Counter; Ex i

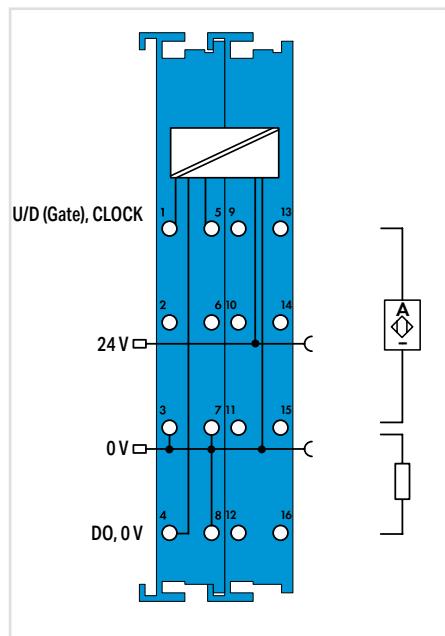

Item Description	Up/Down Counter; Intrinsically safe
Item No.	750-633
Order Text	Up/Down Counter; Ex i
Technical Data	
Number of counters	1
Number of outputs	1
Sensor supply UV	8.2 VDC
Input filter	10 µs
Switching frequency	20 Hz ... 50 kHz
Counter depth	32 bits
Output voltage	24 VDC
Supply voltage (field)	24 VDC (Ex i power supply: U_o = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	31 mA
Current consumption – system supply (5 V)	25 mA
Data width	1 x 32-bit data, 1 x 8-bit status/diagnostics
Isolation	U_m = 375 V system/supply
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	24 x 67.8 x 100 mm
Explosion Protection	
Safety data – input	U_o = 12 V; I_o = 13.5 mA; P_o = 40.5 mW; Linear characteristic curve
Input reactances Ex ia IIC	L_o = 100 mH; C_o = 1.4 µF
Input reactances Ex ia IIB	L_o = 100 mH; C_o = 9 µF
Input reactances Ex ia IIA	L_o = 100 mH; C_o = 36 µF
Input reactances Ex ia I	L_o = 100 mH; C_o = 38 µF
Safety data – output	U_o = 27.3 V; I_o = 103 mA; P_o = 703 mW; Linear characteristic curve
Output reactances Ex ia IIIC	L_o = 0.5 mH; C_o = 88 nF
Output reactances Ex ia IIB	L_o = 10 mH; C_o = 683 nF
Output reactances Ex ia IIA	L_o = 18 mH; C_o = 2.2 µF
Output reactances Ex ia I	L_o = 26 mH; C_o = 3.6 µF
Ex guideline	EN IEC 60079-0, -7, -11
Approvals	CE; IECEx Marine; IECEx OrdLoc/HazLoc/AEx; ATEX/IECEx; INMETRO
Marking	ATEX/IECEx: II 3 (1) G [Ex ec ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I
Data sheet and further information, see:	wago.com/750-633

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 522 or www.wago.com


Supply/Segment Modules

Housing design (750/753 Series)

Dimensions W x H x D	12 x 69.8 x 100 mm
Height from upper-edge of DIN-rail	62.6 mm
Connection technology	CAGE CLAMP®
Conductor cross section	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	750 Series: 8 ... 9 mm / 0.33 inch 753 Series: 9 ... 10 mm / 0.37 inch

Housing design (750 Series), with Push-in CAGE CLAMP® connections (up to 16 connection points)

Dimensions W x H x D	12 x 69 x 100 mm
Height from upper-edge of DIN-rail	61.8 mm
Connection technology	Push-in CAGE CLAMP®
Conductor cross section	Solid: 0.08 ... 2.5 mm ² / 28 ... 16 AWG Fine-stranded: 0.25 ... 1.5 mm ² / 22 ... 16 AWG
Strip length	8 ... 9 mm / 0.33 inch

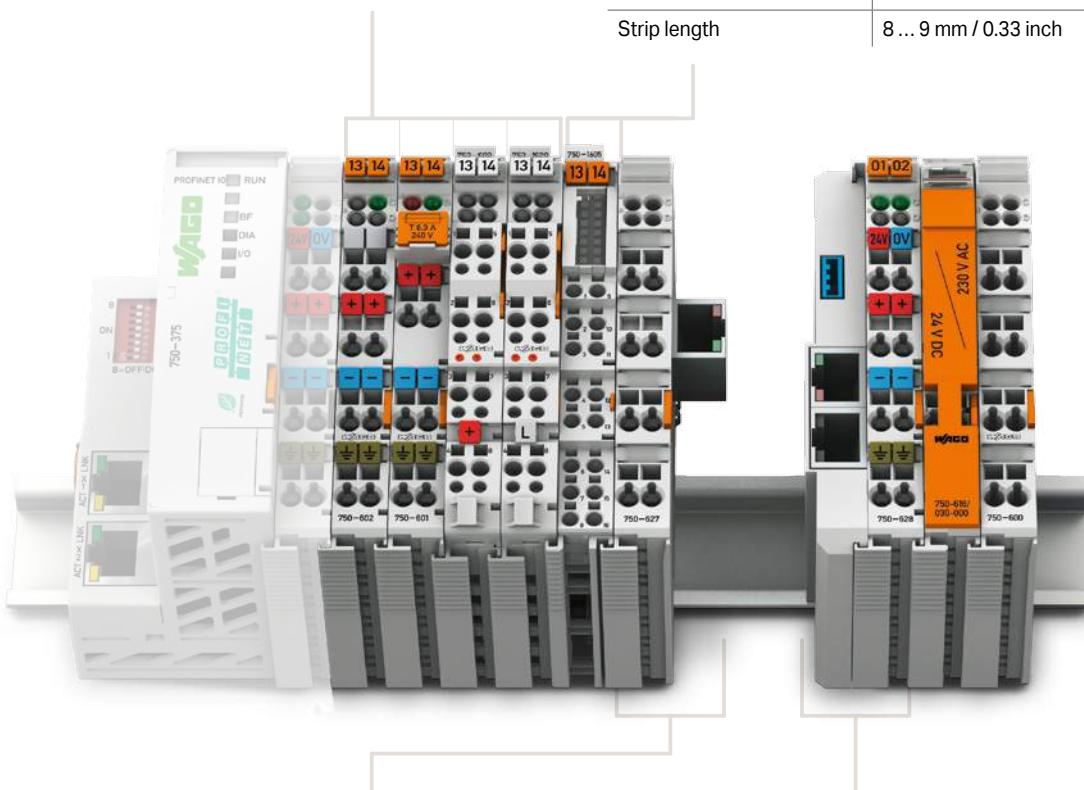

Specialty housing (end module for bus extension)

Dimensions W x H x D	24 x 69.8 x 100
Height from upper-edge of DIN-rail	62.6 mm

Specialty housing (coupler module for bus extension)

Dimensions W x H x D	24 x 69.8 x 100
Height from upper-edge of DIN-rail	62.6 mm



I/O System –
750 XTR Series



I/O System – 750 and 753 Series, Supply/Segment Modules

Contents

Function	Description	Item Number			Page
		Standard	Extended Temperature	Pluggable	
Power Supply 24 VDC	Power Supply; 24 VDC	750-602*	750-602/025-000	753-602	324
	Power Supply; 24 VDC/5 ... 15 VDC	750-623			324
	Power Supply; 24 VDC; Fuse holder	750-601*			325
	Power Supply; 24 VDC; Fuse holder; Diagnostics	750-610*			325
24 VDC with Bus Power Supply	System Power Supply; 24 VDC	750-613*			326
230 VAC/DC	Power Supply; 0 ... 230 VAC/DC	750-612*		753-612	327
24 VAC	Power Supply; 24 VAC; Fuse holder	750-617			328
120 VAC	Power Supply; 120 VAC; Fuse holder	750-615			328
230 VAC	Power Supply; 230 VAC; Fuse holder	750-609			329
DALI Multi-Master DC/DC Converter	Power Supply; 230 VAC; Fuse holder; Diagnostics	750-611			329
	DALI Multi-Master DC/DC Converter			753-620	330
Potential Distribution	Potential Distribution	750-614*		753-614	331
	Potential Distribution; 8x 24 V	750-603		753-603	332
	Potential Distribution; 8x 0 V	750-604		753-604	332
	Potential Distribution; 16x 24 V	750-1605*			333
	Potential Distribution; 16x 0 V	750-1606*			333
	Potential Distribution; 8x 24 V/8x 0 V	750-1607			333
Filter Modules	Field Supply Filter (Surge); 24 VDC; Higher isolation	750-624/020-000*			334
	Field Supply Filter (Surge); 24 VDC; Higher isolation; Without power jumper contacts	750-624/020-001*			334
	Field Supply Filter (Surge); 24 VDC; Higher isolation; Ground fault diagnostics	750-624/020-002			334
	Field Supply Filter (Surge); 24 VDC	750-624			335
	Field Supply Filter (Surge); 24 VDC; Without power jumper contacts	750-624/000-001			335
	Supply Filter; 24 VDC; Higher isolation	750-626/020-000*	750-626/025-001		336
	Supply Filter; 24 VDC; Higher isolation; Ground fault diagnostics	750-626/020-002			336
	Supply Filter; 24 VDC	750-626	750-626/025-000		337
Local Bus Extension	Bus Extension End Module	750-627			338
	Bus Extension Coupler Module	750-628			338
Spacer Modules	Binary Spacer Module	750-622			339
	Spacer Module; Active			753-1629	340
	Spacer Module; Active; Without power jumper contacts			753-1629/000-001	340
	Spacer Module; Passive			753-629/020-000	340
Distance Modules	Distance Module	750-616*			341
	Distance Module; 24 VDC/230 VAC	750-616/030-000			341
	Distance Module	750-621			341
End Module	End Module	750-600*	750-600/025-000		342
Ex i		See Section 5.9			
*This module is also available as a variant of the 750 XTR Series.		See Section 6			



Power Supply; 24 VDC



Figure: 750-602



Figure: 750-623

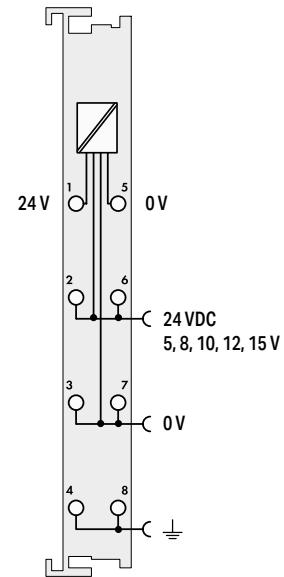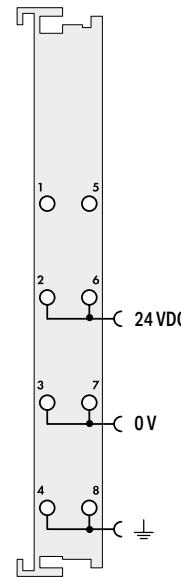

Item Description	Power Supply; 24 VDC			Power Supply; 24 VDC/5 ... 15 VDC
Version	Standard	Extended temperature	Pluggable (delivery without connector)	Standard
Item No.	750-602	750-602/025-000	753-602	750-623
Order Text	Power Supply; 24 VDC	Power Supply; 24 VDC; T	Power Supply; 24 VDC	Power Supply; 24/5–15 VDC

5.10

Technical Data

Pluggable connector	•		
Supply voltage (system)	5 VDC; via data contacts		
Supply voltage (field)	24 VDC (−25 ... +30 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)		
Total current (system supply)	10 A		
Current carrying capacity (power jumper contacts)	0 ... +55 °C	−20 ... +60 °C	0 ... +55 °C
Surrounding air temperature (operation)	0 ... +55 °C		
Dimensions W x H x D	12 x 69.8 x 100 mm		
Approvals	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx		
Data sheet and further information, see:	wago.com/750-602	wago.com/ 753-602	wago.com/750-623

Accessories

	Item No.
Pluggable connector	753-110
Coding keys	753-150

This I/O module provides the applied supply voltage to the field devices connected to downstream I/O modules.

This I/O module converts the applied supply voltage to a value selected via DIP switch and provides it to the field devices connected to the downstream I/O modules.


“ Mini-WSB marker card and mounting accessories,
see Section “Accessories and Tools”

“ Approvals and corresponding ratings,
see page 523 or www.wago.com

Power Supply; 24 VDC



Figure: 750-601

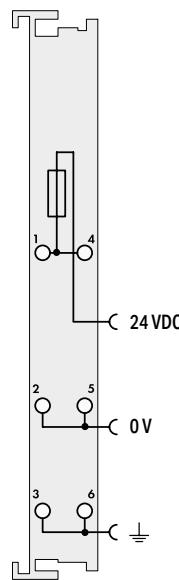


Item Description	Power Supply; 24 VDC; Fuse holder	
Version	Standard	Diagnostics
Item No.	750-601	750-610
Order Text	Power Supply; 24 VDC; Fuse	Power Supply; 24 VDC; Fuse; Diagn
Technical Data		
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)	
Current carrying capacity (power jumper contacts)	6.3 A	
Fuse	5 x 20; T max. 6.3 A (not included)	
Diagnostics	Supply voltage, field: Detection "on" at > 15 VDC; Detection "off" at < 5 VDC	
Current consumption – system supply (5 V)	5 mA	
Data width (internal)	2 bits (1-bit current monitoring; 1-bit fuse fault)	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE; UL; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-601	wago.com/750-610

This I/O module provides the applied supply voltage, protected by fuse, to the field devices connected to downstream I/O modules. A blown fuse is indicated by an LED.

This I/O module provides the applied supply voltage, protected by fuse, to the field devices connected to downstream I/O modules. A blown fuse is indicated by an LED. The fuse status can also be queried from the fieldbus coupler.

System Power Supply; 24 VDC

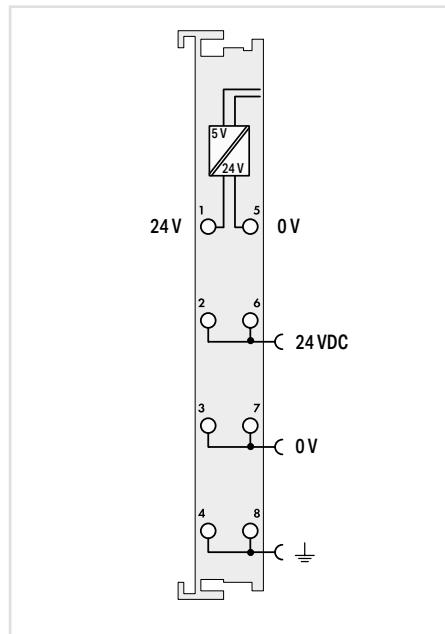

Item Description	System Power Supply; 24 VDC
Version	Standard
Item No.	750-613
Order Text	System Power Supply; 24 VDC
Technical Data	
Supply voltage, system (24 V)	24 VDC (-25 ... +30 %); power supply and transmission via CAGE CLAMP® connection
Input current (typ.) at nominal load (24 V)	500 mA
Power supply efficiency (typ.) at nominal load (24 V)	90 %
Total current (system supply)	2000 mA
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)
Current carrying capacity (power jumper contacts)	10 A
Isolation	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	
Data sheet and further information, see:	wago.com/750-613

This I/O module provides the applied supply voltage to the field devices connected to downstream I/O modules. It also serves as an additional system supply for large nodes, covering the power demands of the I/O modules themselves.

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 523 or www.wago.com


Power Supply; 0 ... 230 VAC/DC



Figure: 750-612



Figure: 753-612

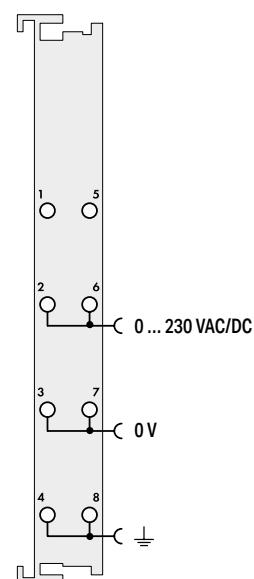



Item Description	Power Supply; 0 ... 230 VAC/DC	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-612	753-612
Order Text	Power Supply; 0–230 VAC/VDC	Power Supply; 0–230 VAC/VDC
Technical Data		
Pluggable connector		
Supply voltage (field)	0 ... 230 VAC/DC (−15 ... +10 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)	
Current carrying capacity (power jumper contacts)	10 A	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals		
Data sheet and further information, see:	wago.com/750-612	wago.com/753-612
Accessories	Item No.	
Pluggable connector	753-110	
Coding keys	753-150	

This I/O module provides the applied supply voltage to the field devices connected to downstream I/O modules.

Power Supply; 24 VAC or 120 VAC



Figure: 750-617

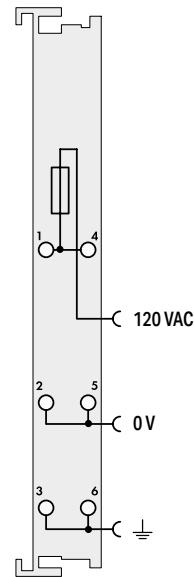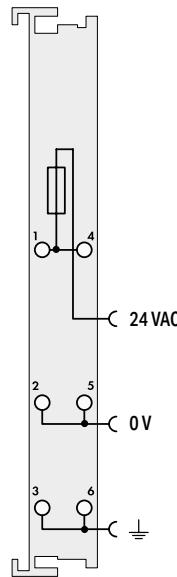

Item Description	Power Supply; 24 VAC; Fuse holder	Power Supply; 120 VAC; Fuse holder
Version	Standard	Standard
Item No.	750-617	750-615
Order Text	Power Supply; 24 VAC; Fuse	Power Supply; 120 VAC; Fuse
Technical Data		
Supply voltage (field)	24 VAC; via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)	120 VAC; via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)
Current carrying capacity (power jumper contacts)	6.3 A	6.3 A
Fuse	5 x 20; T max. 6.3 A (not included)	5 x 20; T max. 6.3 A (not included)
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	12 x 69.8 x 100 mm
Approvals	CE; KC; OrdLoc	CE; KC; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-617	wago.com/750-615

This I/O module provides the applied supply voltage, protected by fuse, to the field devices connected to downstream I/O modules. A blown fuse is indicated by an LED.

This I/O module provides the applied supply voltage, protected by fuse, to the field devices connected to downstream I/O modules. A blown fuse is indicated by an LED.


„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 523 or www.wago.com

Power Supply; 230 VAC



Figure: 750-609

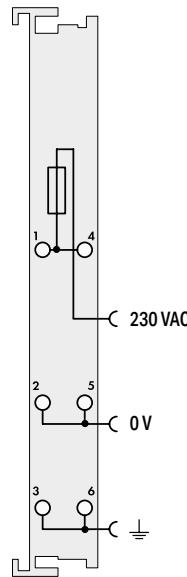


Item Description	Power Supply; 230 VAC; Fuse holder	
Version	Standard	Diagnostics
Item No.	750-609	750-611
Order Text	Power Supply; 230 VAC; Fuse	Power Supply; 230 VAC; Fuse; Diagn
Technical Data		
Supply voltage (field)	230 VAC (-15 ... +10 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)	
Current carrying capacity (power jumper contacts)	6.3 A	
Fuse	5 x 20; T max. 6.3 A (not included)	
Diagnostics	Supply voltage, field: Detection "on" at > 164 VAC; Detection "off" at < 40 VAC	
Current consumption – system supply (5 V)	5 mA	
Data width (internal)	2 bits (1-bit current monitoring; 1-bit fuse fault)	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE; UL; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-609	wago.com/750-611

This I/O module provides the applied supply voltage, protected by fuse, to the field devices connected to downstream I/O modules. A blown fuse is indicated by an LED.

This I/O module provides the applied supply voltage, protected by fuse, to the field devices connected to downstream I/O modules. A blown fuse is indicated by an LED. The fuse status can also be queried from the fieldbus coupler.

DALI Multi-Master DC/DC Converter

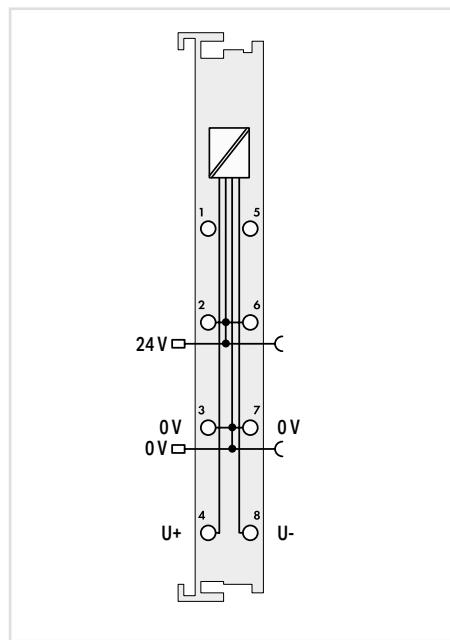

Item Description	DALI Multi-Master DC/DC Converter
Version	Pluggable (delivery without connector)
Item No.	753-620
Order Text	DALI Multi-Master DC/DC Converter
Technical Data	
Pluggable connector	●
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact); Supply voltage (DALI): 18 VDC; at +U and -U via CAGE CLAMP® connection
Current carrying capacity (power jumper contacts)	10 A
Total current (system supply)	200 mA; short-circuit-protected
Test voltage (input/output)	1.5 kV
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; KC; Marine; UL OrdLoc
Data sheet and further information, see:	wago.com/753-620
Accessories	
Pluggable connector	Item No.
Coding keys	753-110
	753-150

This I/O module powers the DALI Multi-Master (753-647). It uses the field supply, which is connected via the power jumper contacts. Cable bridges connect the module to the DALI Multi-Master.

„ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

„ Approvals and corresponding ratings, see page 523 or www.wago.com


Potential Distribution



Figure: 750-614



Figure: 753-614

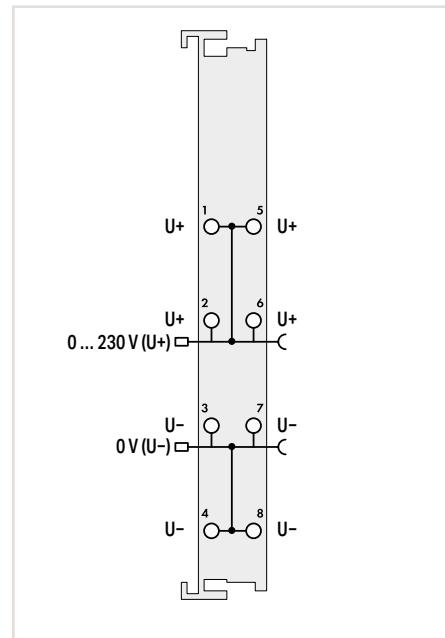

Item Description	Potential Distribution	
Version	Standard	Pluggable (delivery without connector)
Item No.	750-614	753-614
Order Text	Potential Distribution	
Technical Data		
Pluggable connector	●	
Supply voltage (field)	0 ... 230 VAC/DC; via power jumper contacts (power supply via blade contact; transmission via spring contact)	
Current carrying capacity (power jumper contacts)	10 A	
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE; UL; Marine; OrdLoc/HazLoc; ATEX/IECEx	
Data sheet and further information, see:	wago.com/750-614 wago.com/753-614	
Accessories		
Pluggable connector	753-110	
Coding keys	753-150	



Potential Distribution



Figure: 750-603



Figure: 750-1605

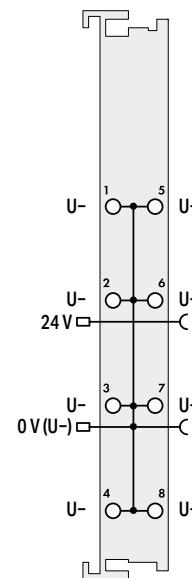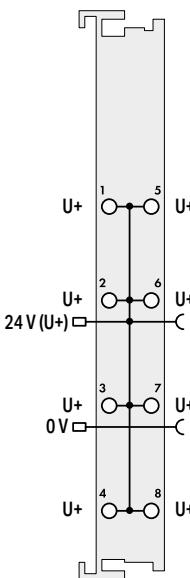

Item Description
750-603
750-1605
Potential Distribution; 8*24V

Potential Distribution; 8x 24 V	
Standard	Pluggable (delivery without connector)
750-603	753-603
Potential Distribution; 8*24V	Potential Distribution; 8*24V

Potential Distribution; 8x 0 V	
Standard	Pluggable (delivery without connector)
750-604	753-604
Potential Distribution; 8*0V	Potential Distribution; 8*0V

Technical Data

Pluggable connector

Supply voltage (field)

24 VDC (−25 ... +30 %); via power jumper contacts
(power supply via blade contact; transmission via spring contact)

24 VDC (−25 ... +30 %); via power jumper contacts
(power supply via blade contact; transmission via spring contact)

Current carrying capacity (power jumper contacts)

10 A

10 A

Surrounding air temperature (operation)

0 ... +55 °C

0 ... +55 °C

Dimensions W x H x D

12 x 69.8 x 100 mm

12 x 69.8 x 100 mm

Approvals

CE;

CE;

Data sheet and further information, see:

wago.com/750-603wago.com/753-603wago.com/750-604wago.com/753-604

Accessories

Pluggable connector

Item No.

Coding keys

753-110




Item No.

753-110

753-150

“ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

“ Approvals and corresponding ratings,
see page 523 or www.wago.com

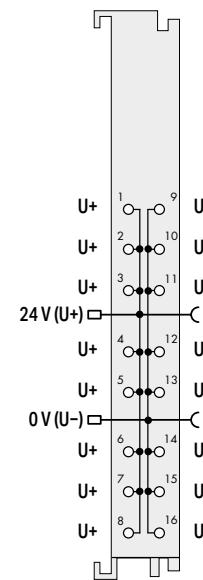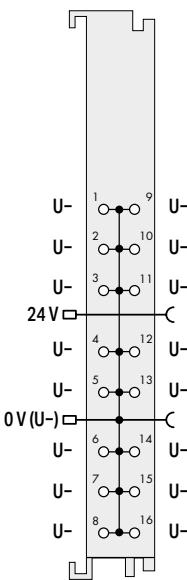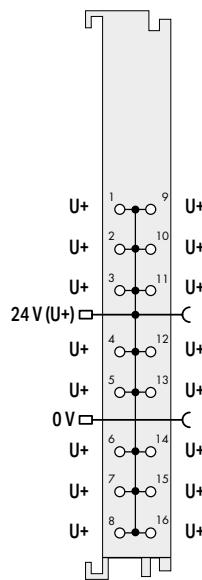

Potential Distribution; 16x 24 V

Standard with 16 connectors

750-1605

Potential Distribution; 16*24V

Potential Distribution; 16x 0 V

Standard with 16 connectors

750-1606

Potential Distribution; 16*0V

Potential Distribution;
8x 24 V/8x 0 V

Standard with 16 connectors

750-1607

Potential Distribution; 8*24V/8*0V

24 VDC (-25 ... +30 %); via power jumper contacts
(power supply via blade contact; transmission via
spring contact)

10 A

0 ... +55 °C

12 x 69 x 100 mm

CE; Marine; OrdLoc/HazLoc;
 ATEX/IECExwago.com/750-160524 VDC (-25 ... +30 %); via power jumper contacts
(power supply via blade contact; transmission via
spring contact)

10 A

0 ... +55 °C

12 x 69 x 100 mm

CE; Marine; OrdLoc/HazLoc;
 ATEX/IECExwago.com/750-160624 VDC (-25 ... +30 %); via power jumper contacts
(power supply via blade contact; transmission via
spring contact)

10 A

0 ... +55 °C

12 x 69 x 100 mm

CE; Marine; OrdLoc/HazLoc;
 ATEX/IECExwago.com/750-1607


Field Supply Filter (Surge)



Figure: 750-624/020-000



Figure: 750-624/020-001

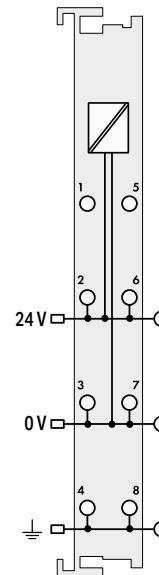


Item Description	Field Supply Filter (Surge); 24 VDC				
Version	Standard	Higher isolation	Higher isolation; Ground fault diagnostics		
Item No.	750-624	750-624/020-000	750-624/020-002		
Order Text	Field Supply Filter; 24 VDC	Field Supply Filter; 24 VDC; HI	Field Supply Filter; 24 VDC HI; GF		
Technical Data					
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)				
Current carrying capacity (power jumper contacts)	10 A				
Use	Marine-certified operation in conjunction with the Ex i supply module and the use of 750 Series PROFIsafe Modules	Marine-certified operation in conjunction with 750 Series I/O Modules			
Ground diagnostics	Response values:				
Pre-alarm	50 kΩ (±15 %)				
Main alarm	25 kΩ (±15 %); typ. 25 ... 30 %;				
Hysteresis	≤5 s (typ. 2.5 s);				
Response time	> 10 MΩ (test inactive), > 90 kΩ (test active)				
Internal resistance DC (test circuit)	≤180 µA ($R_L = 0 \Omega$)				
Test current	≤2 µF				
Permissible system leakage capacitance	0 ... +55 °C				
Surrounding air temperature (operation)	12 x 69.8 x 100 mm				
Dimensions W x H x D	CE; Marine; OrdLoc/HazLoc; ATEX/IECEx				
Approvals					
Data sheet and further information, see:	wago.com/750-624	wago.com/750-624/020-000	wago.com/750-624/020-002		

*pending

Use in systems with isolation monitoring requires the high isolation variants.

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 523 or www.wago.com

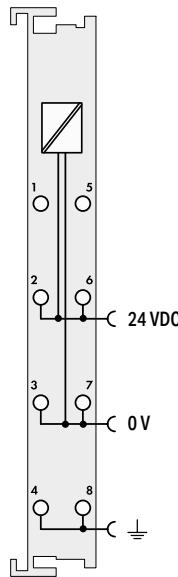**Field Supply Filter (Surge); 24 VDC**

Without power jumper contacts	Higher isolation; Without power jumper contacts
-------------------------------	---

750-624/000-001	750-624/020-001
------------------------	------------------------

Field Supply Filter; 24 VDC; NC	Field Supply Filter; 24 VDC; HI; NC
---------------------------------	-------------------------------------

24 VDC (-25 ... +30 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)

10 A

5.10

Marine-certified operation in conjunction with the Ex i supply module and the use of 750 Series PROFIsafe Modules

Marine-certified operation in conjunction with 750 Series I/O Modules

0 ... +55 °C

12 x 69.8 x 100 mm

CE; Marine; OrdLoc/HazLoc; ATEX/IECEx

wago.com/750-624/000-001


wago.com/750-624/020-001

Use in systems with isolation monitoring requires the high isolation variants.

Supply Filter



Figure: 750-626/020-000

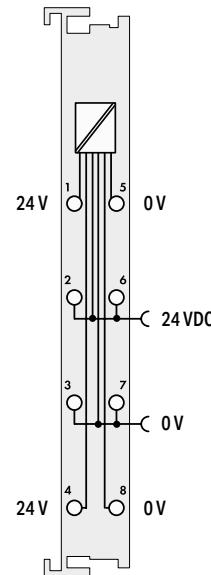

Item Description	Supply Filter; 24 VDC		
Version	Higher isolation	Higher isolation; Extended temperature	Standard
Item No.	750-626/020-000	750-626/025-001	750-626
Order Text	Supply Filter; 24 VDC; HI	Supply Filter; 24 VDC; HI; T	Supply Filter; 24 VDC


Technical Data

Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)			
Supply voltage, system (24 V)	24 VDC (-25 ... +30 %); power supply and transmission via CAGE CLAMP® connection			
Current via system voltage (max.)	1.5 A			
Current carrying capacity (power jumper contacts)	10 A			
Use	Marine-certified operation in conjunction with 750 Series Couplers and Controllers Marine-certified operation in conjunction with the Ex i supply module and the use of 750 Series PROFIsafe Modules			
Ground diagnostics				
Pre-alarm				
Main alarm				
Hysteresis				
Response time				
Internal resistance DC (test circuit)				
Test current				
Permissible system leakage capacitance				
Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C	0 ... +55 °C	-20 ... +60 °C
Dimensions W x H x D	12 x 69.8 x 100 mm			
Approvals	CE; UL Marine; UL OrdLoc/HazLoc; ATEX/IECEx			
Data sheet and further information, see:	wago.com/750-626/020-000			
	wago.com/750-626			

Use in systems with isolation monitoring requires the high isolation variants.

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 523 or www.wago.com

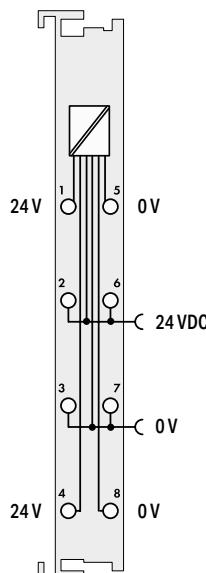

Supply Filter; 24 VDC

Higher isolation; Ground fault diagnostics

750-626/020-002

Supply Filter; 24 VDC HI; GF

24 VDC (-25 ... +30 %); via power jumper contacts
(power supply via CAGE CLAMP® connection;
transmission via spring contact)

24 VDC (-25 ... +30 %); power supply and trans-
mission via CAGE CLAMP® connection

1.5 A

10 A

5.10

Marine-certified operation in conjunction with
750 Series Couplers and Controllers

Response values:

50 kΩ (±15 %)

25 kΩ (±15 %);

typ. 25 ... 30 %;

≤5 s (typ. 2.5 s);

> 10 MΩ (test inactive), > 90 kΩ (test active)

≤ 180 µA ($R_F = 0 \Omega$)

≤ 2 µF

0 ... +55 °C

12 x 69.8 x 100 mm

CE; Marine; OrdLoc; ATEX/IECEx

wago.com/750-626/020-002

Use in systems with isolation monitoring requires
the high isolation variants.



End Module/Coupler Module for Bus Extension




Figure: 750-627



Figure: 750-628

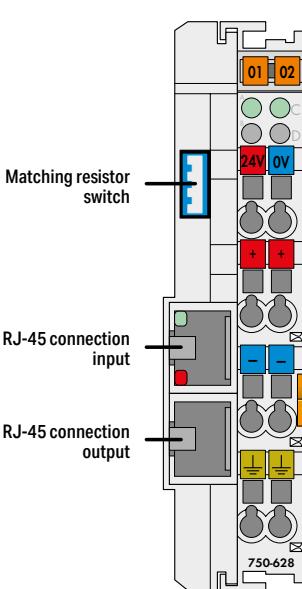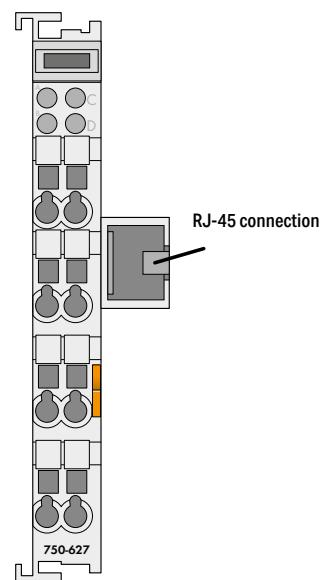


Item Description	Bus Extension End Module	Bus Extension Coupler Module
Version	Standard	Standard
Item No.	750-627	750-628
Order Text	Bus Extension End Module	Bus Extension Coupler Module
Technical Data		
Number of coupler modules	Up to 10	64 (within the system)
Number of I/O modules		2 x RJ-45 socket (input + output)
Connection technology (local bus)	1 x RJ-45 socket	5 m (10 m see manual); (end/coupler modules or coupler/coupler modules)
Distance (max.)	5 m (10 m see manual); (end/coupler modules or coupler/coupler modules)	24 VDC (-15 ... +20 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)
Supply voltage (field)		24 VDC (-15 ... +20 %); power supply and transmission via CAGE CLAMP® connection
Supply voltage, system (24 V)		150 mA
Current consumption – system supply (5 V)	70 mA	10 A
Current carrying capacity (power jumper contacts)		500 V system/field
Isolation	500 V system/field	0 ... +55 °C
Surrounding air temperature (operation)	0 ... +55 °C	0 ... +55 °C
Dimensions W x H x D	24 x 69.8 x 100 mm	24 x 69.8 x 100 mm
Approvals	CE; IEC; Marine; UL OrdLoc	CE; IEC; Marine; UL OrdLoc
Data sheet and further information, see:	wago.com/750-627	wago.com/750-628

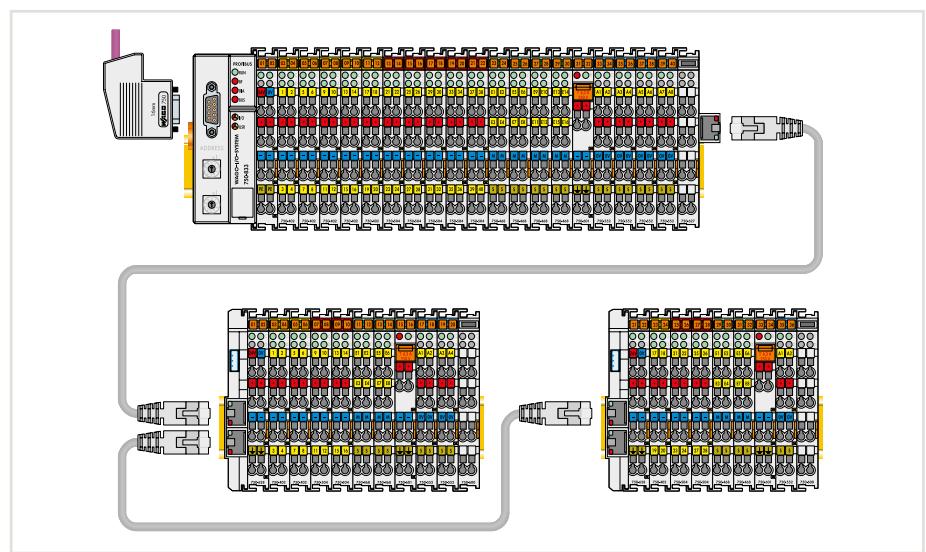

“ Mini-WSB marker card and mounting accessories, see Section “Accessories and Tools”

“ Approvals and corresponding ratings, see page 523 or www.wago.com

Binary Spacer Module

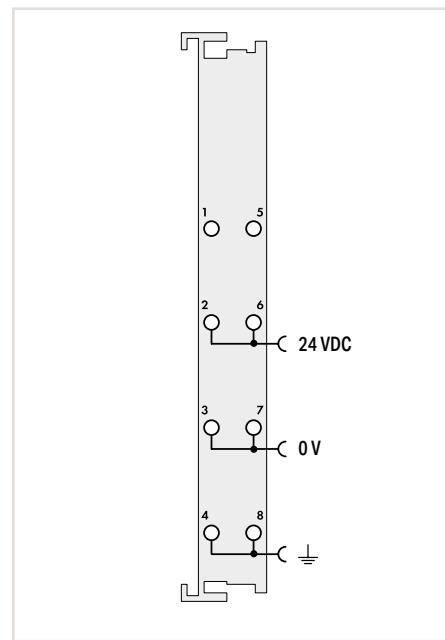


Item Description	Binary Spacer Module
Version	Standard
Item No.	750-622
Order Text	Binary Spacer Module
Technical Data	
Current consumption – system supply (5 V)	10 mA
Supply voltage (field)	24 VDC (–15 ... +20 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission via spring contact)
Current carrying capacity (power jumper contacts)	10 A
Data width (internal)	2; 4; 6 or 8 bits (adjustable via DIP switches)
Operating mode	Inputs/outputs (adjustable via DIP switches)
Isolation	500 V system/field
Surrounding air temperature (operation)	0 ... +55 °C
Dimensions W x H x D	12 x 69.8 x 100 mm
Approvals	CE; OrdLoc/HazLoc; ATEX/IECEx
Data sheet and further information, see:	wago.com/750-622

This binary spacer module reserves bit addresses in the process image of a fieldbus node.

Spacer Module



Figure: 753-1629

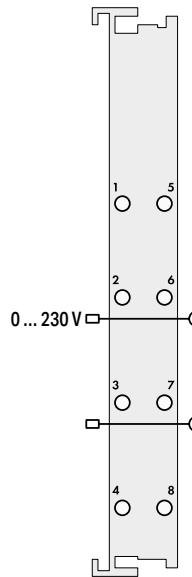

Item Description	Spacer Module		
Version	Active; Pluggable (delivery without connector)	Active; Without power jumper contacts; Pluggable (delivery without connector)	Passive; Pluggable (delivery without connector)
Item No.	753-1629	753-1629/000-001	753-629/020-000
Order Text	Spacer Module; Active	Spacer Module; Active; NC	Spacer Module; Passive

Technical Data

Supply voltage (field)	0 ... 230 VAC/DC; Field-side supply via power jumper contacts	0 ... 230 VAC/DC; Field-side supply via power jumper contacts
Surrounding air temperature (operation)	0 ... +55 °C	
Dimensions W x H x D	12 x 69.8 x 100 mm	
Approvals	CE, UL, CSA, OrdLoc	
Data sheet and further information, see:	wago.com/753-1629	wago.com/753-629

This active spacer module enables both hardware and software space reservation for standard function modules (digital input/output modules and analog input/output modules) in PROFIBUS/PROFINET networks (only in conjunction with 750-333, 750-375, 750-377).

This passive spacer module enables hardware space reservation for standard function modules (digital input/output modules and analog input/output modules).

“ Mini-WSB marker card and mounting accessories, see Section "Accessories and Tools"

“ Approvals and corresponding ratings, see page 523 or www.wago.com



Distance Module



Figure: 750-616



Figure: 750-616/030-000

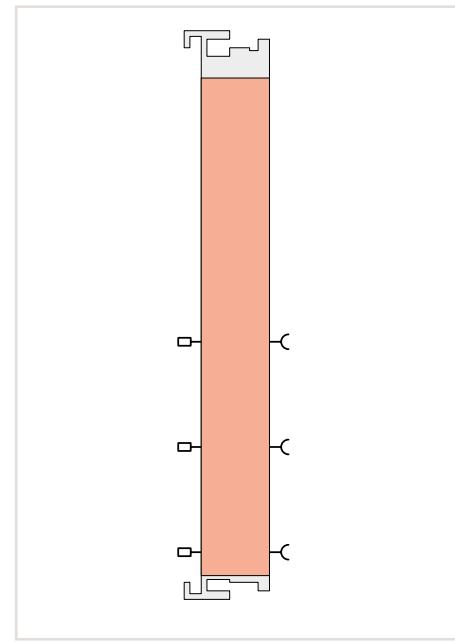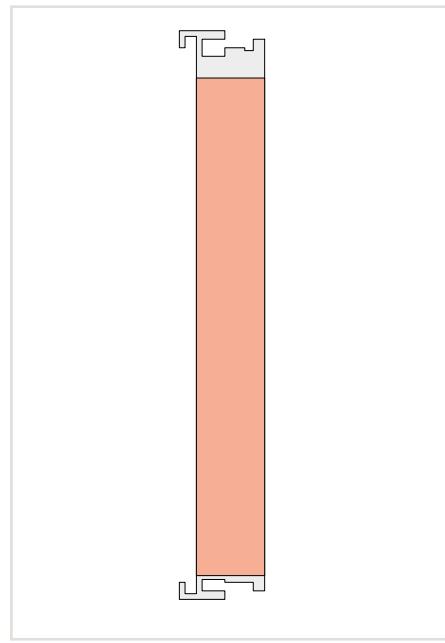

Item Description
Version
Item No.
Order Text

Distance Module	
Standard	Labeled
750-616	750-616/030-000
Distance Module	Distance Module

Distance Module
With power jumper contacts
750-621

Technical Data
Surrounding air temperature (operation)
Dimensions W x H x D
Approvals
Data sheet and further information, see:

Distance Module
Standard
750-616
Distance Module
Distance Module

Distance Module
With power jumper contacts
750-621
Distance Module
Distance Module

This distance module visually divides a fieldbus node into sections.

The 750-616 Distance Module has no power jumper contacts. The labeled version of the distance module is available under the item number 750-616/030-000.

Notice:
Operation of the adjacent I/O modules requires a supply module.

The 750-621 Distance Module has power jumper contacts that can supply the power to adjacent I/O modules.

End Module



Figure: 750-600



Item Description	End Module
Version	Standard
Item No.	Extended temperature
Order Text	750-600/025-000 End Module

Technical Data

Surrounding air temperature (operation)	0 ... +55 °C	-20 ... +60 °C
Dimensions W x H x D	12 x 69.8 x 100 mm	

Approvals

Data sheet and further information, see:

End Module	
Standard	Extended temperature
750-600	750-600/025-000
End Module	End Module; T

0 ... +55 °C -20 ... +60 °C

12 x 69.8 x 100 mm

CE; IECEx Marine; UL OrdLoc/HazLoc;

ATEX/IECEx

wago.com/750-600

This end module must be snapped onto the assembly at the end of a fieldbus node. The end module completes the internal data bus, ensuring flawless data transmission.

„ Mini-WSB marker card and mounting accessories,
see Section "Accessories and Tools"

„ Approvals and corresponding ratings,
see page 523 or www.wago.com